


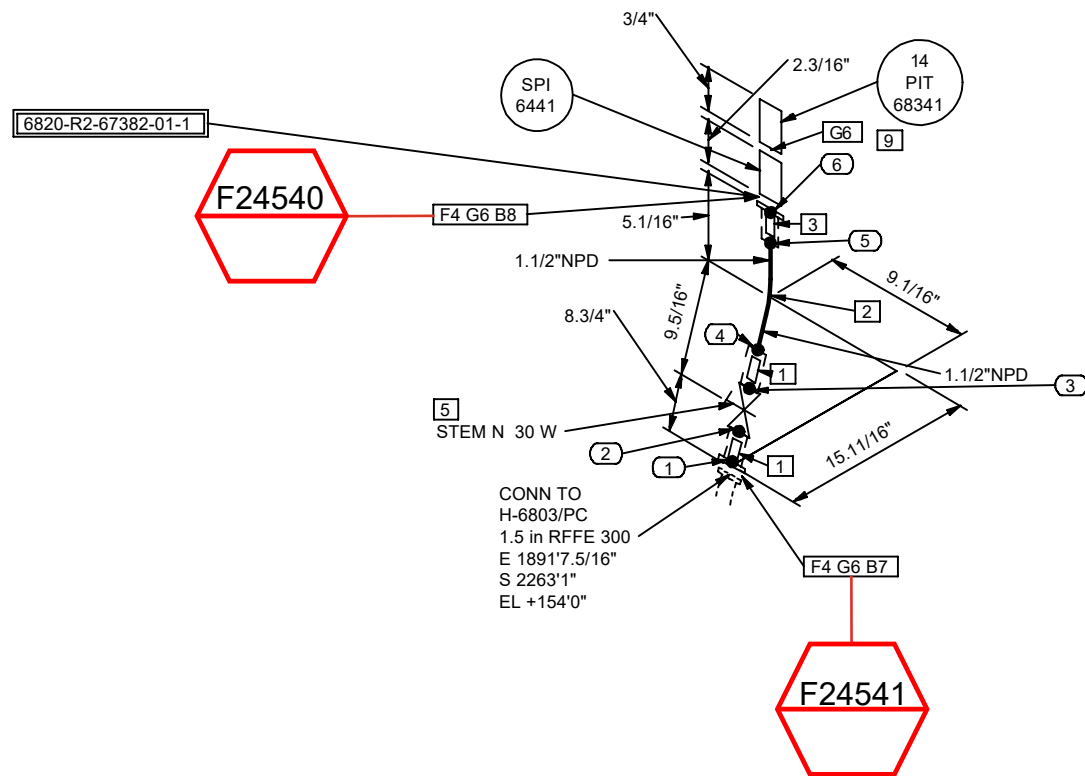

Filler Material Requisition

Date: 2-26-25
Line Class: SIPG-CS01
WPS: 10245
Electrode: ER70S-2
Signature: *Glenn Sumrall Jr.*

COORDINATE SYSTEM : PLANTCOORDINATES

NOTES:

- FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
- FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
- FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
- FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
- ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
- FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
- REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

0	2025-02-21	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR		
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD		

SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
1	1.1/2	Nipple, ASTM A106 Gr.B, PE, L = 6in, -, S-XS	C24617A	2
2	1.1/2	90° Elb, ASME B16.11, ASTM A105N, 3000 Lbs, SW Ends, -,	CDF66G5F	1
3	1.1/2	Nipple, ASTM A106 Gr.B, PE, L = 3in, -, S-XS	C24614D	1
4	1.1/2	SW Flg, ASME B16.5, ASTM A105N, 300 Lbs, RF/SW End, -, x S-XS	CFG70GNH	2
5	1.1/2	Gat Fem, API 602, ASTM A105N, 800 Lbs, SW Ends, HO, -, Valve Tag: VG-6	C7J7XW3N	1

OTHER THAN SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
6	1.1/2	SW Gk, AISI 304/Graphite, 300 Lbs, RF as per ASME B16.5, Thk=1/8in, -, -,	CGKFEG5X	3
7	3/4	SBlit 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3.5 in. Length	C6S4K8B9	4
8	3/4	SBlit 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 5.75 in. Length	C6S4K8BJ	4

INSTRUMENTS

9	1.1/2	14-PIT-68341	14-PIT-68341	1
---	-------	--------------	--------------	---

PIECE MARKS

6820-R2-67382-01-1



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -	
 OxyChem Redstone Battleground PROJECT				P&ID: 202998C-001-PID-0021-0320				
				UNIT#: 6800	LEWP AREA: 6820	SPEC: SIPG-CS01	STRESS CALC #: -	
				LINE No: 1.5"-R2-67382-SIPG-CS01-P				
				DRAWING NUMBER 6820-R2-67382-01			REV. 0	

