


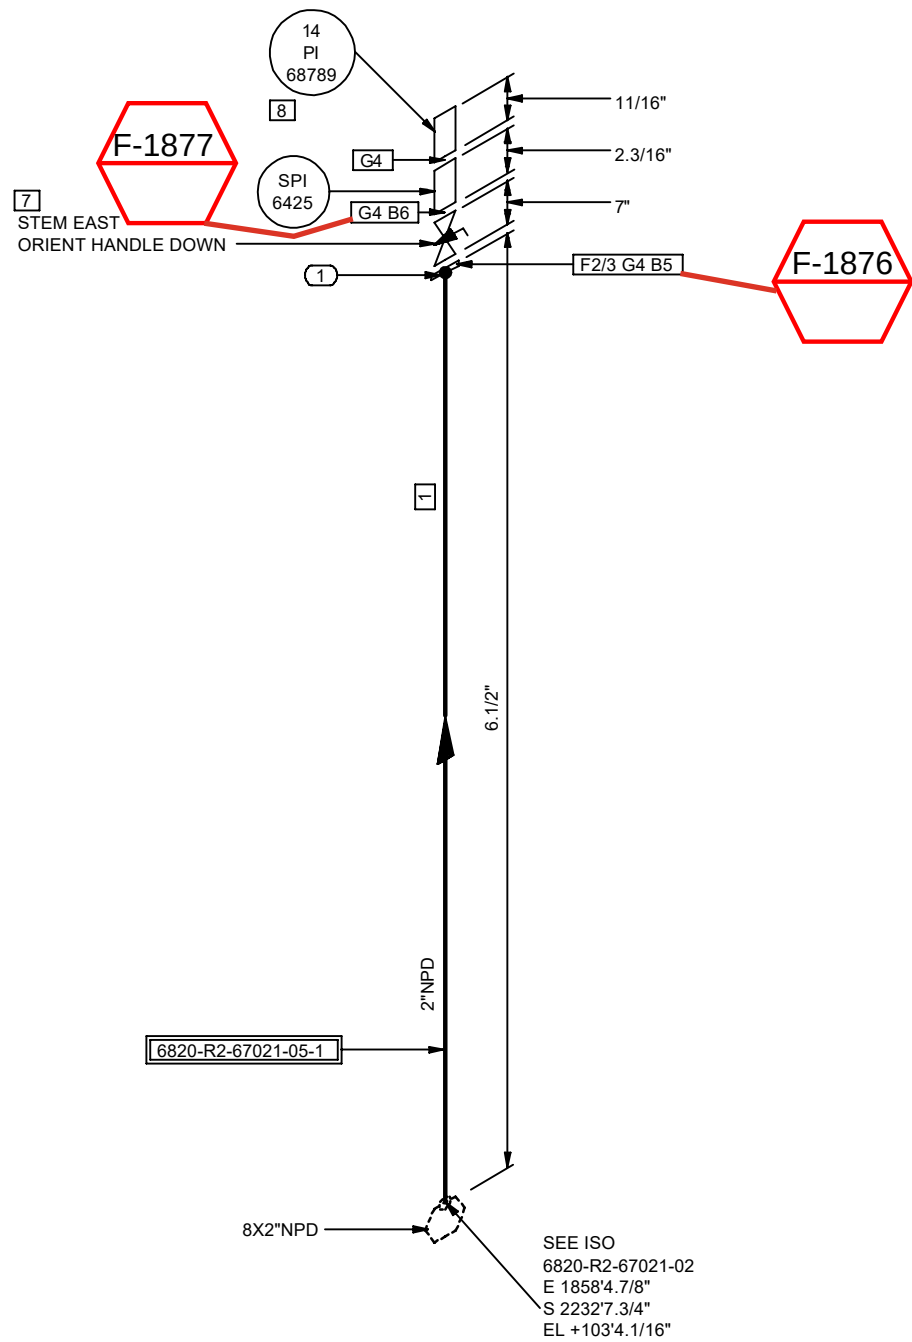

Filler Material Requisition
Date: 8-6-24
Line Class: NOHD-NI03
WPS: 4130
Electrode: NO FIELD WELDS
Signature: Pedro Morin

COORDINATE SYSTEM : PLANTCOORDINATES

NOTES:

- FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
- FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
- FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
- FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
- ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
- FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
- REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

0	2024-08-02	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	BRD	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD

SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
1	2	Pipes, Seamless, ASME B36.19/B36.10, ASTM B161 UNS N02200, BE, -, -, S-10S	C7ZWWMT3	0.4
2	2	LJ Flg, ASME B16.5, ASTM A182 Gr.F316/316L, 150 Lbs, FF, -,	C15RCMLZ	1

MISCELLANEOUS COMPONENTS

3	2	Stub SP, Seamless, ASME B16.9, ASTM B366 Gr.WPN, BW Ends, -, -, x S-10S	C98MYDH1	1
---	---	---	----------	---

OTHER THAN SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
4	2	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, -, Thk=1/8in, -,	C6S4K87J	3
5	5/8	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3.25 in. Length	C6S4K88P	4
6	5/8	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 5.75 in. Length	C6S4K890	4
7	2	Plug Flg.SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM B564 UNS N02200, 150 Lbs, RF, Ends as per ASME B16.5, -, LO, -, -, Valve Tag: PL-1194	C99ZZ9D4	1

INSTRUMENTS

8	2	14-PI-68789	14-PI-68789	1
---	---	-------------	-------------	---

PIECE MARKS

6820-R2-67021-05-1



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -
				P&ID: 202998C-001-PID-0021-0322			
				UNIT#: 6800	LEWP AREA: 6820	SPEC: NOHD-NI03	STRESS CALC #: CN-0388
				LINE No: 2"-R2-67021-NOHD-NI03-H			
				DRAWING NUMBER 6820-R2-67021-05			
OxyChem Redstone Battleground PROJECT				REV. 0			

