



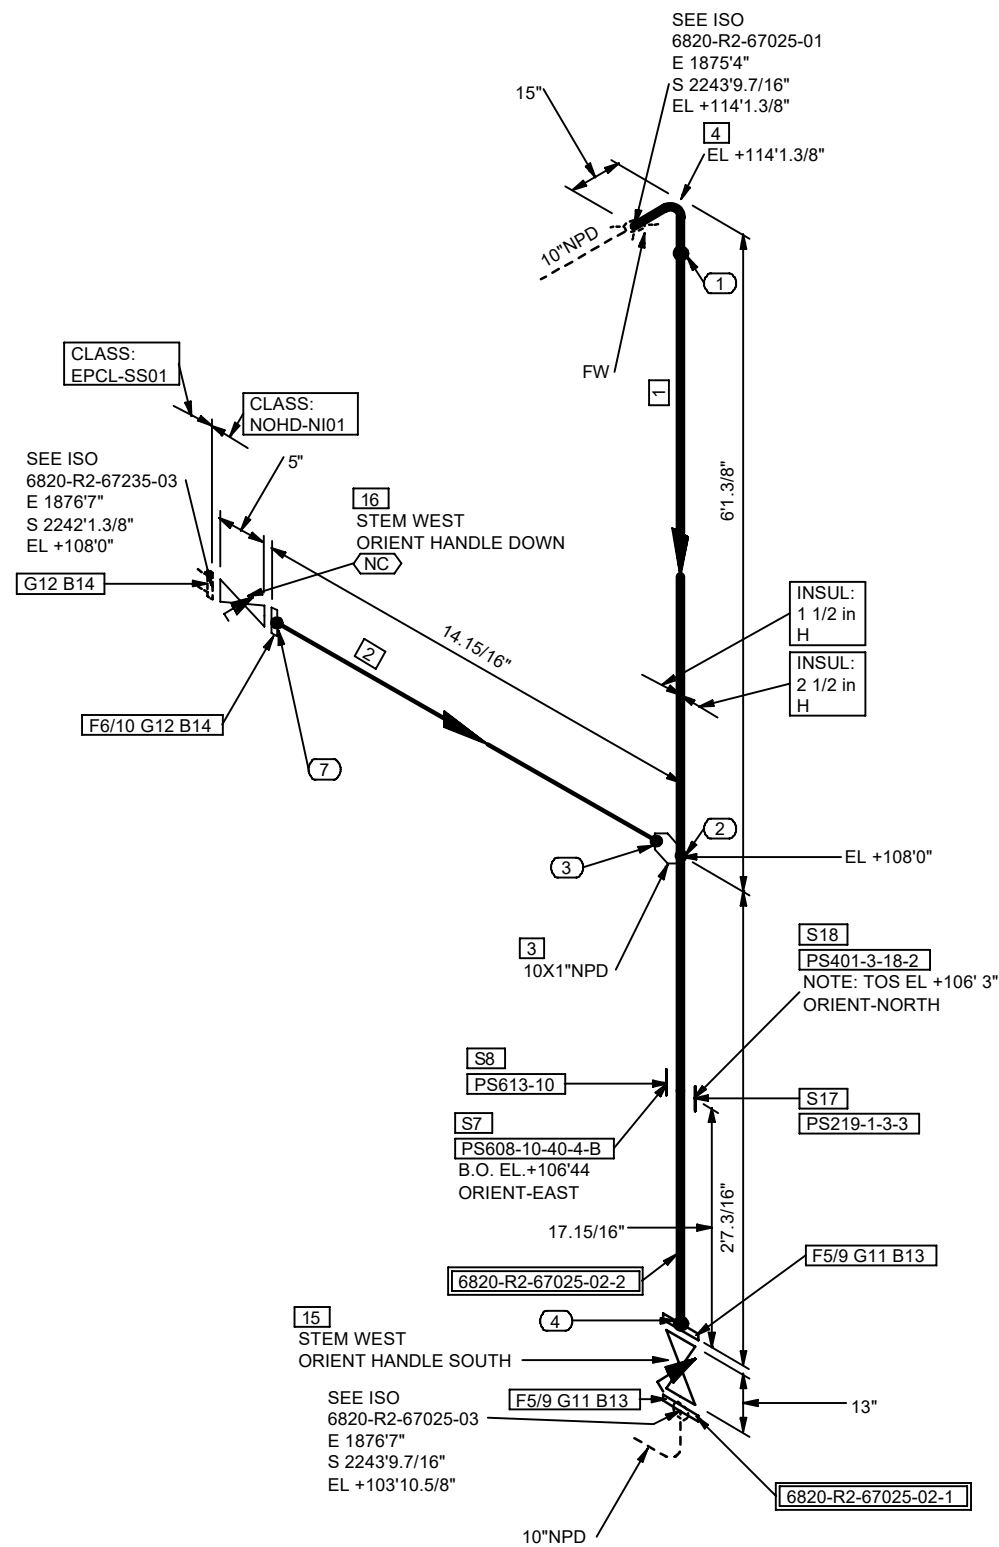

Signature: Glenn Sumrall J

1. FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC.
REFER TO LATEST REVISION OF LDT.
2. FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
3. FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
4. FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
5. ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
6. FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD
9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
7. REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



0	2024-11-08	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD

SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
1	10	Pipes, EFW, ASME B36.19/B36.10, ASTM B725 UNS N02200 annealed, BE, -, -, S-10S	C7ZWWMPEP	7.1
2	1	Pipes, Seamless, ASME B36.19/B36.10, ASTM B161 UNS N02200, BE, -, -, S-10S	C7ZWWMNV	0.6
3	10X1	Weldolet, MSS SP-97, ASTM B366 Gr.WPN, BW Ends, Annealed, S-10S	C7ZWZWCA	1
4	10	90° Elb LR, Seamless, ASME B16.9, ASTM B366 Gr.WPN, BW Ends, -,Annealed, S-10S	C7ZWWZN1	1
5	10	LJ Flg, ASME B16.5, ASTM A105 Galv. as per ASTM A153, 150 Lbs, FF, -,	C26WFFFA	2
6	1	LJ Flg, ASME B16.5, ASTM A105 Galv. as per ASTM A153, 150 Lbs, FF, -,	C26WFFF7	1
<u>PIPE SUPPORTS</u>				
7	10	PS608-10-40-4-B	PS608	1
8	10	PS613-10	PS613	1
<u>MISCELLANEOUS COMPONENTS</u>				
9	10	Stub SP, Seamless, ASME B16.9, ASTM B366 Gr.WPN, BW Ends, -,Annealed, x S-10S	C8A5GXS2	2
10	1	Stub SP, Seamless, ASME B16.9, ASTM B366 Gr.WPN, BW Ends, -,Annealed, x S-10S	C8A5GXNL	1
<u>OTHER THAN SHOP MATERIALS</u>				
NO	NPD	DESCRIPTION	IDENT	QTY
11	10	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, -, Thk=1/8in, -,	C6SBWZET	2
12	1	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, -, Thk=1/8in, -,	C6S4K87F	2
13	7/8	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 5 in. Length	C6S4K8CU	24
14	1/2	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 2.75 in. Length	C6S4K87U	8
15	10	Plug Flg.SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM A494 Gr.CZ100, 150 Lbs, RF, Ends as per ASME B16.5, -, GO,-, -, Valve Tag: PL-0503	C8P7NJJW	1
16	1	Plug Flg.SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM B564 UNS N02200, 150 Lbs, RF, Ends as per ASME B16.5, -, LO,-, -, Valve Tag: PL-0503_LO	C8RR9V37	1
<u>PIPE SUPPORTS</u>				
17	10	PS219-1-3-3	PS219	1
18	10	PS401-3-18-2	PS401	1
<u>PIECE MARKS</u>				
6820-R2-67025-02-1 6820-R2-67025-02-2				



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -	
				PID: 202998C-001-PID-0021-0322				
				UNIT#: 6800	LEWP AREA: 6820	SPEC: NOHD-NI01	STRESS CALC #: CN-0387	
				LINE No. 10"-R2-67025-NOHD-NI01-H				
				DRAWING NUMBER 6820-R2-67025-02			REV. 0	
				OxyChem Redstone Battleground PROJECT				