



Ulf Skutnabba, twitter: @skutis77

Konami GX945Sheet: /CPU Master/
File: cpu_master.kicad_sch**Title: Gradius 3**Size: A3 Date: 2024-04-11
KiCad E.D.A. kicad-cl 7.0.10-7.0.10-ubuntu20.04.1

Rev: 2/12

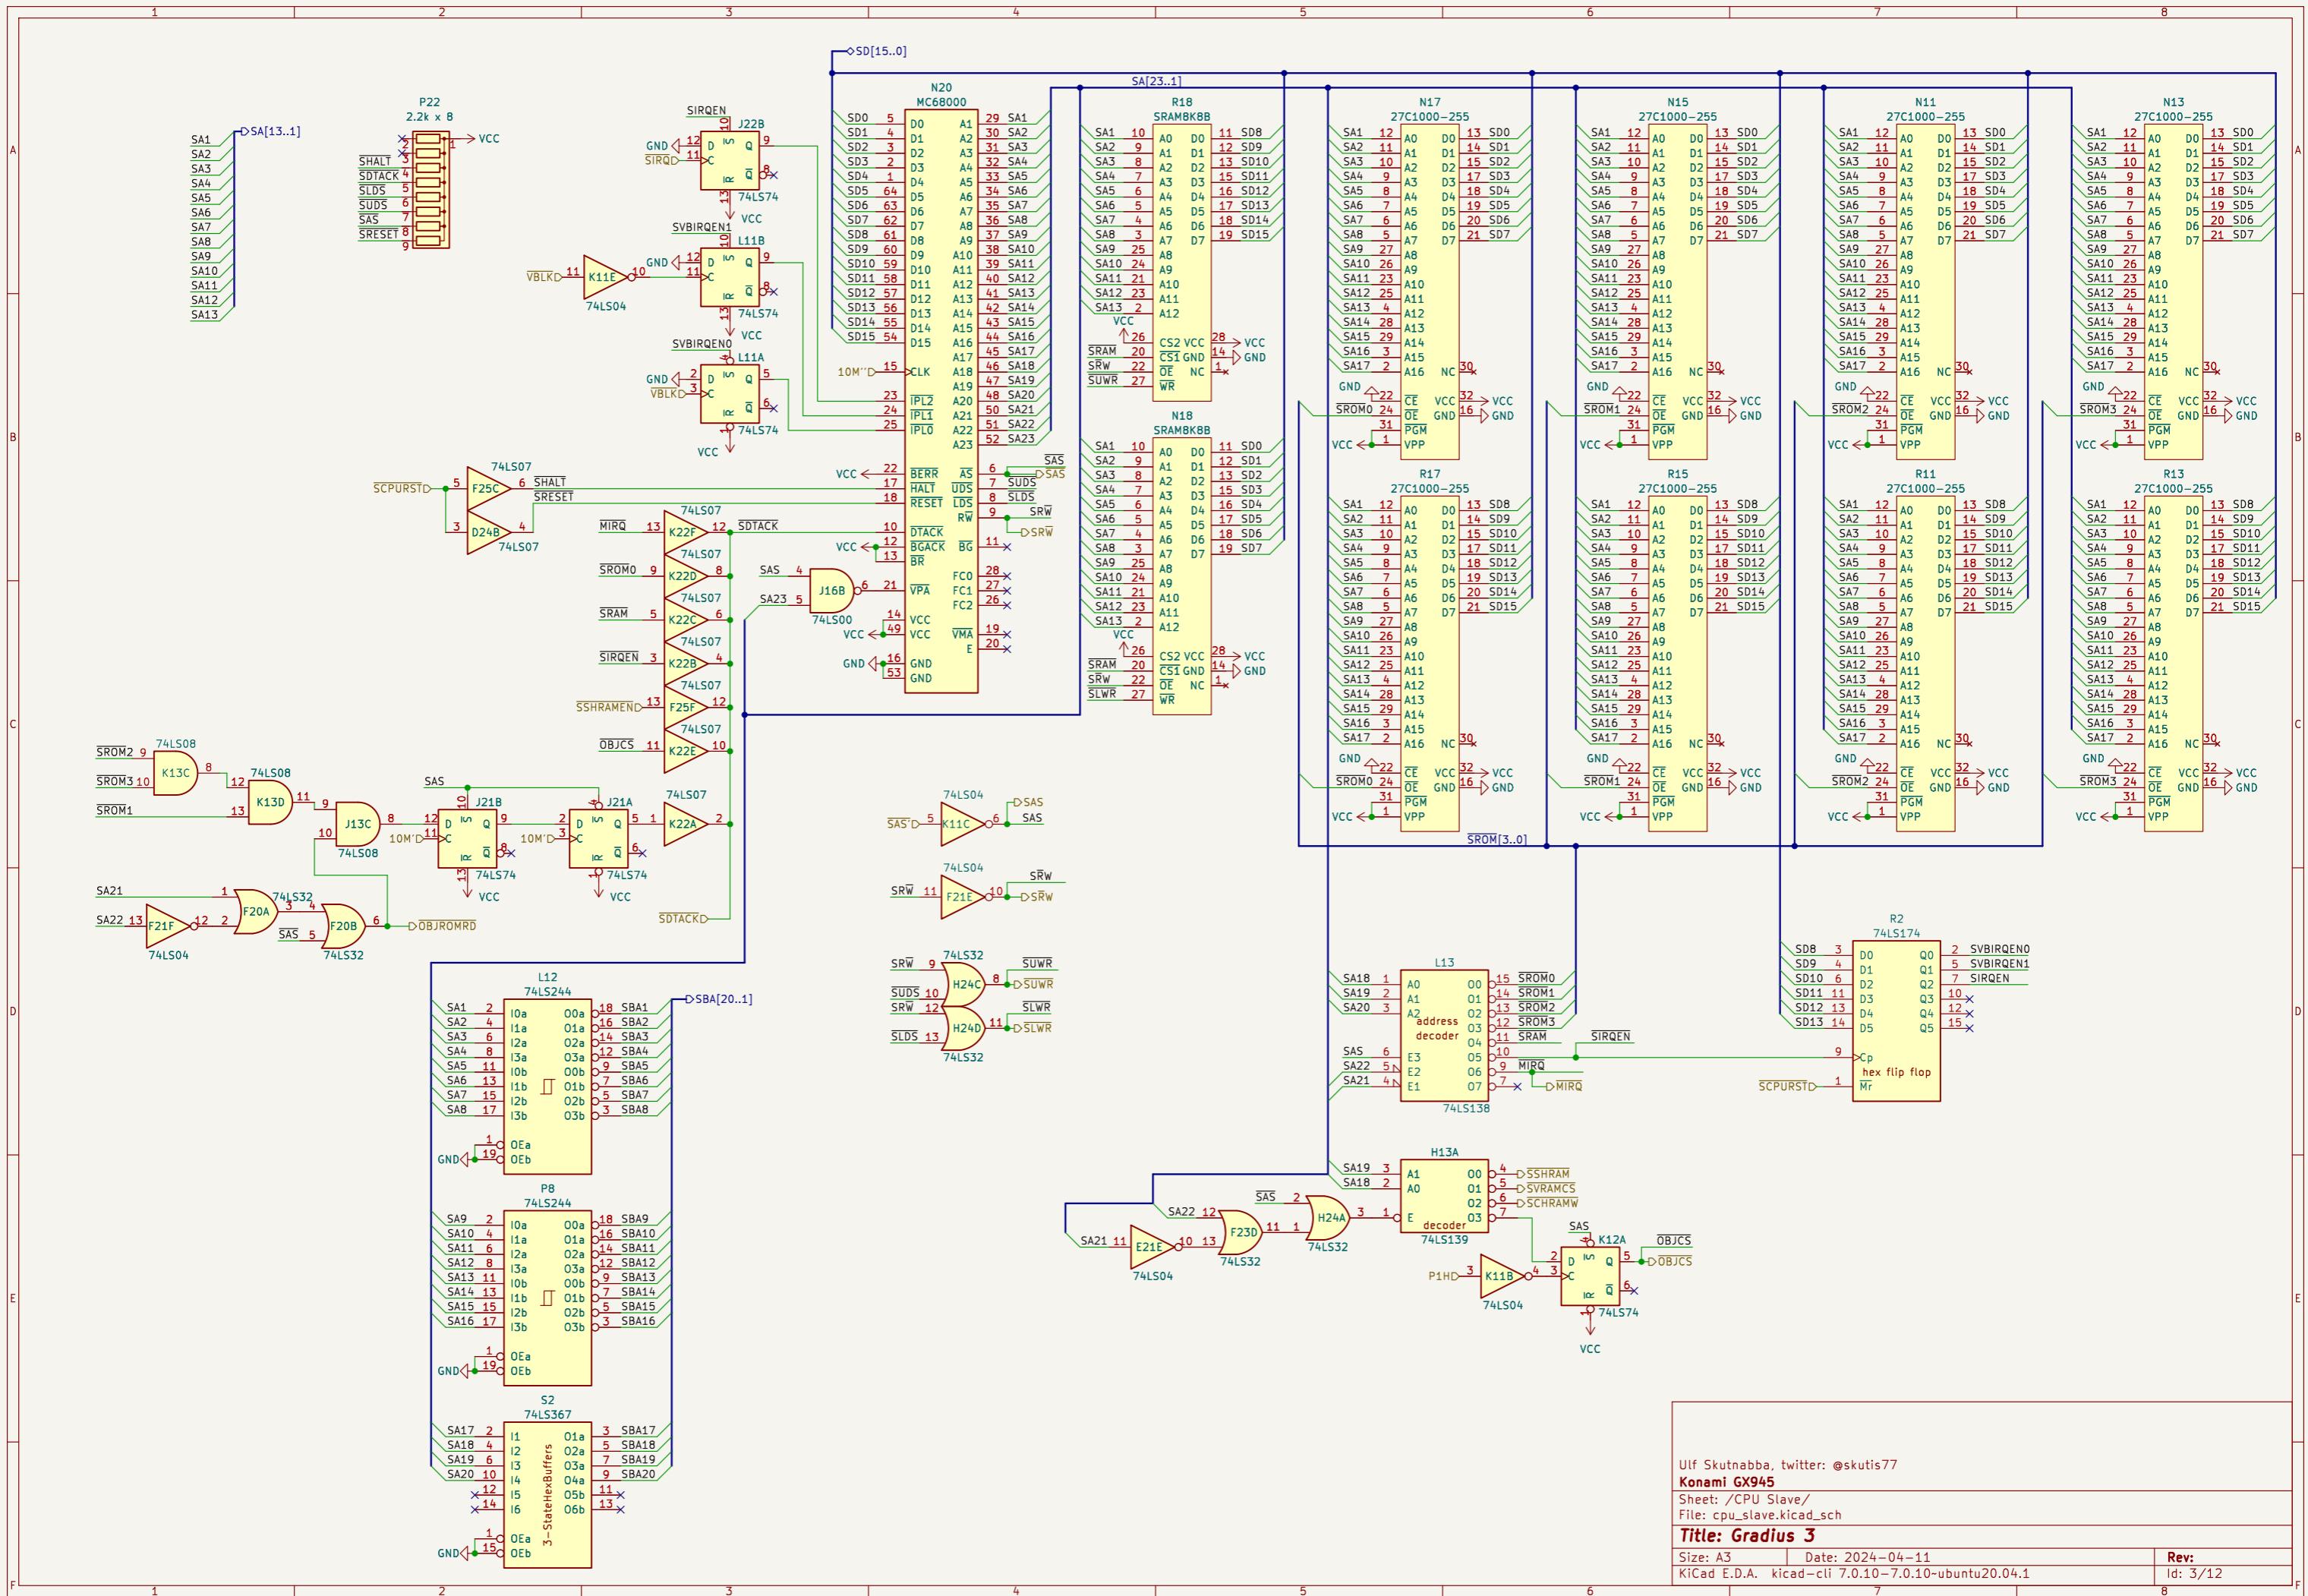

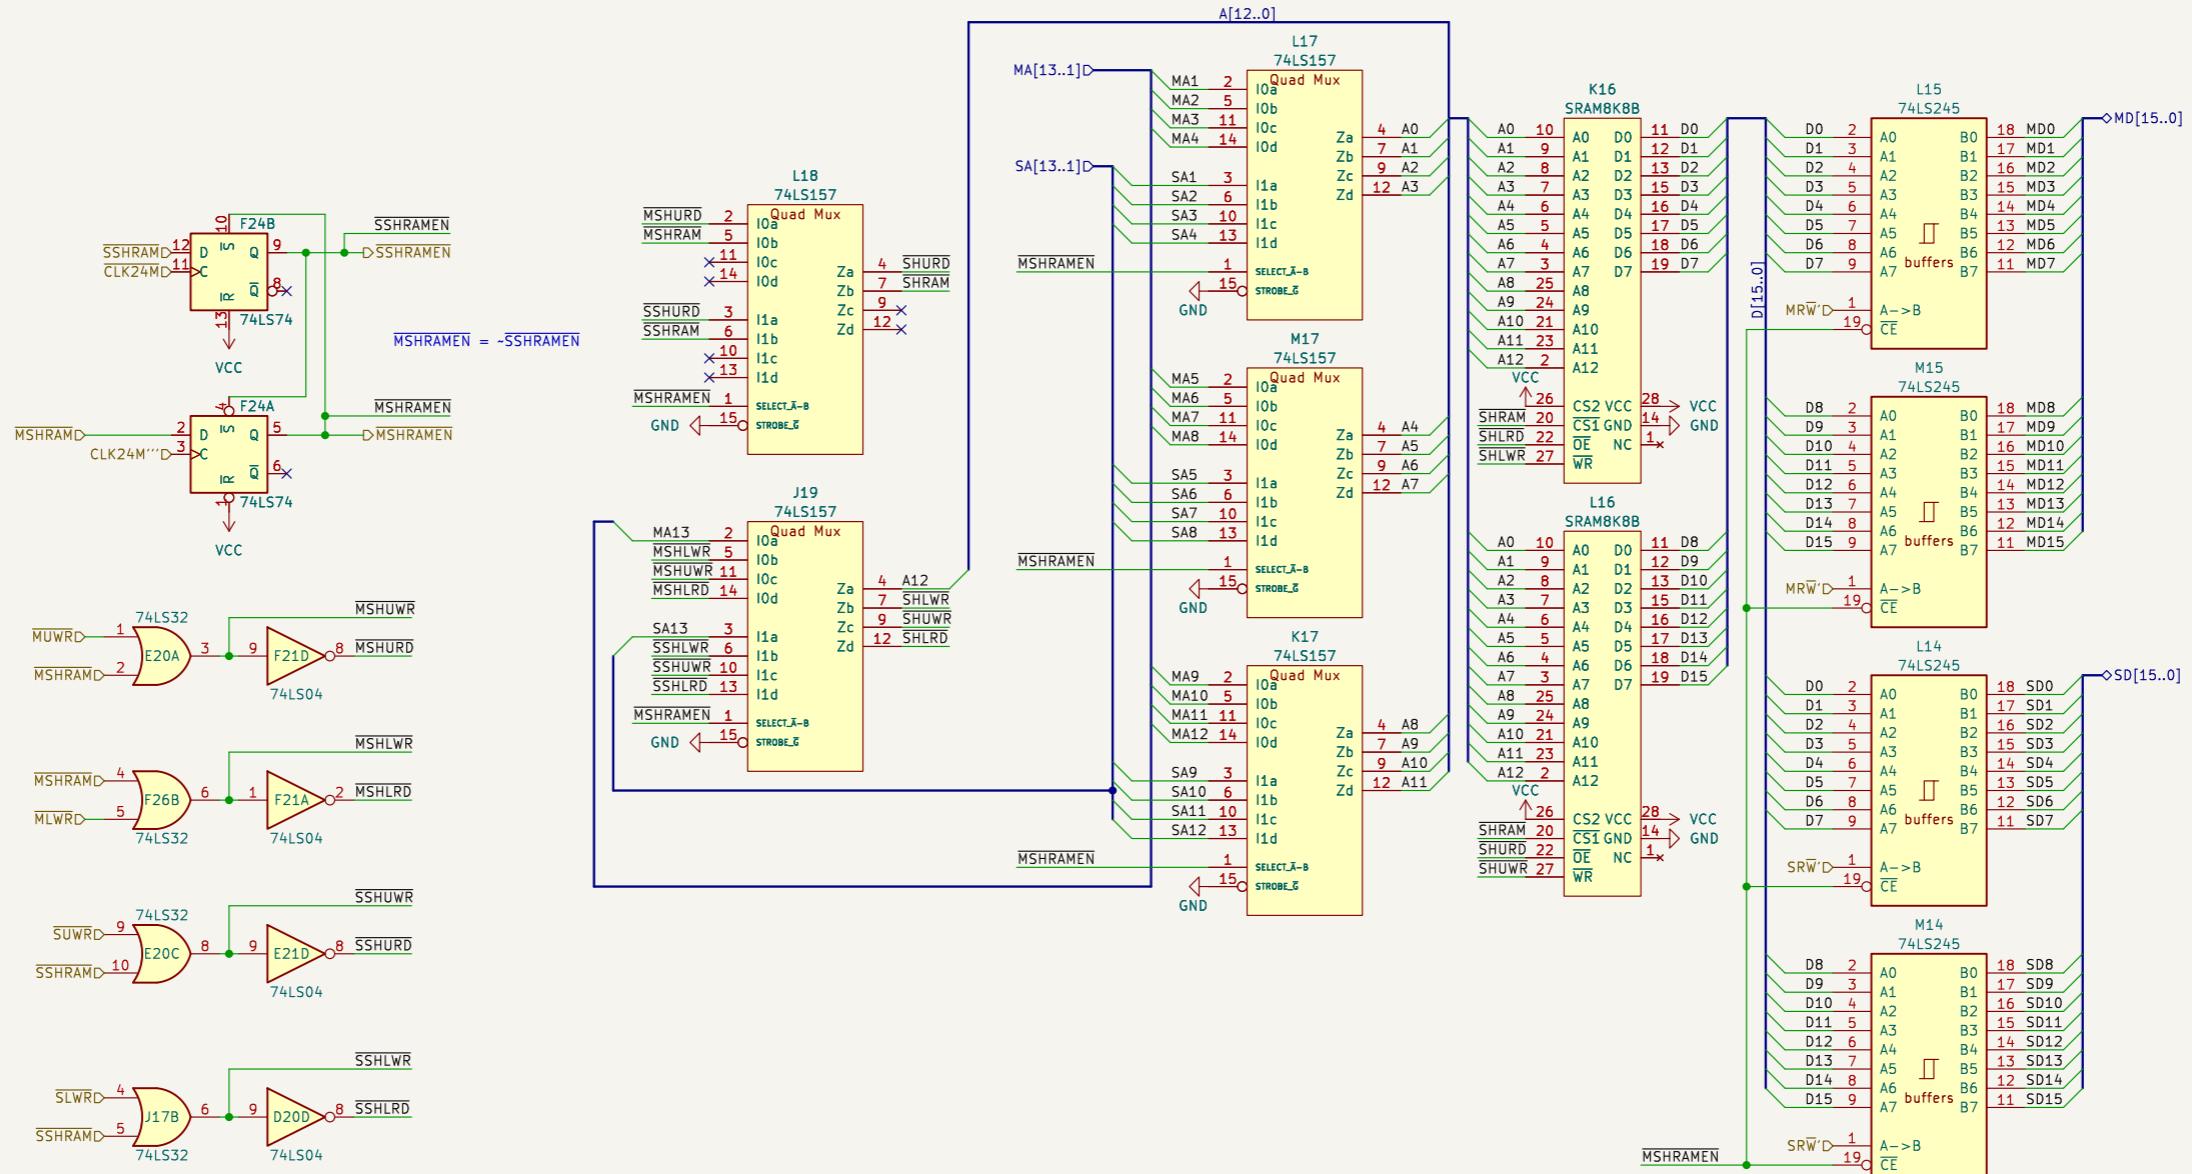

Ulf Skutnabba, twitter: @skutis77

Konami GX945

Sheet: /Shared RAM/


File: shram.kicad_sch

Title: Gradius 3Size: A3 Date: 2024-04-11
KiCad E.D.A. kicad-cl 7.0.10-7.0.10-ubuntu20.04.1


Rev: Id: 4/12

1 2 3 4 5 6 7 8


A

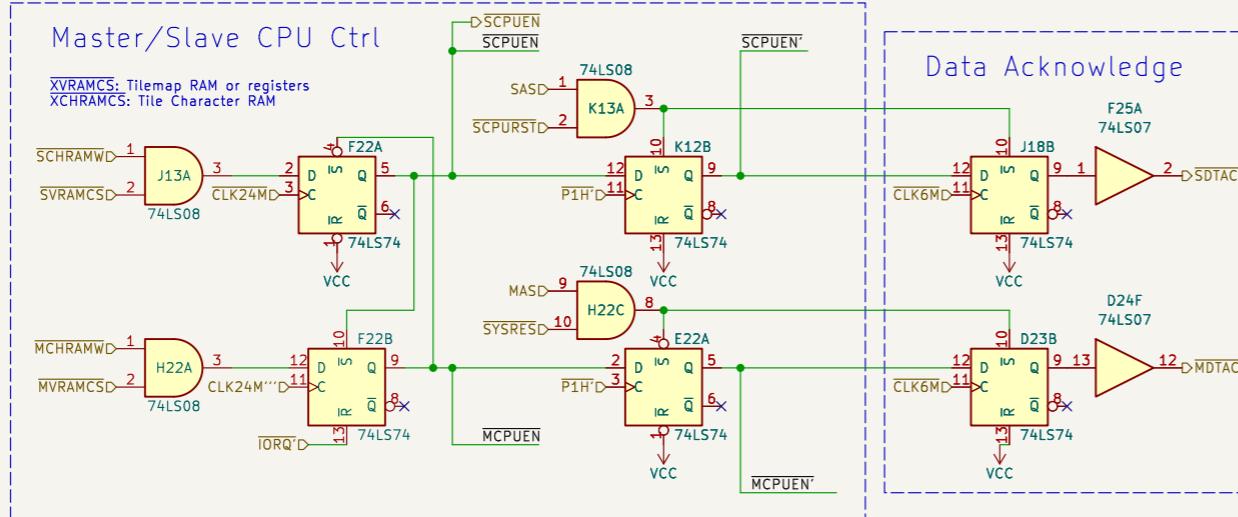

B

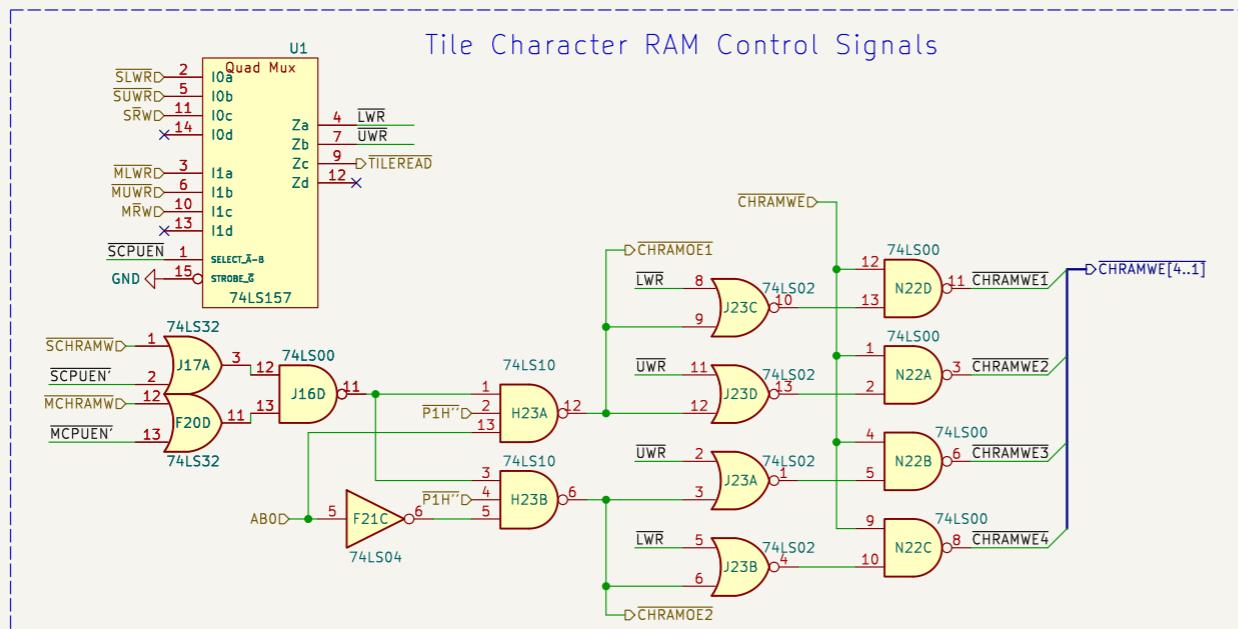

C

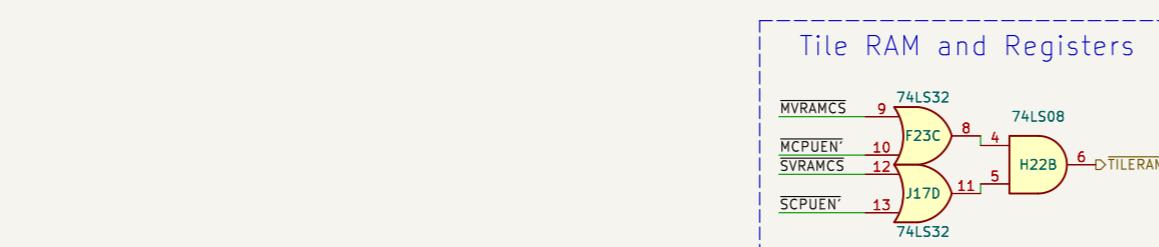


D

E

F

Tile Layers – Shared Data Bus

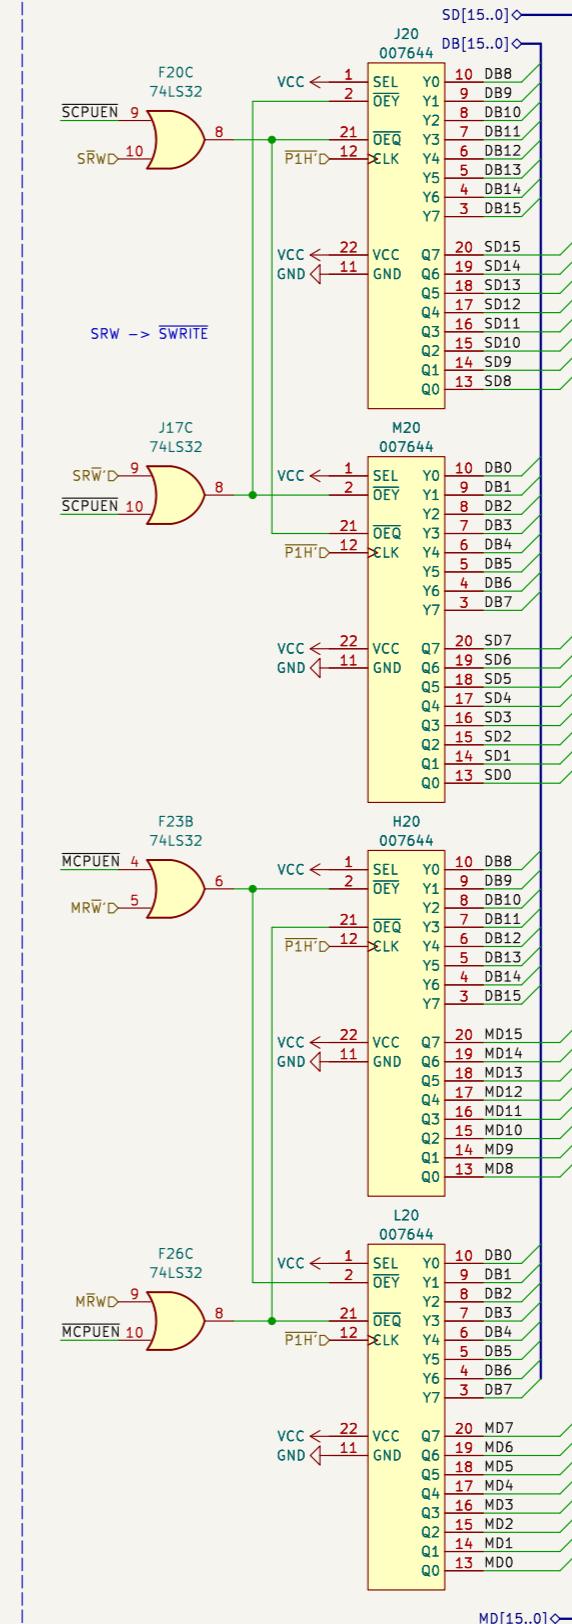

Ulf Skutnabba, twitter: @skutis77

Konami GX945

Sheet: /Tile Logic/


File: tile_logic.kicad_sch


Title: Gradius 3

Size: A3 Date: 2024-04-11
KiCad E.D.A. kicad-cli 7.0.10-7.0.10-ubuntu20.04.1

Rev: Id: 5/12

1 2 3 4 5 6 7 8

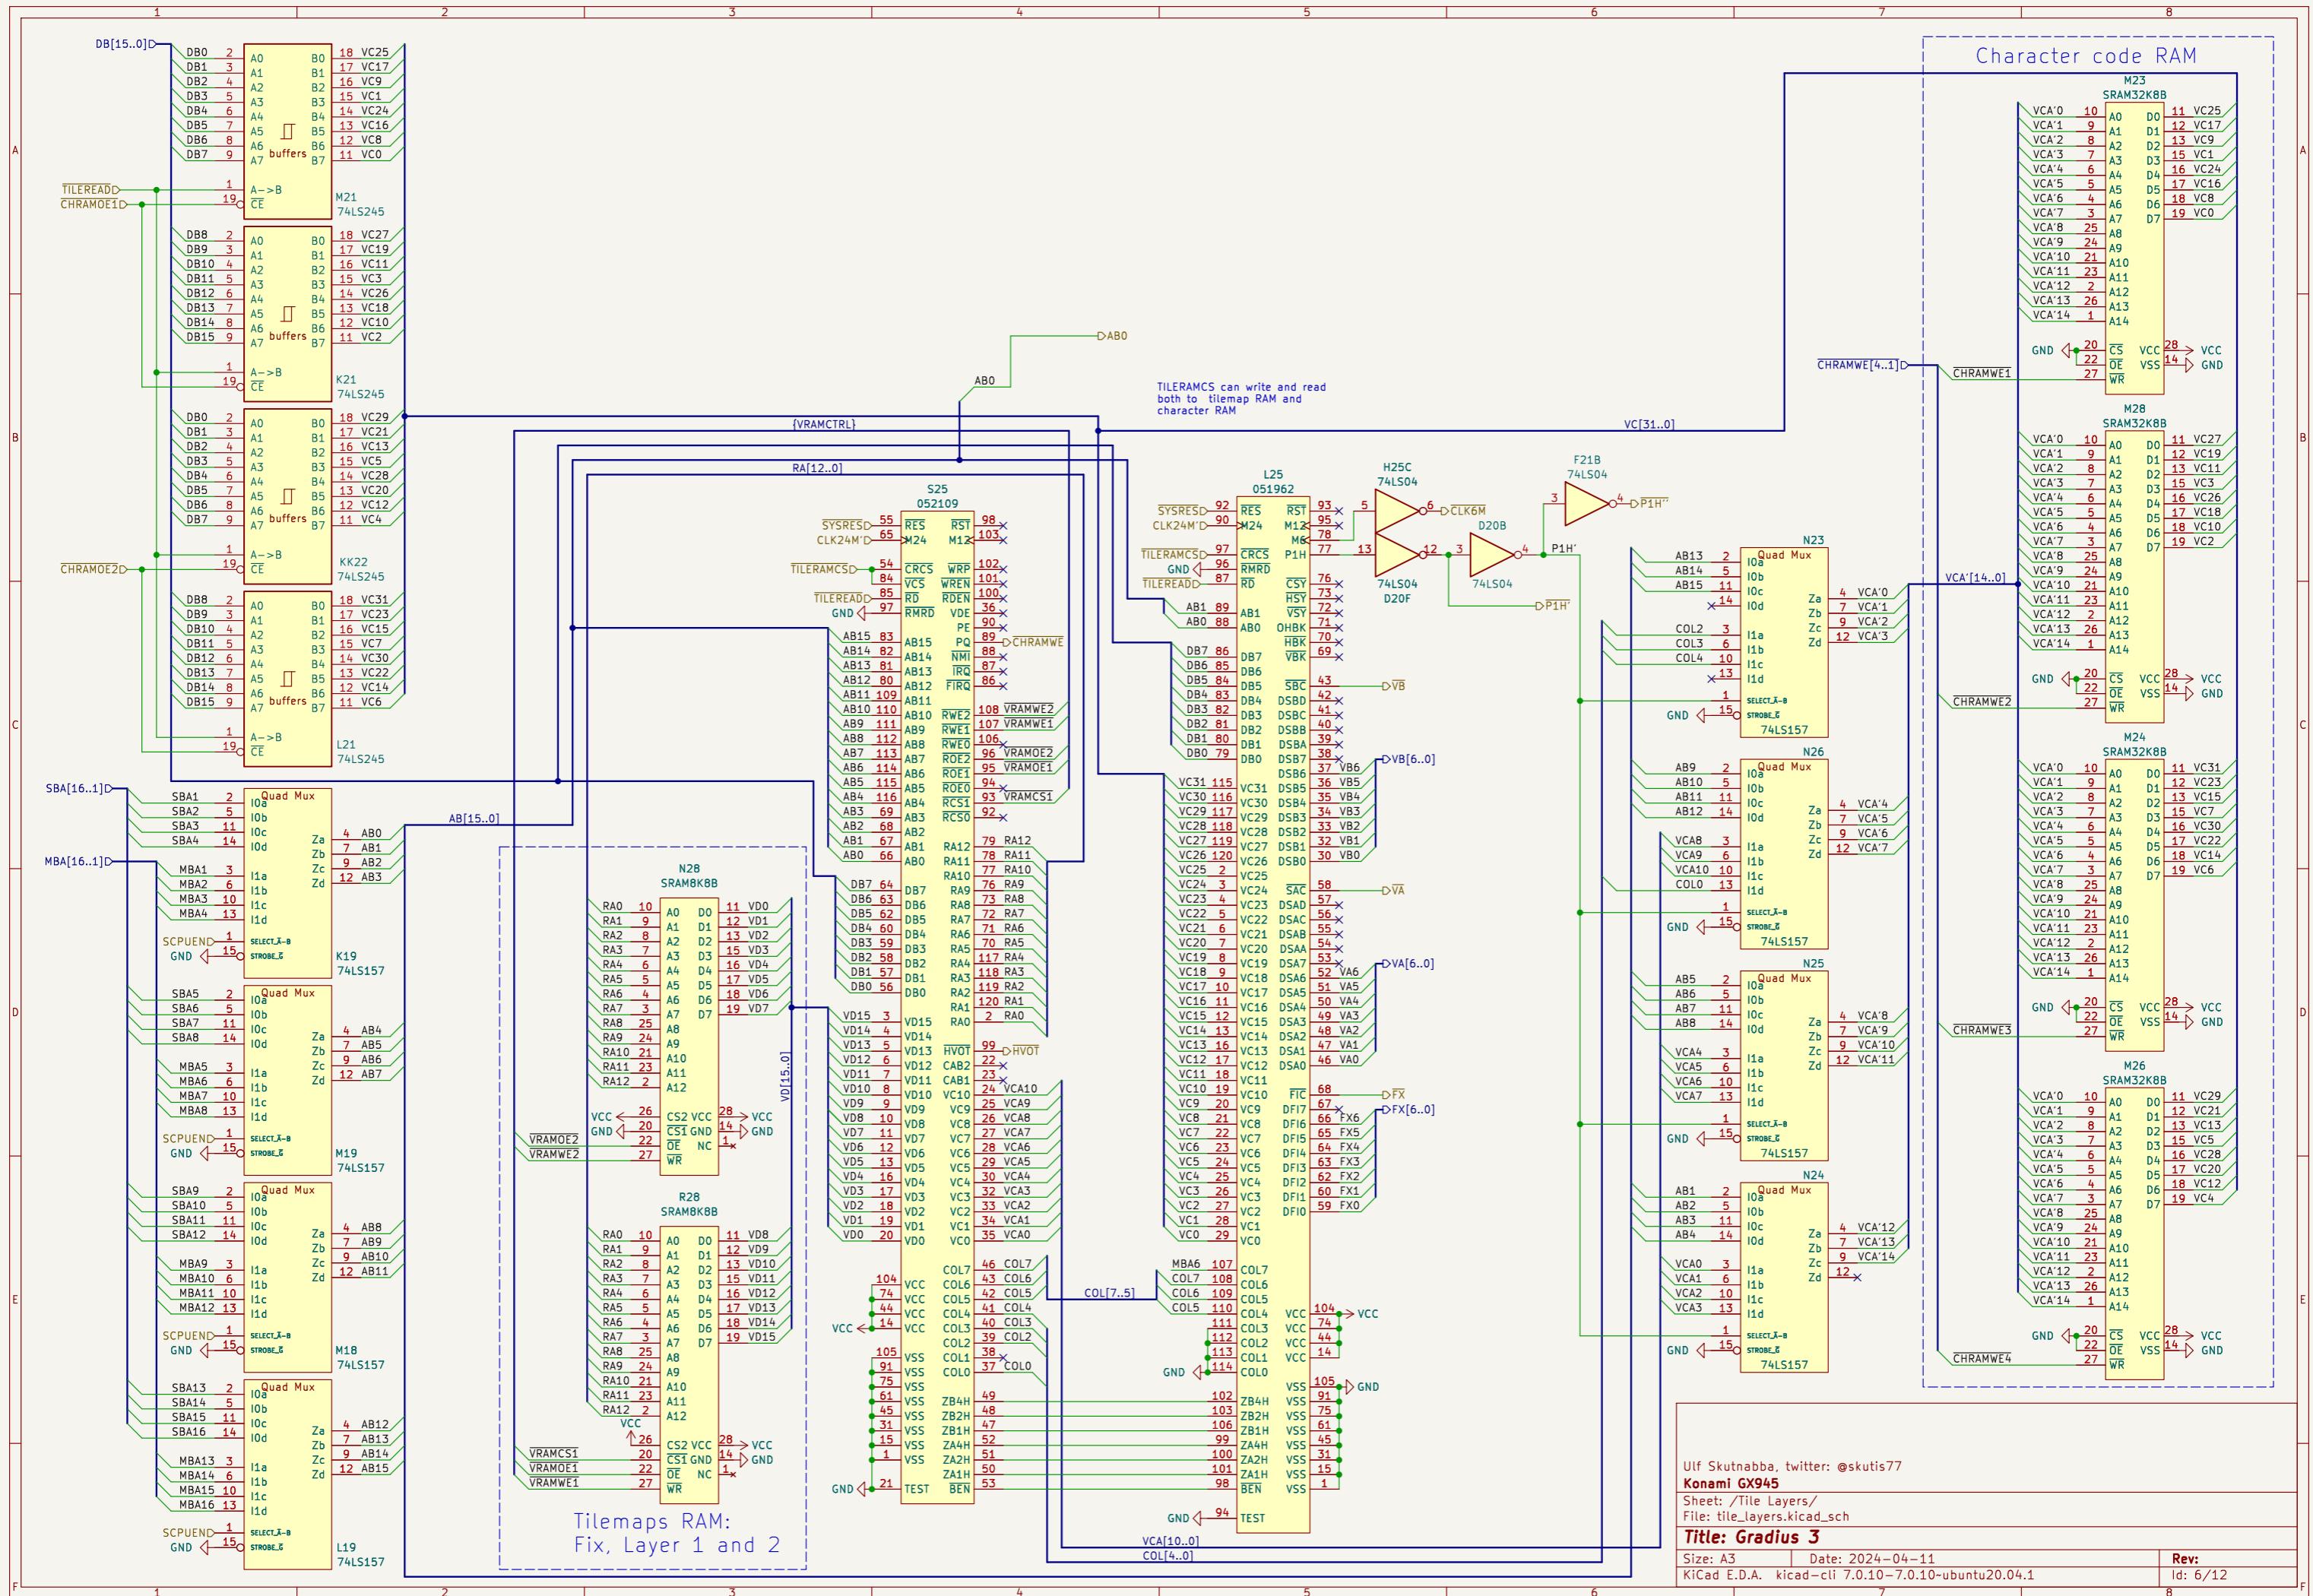

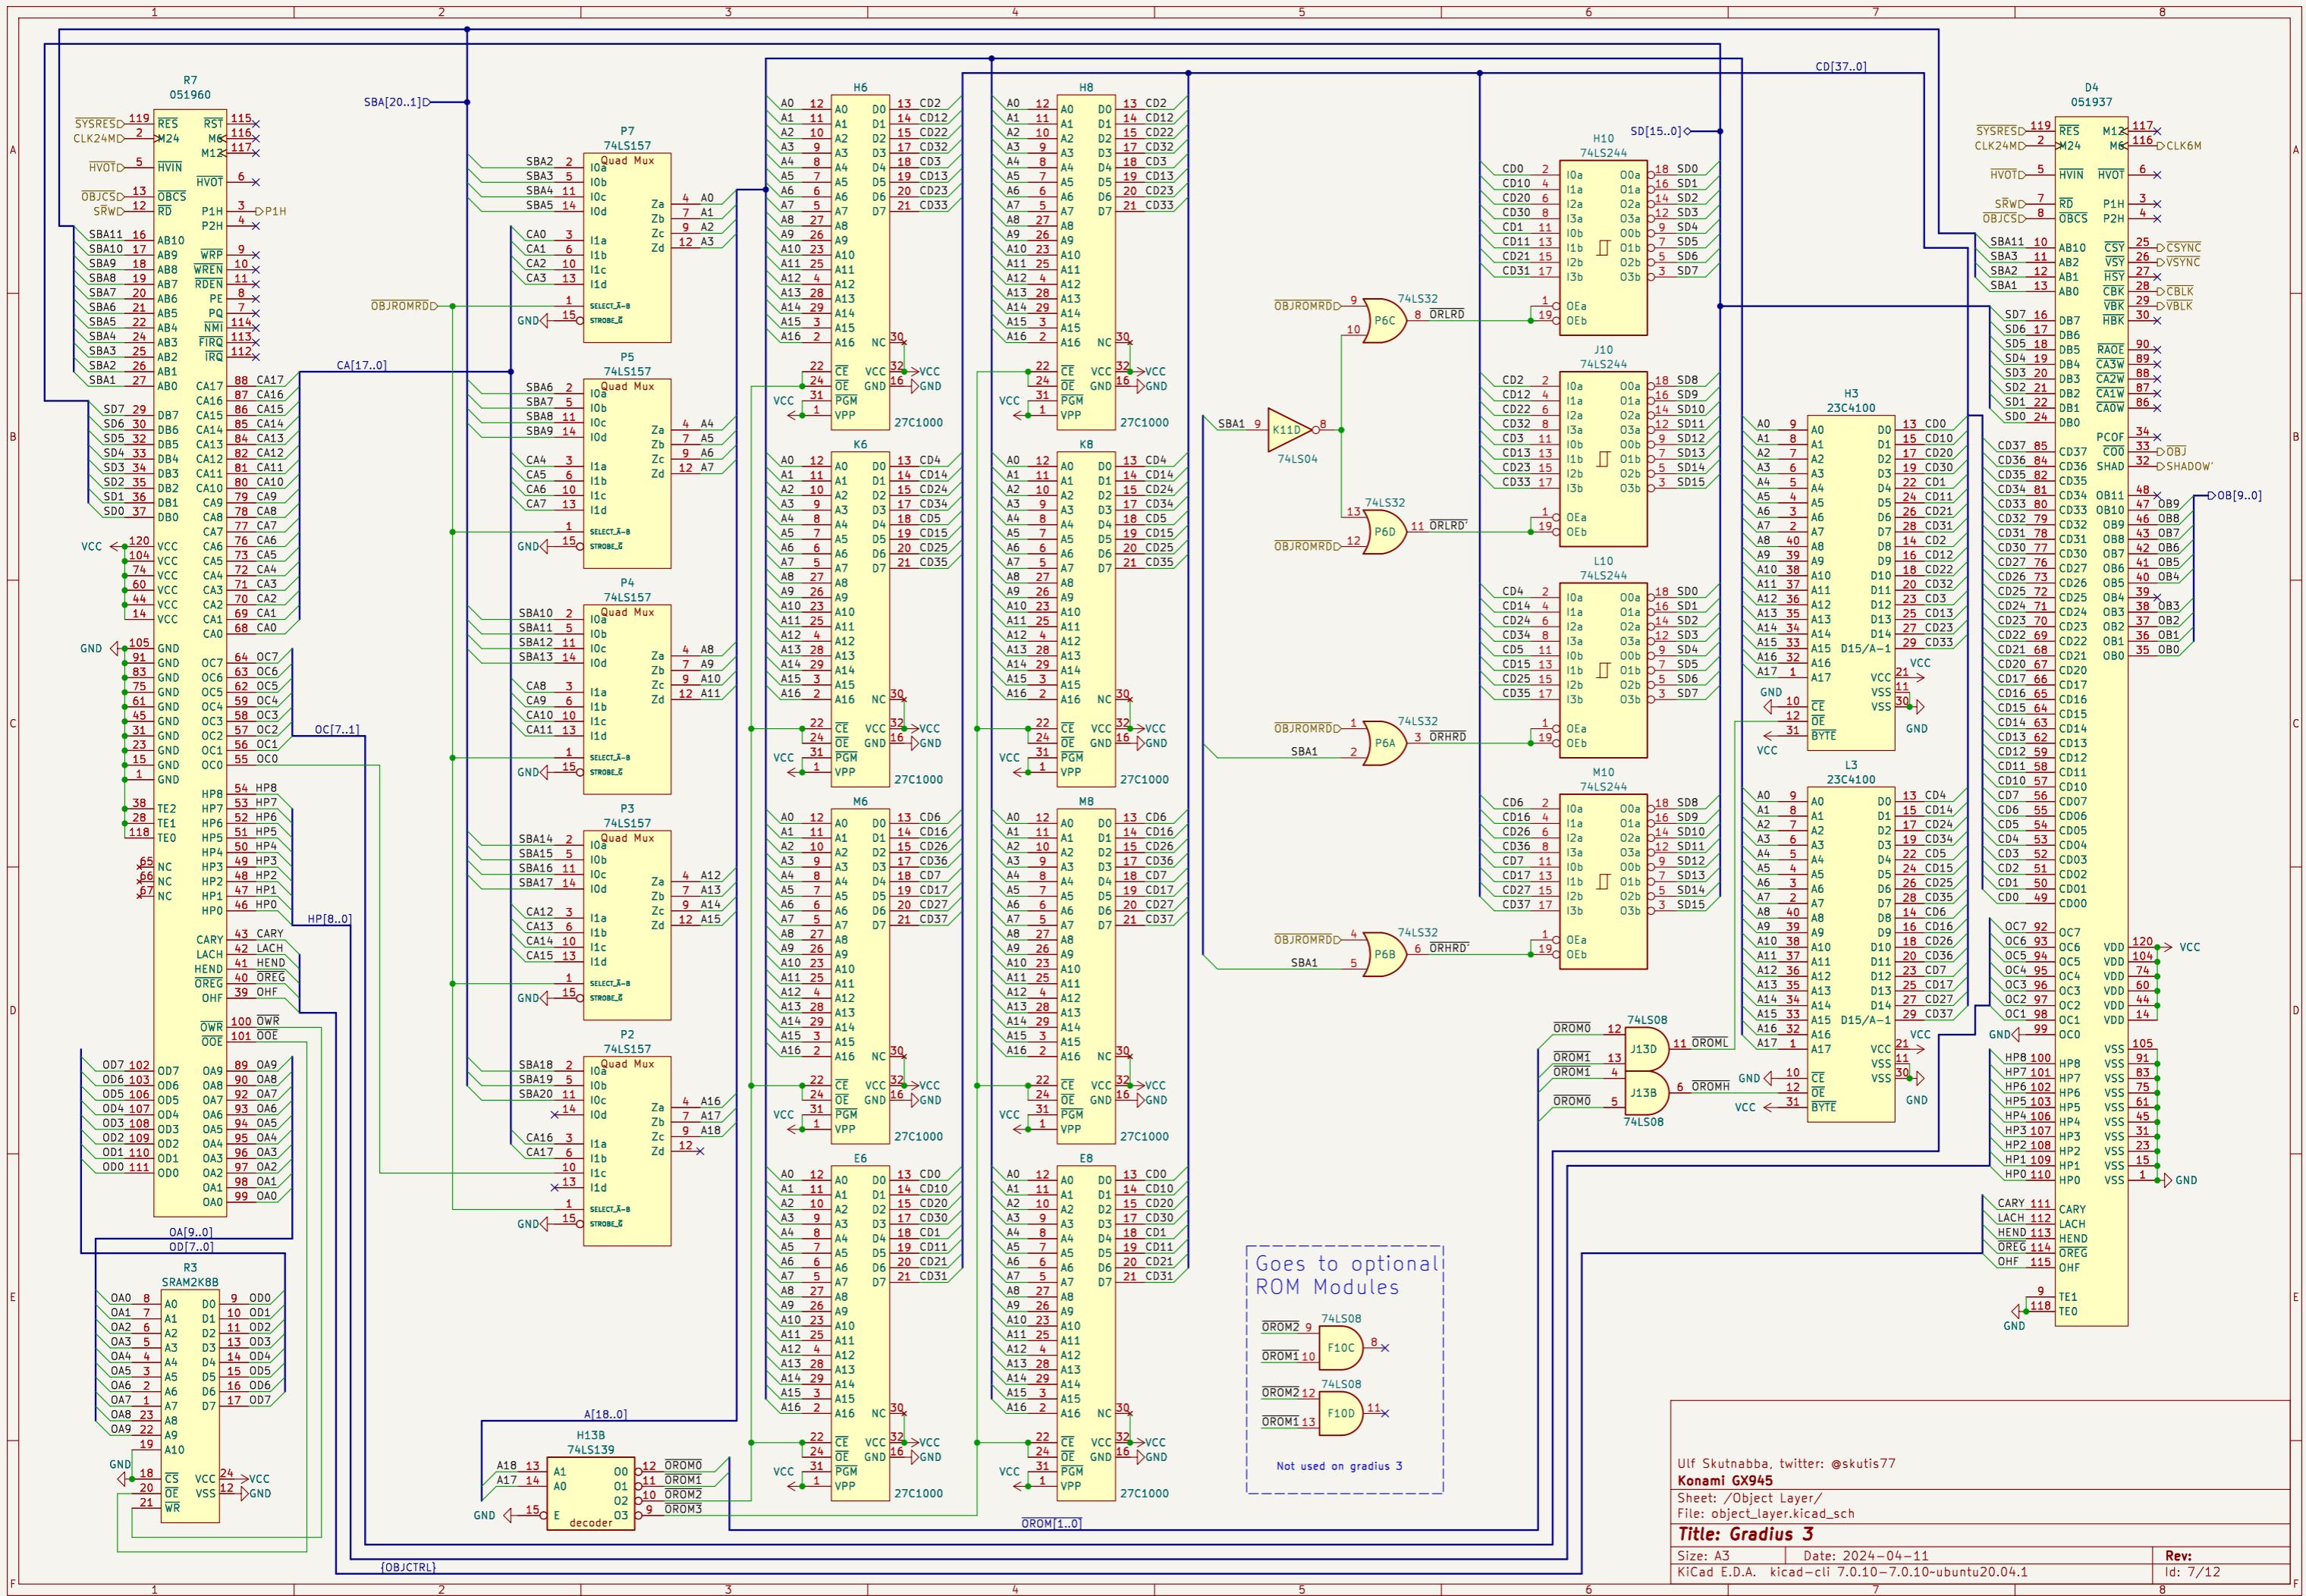



Ulf Skutnabba, twitter: @skutis77
Konami GX945
Sheet: /Object Layer/
File: object_layer.kicad_sch

Title: Gradius 3

Size: A3 Date: 2024-04-11
KiCad E.D.A. kicad-cl 7.0.10-7.0.10-ubuntu20.04.1

Rev: Id: 7/12

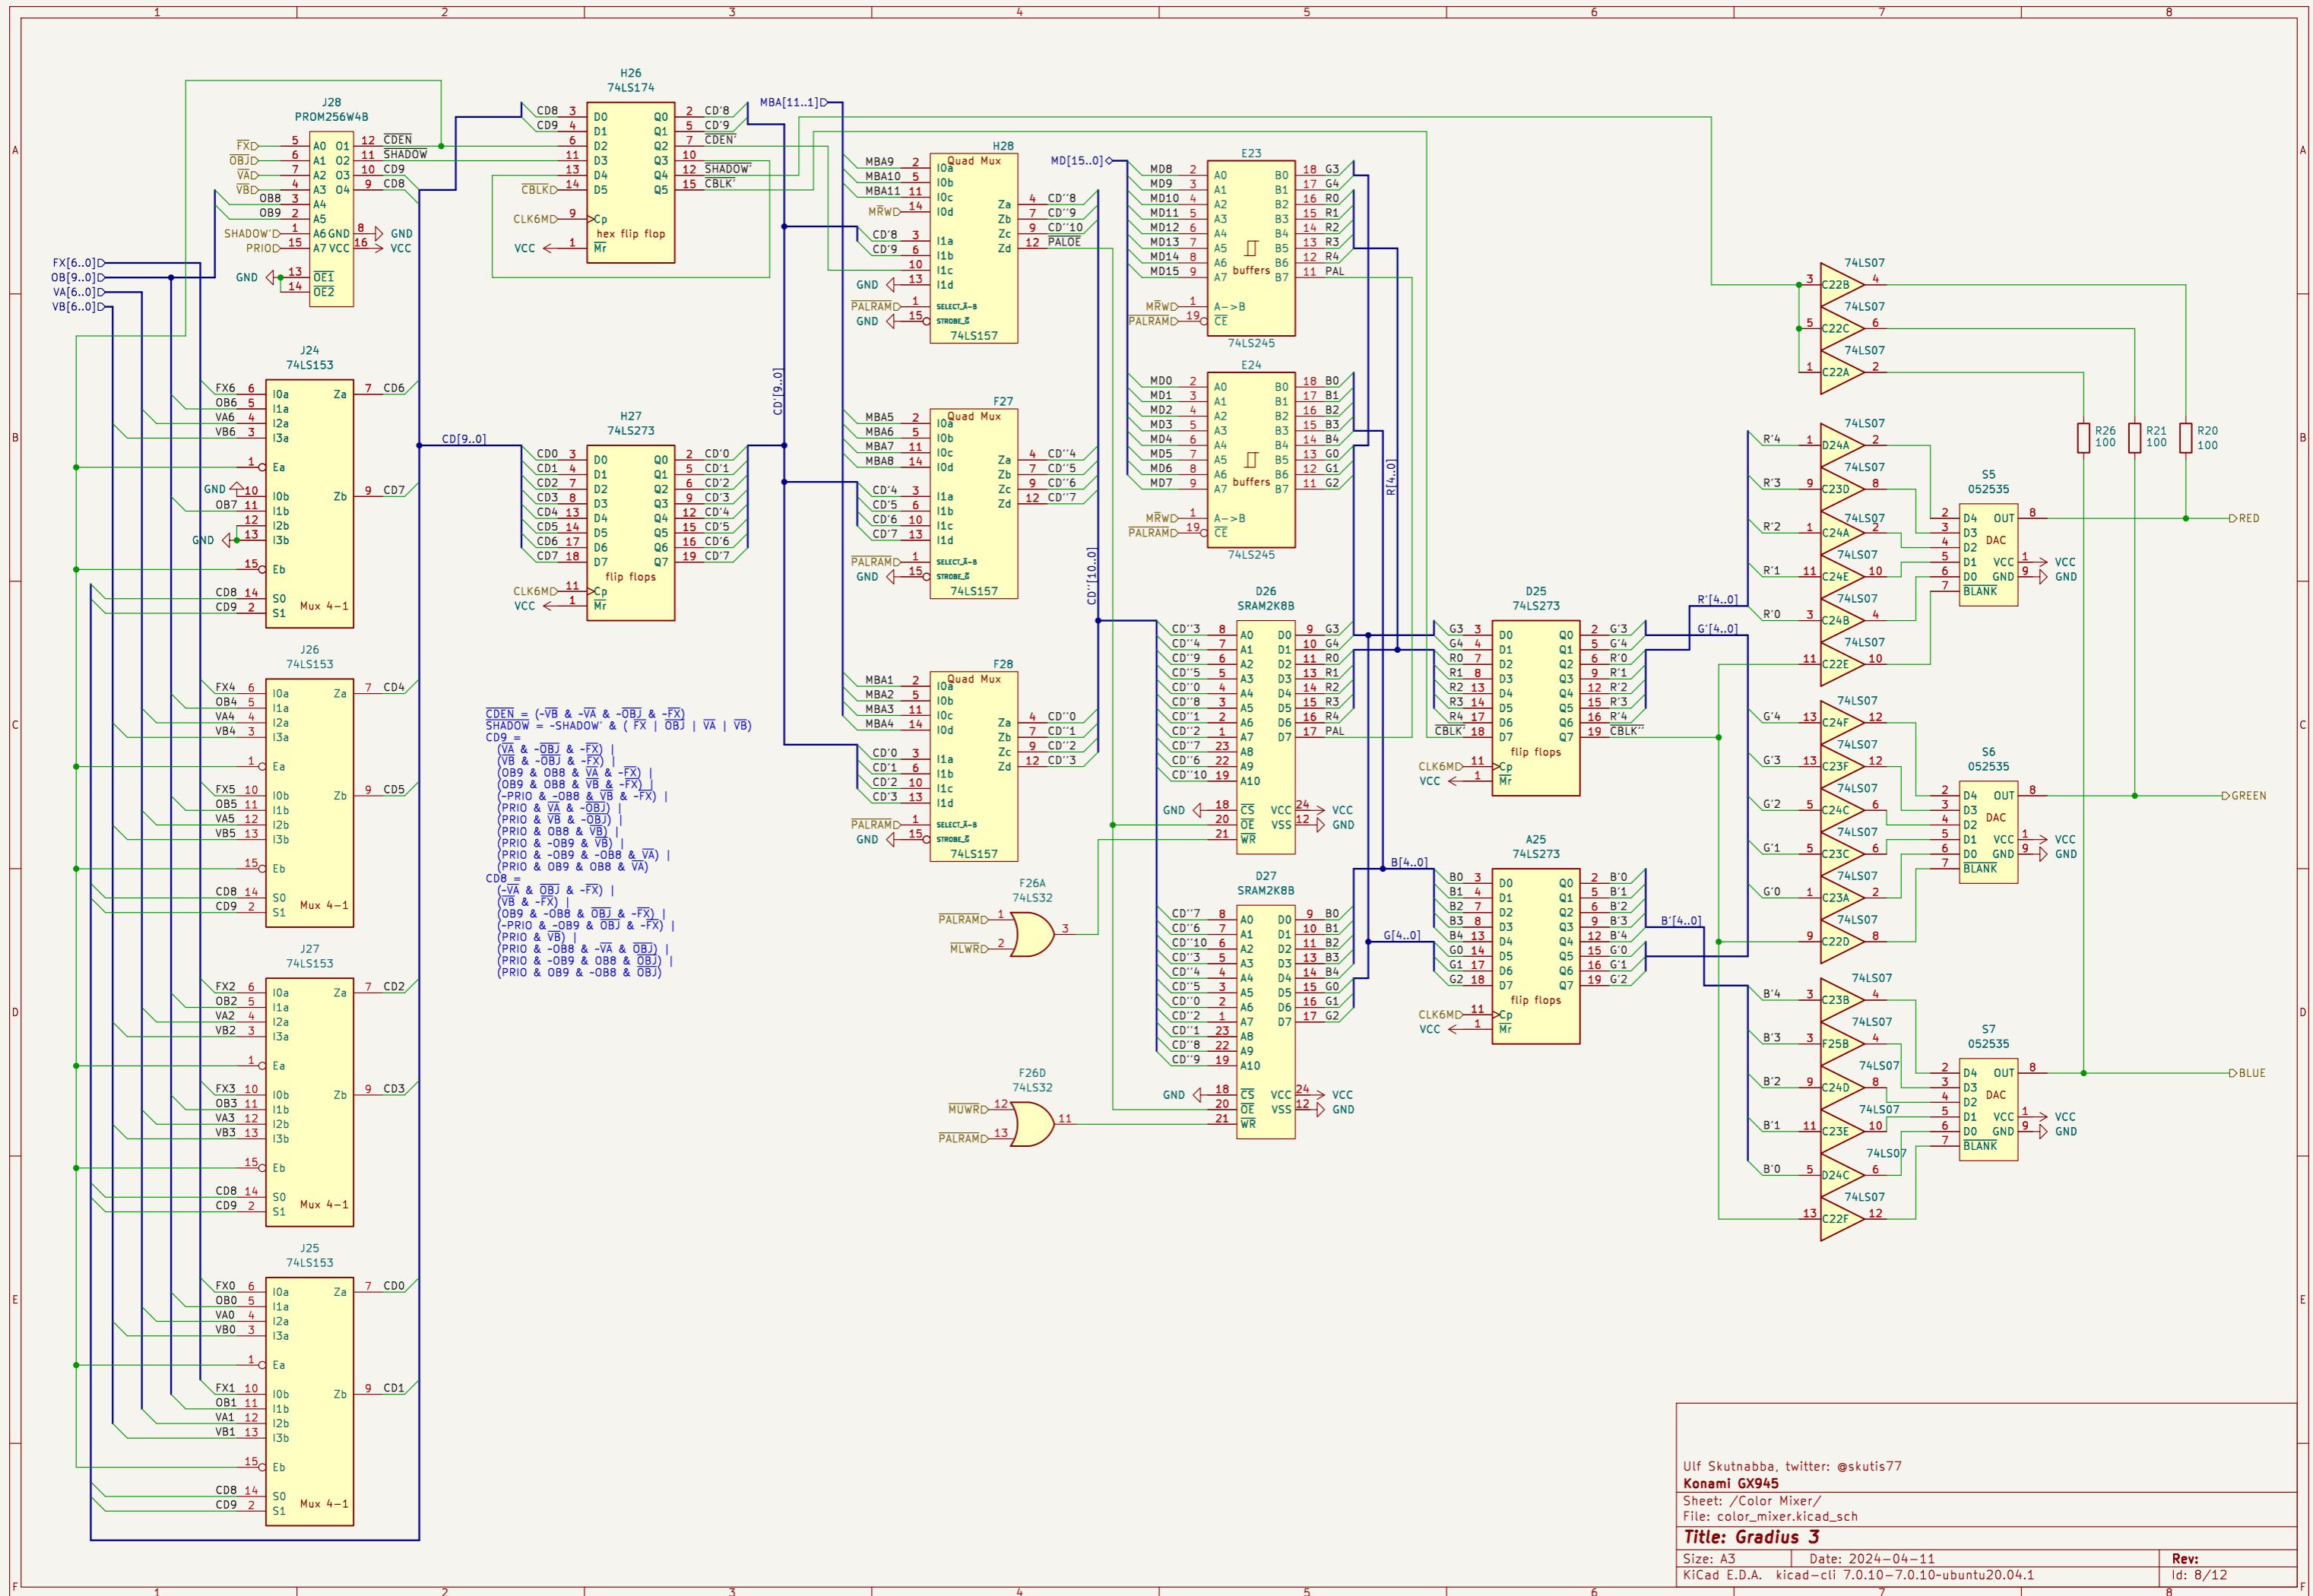

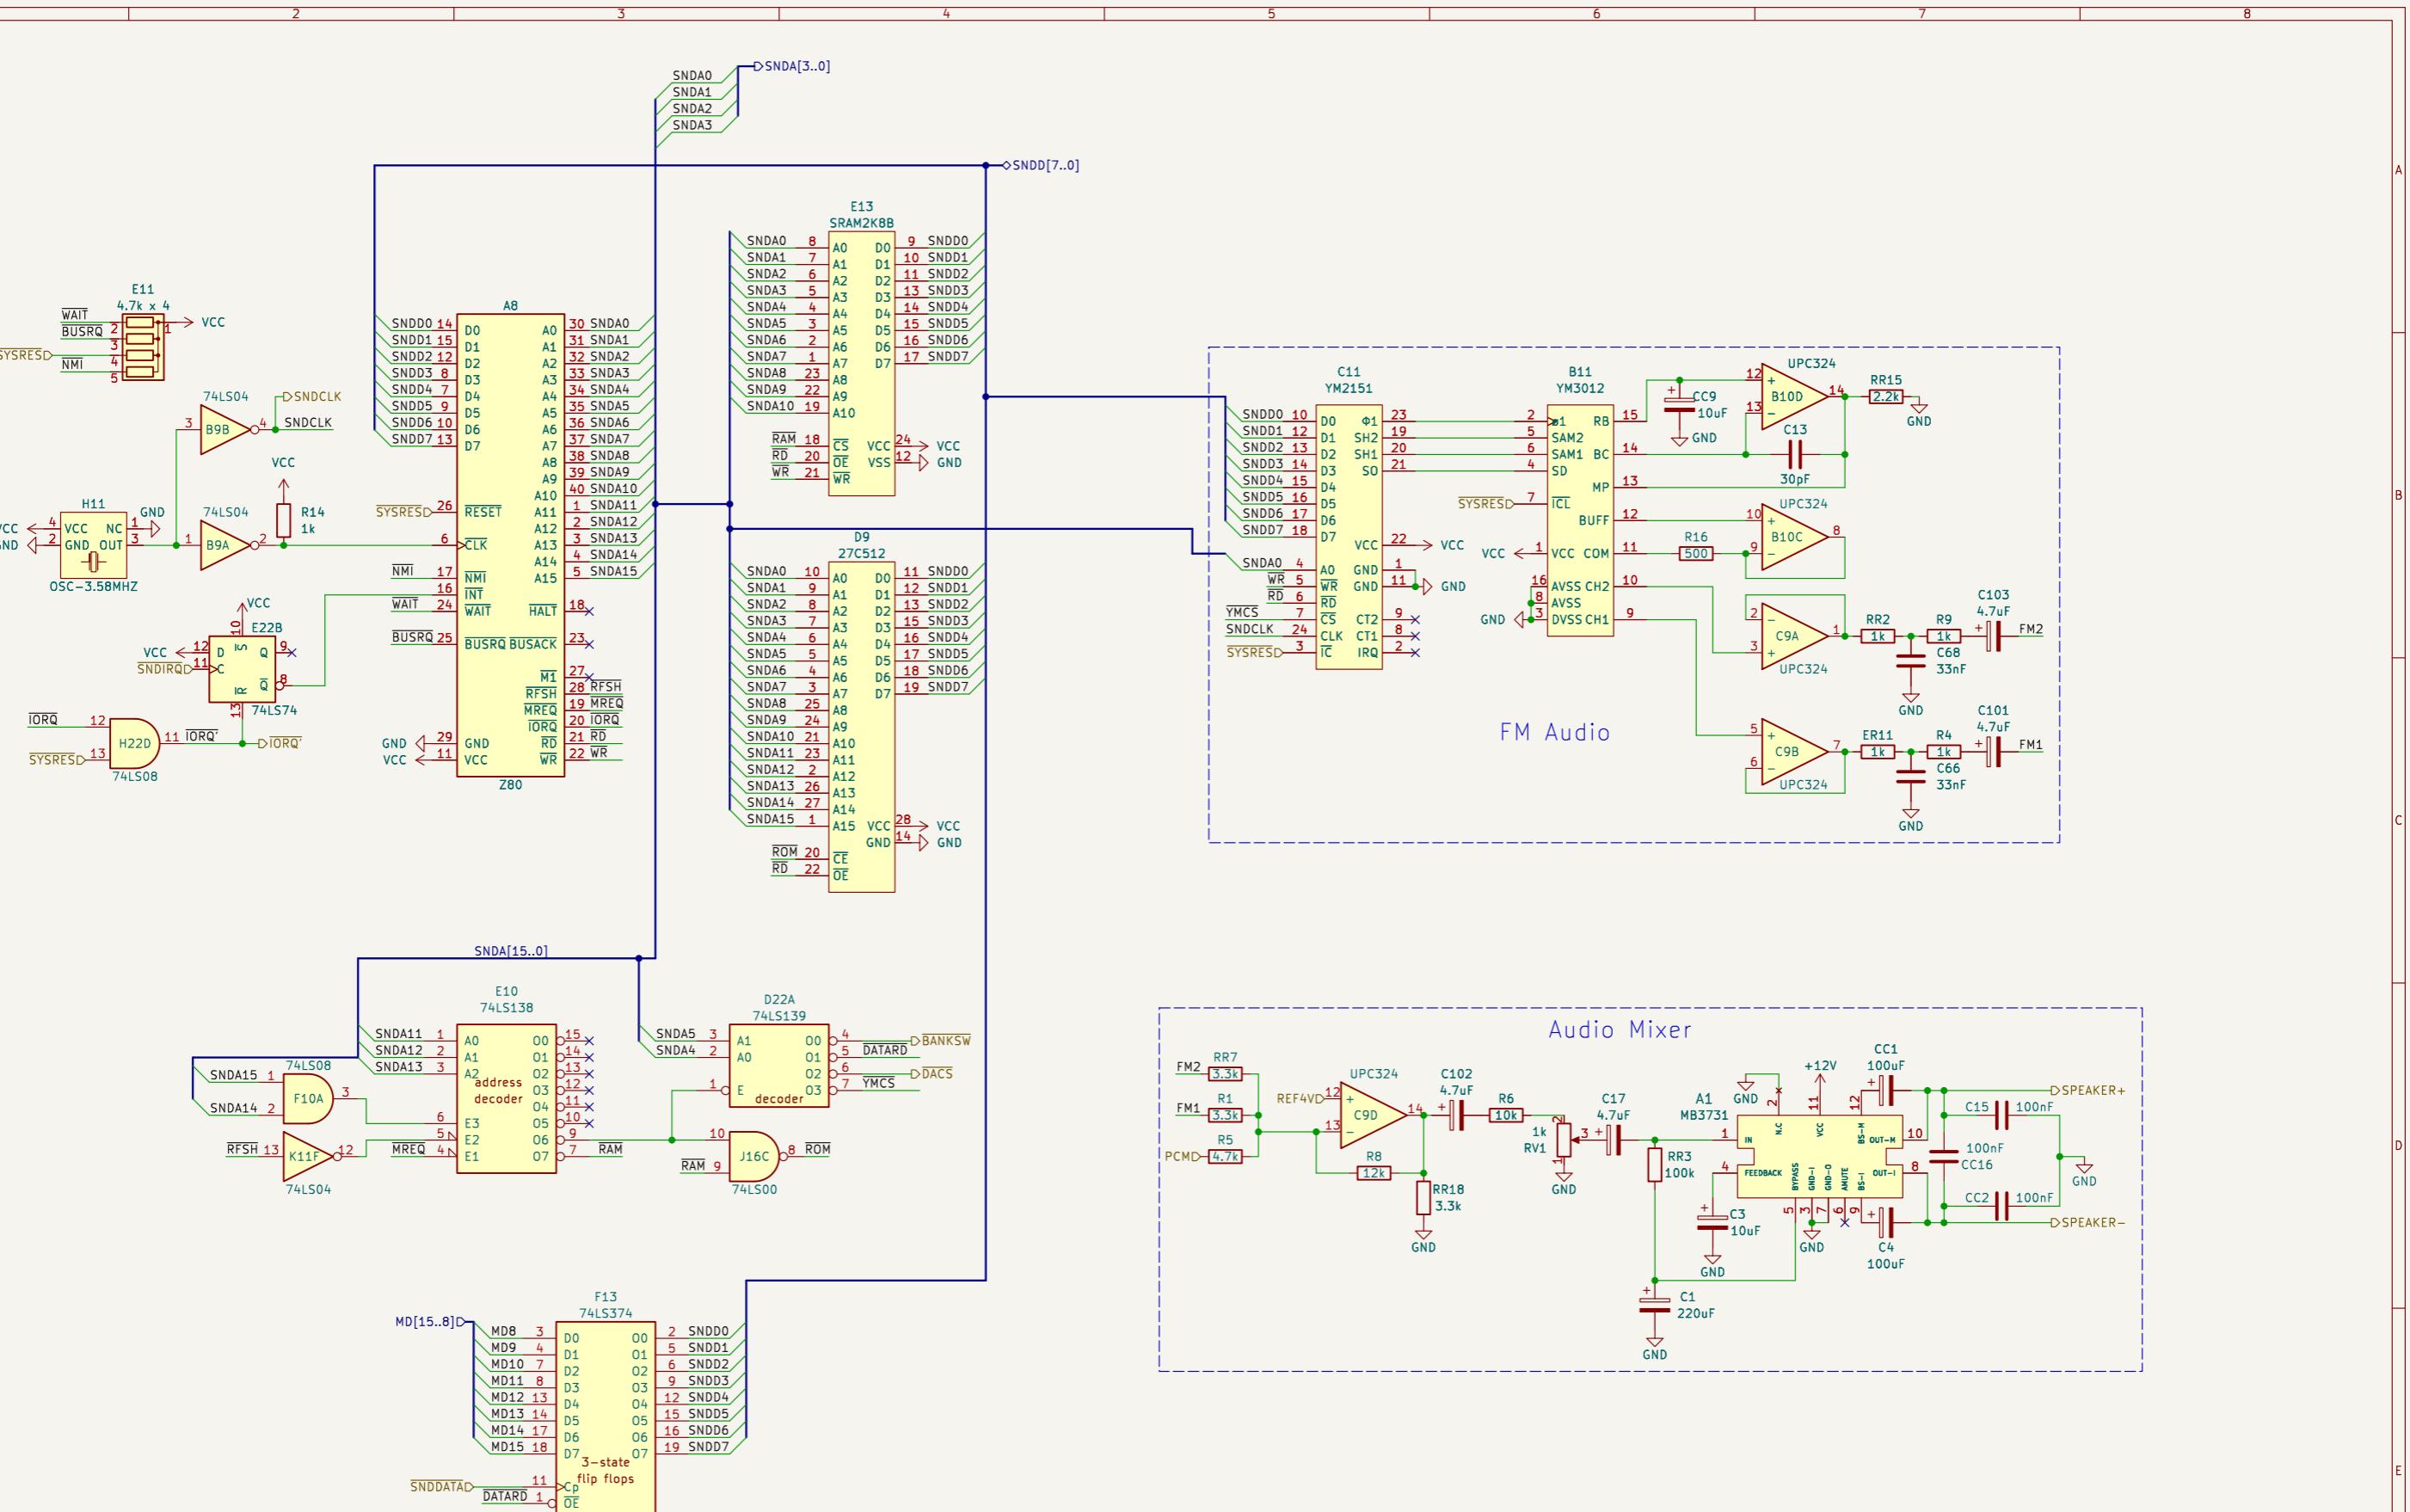

Ulf Skutnabba, twitter: @skutis77

Konami GX945

Sheet: /Sound/

File: sound.kicad_sch


Title: Gradius 3

Size: A3 Date: 2024-04-11

KiCad E.D.A. kicad-cl 7.0.10-7.0.10-ubuntu20.04.1

Rev: 9/12

B15 and B18 do not follow the standard Mask ROM behaviour.
The BYTE mode select must be selected from factory and pin 31 is probably not connected.

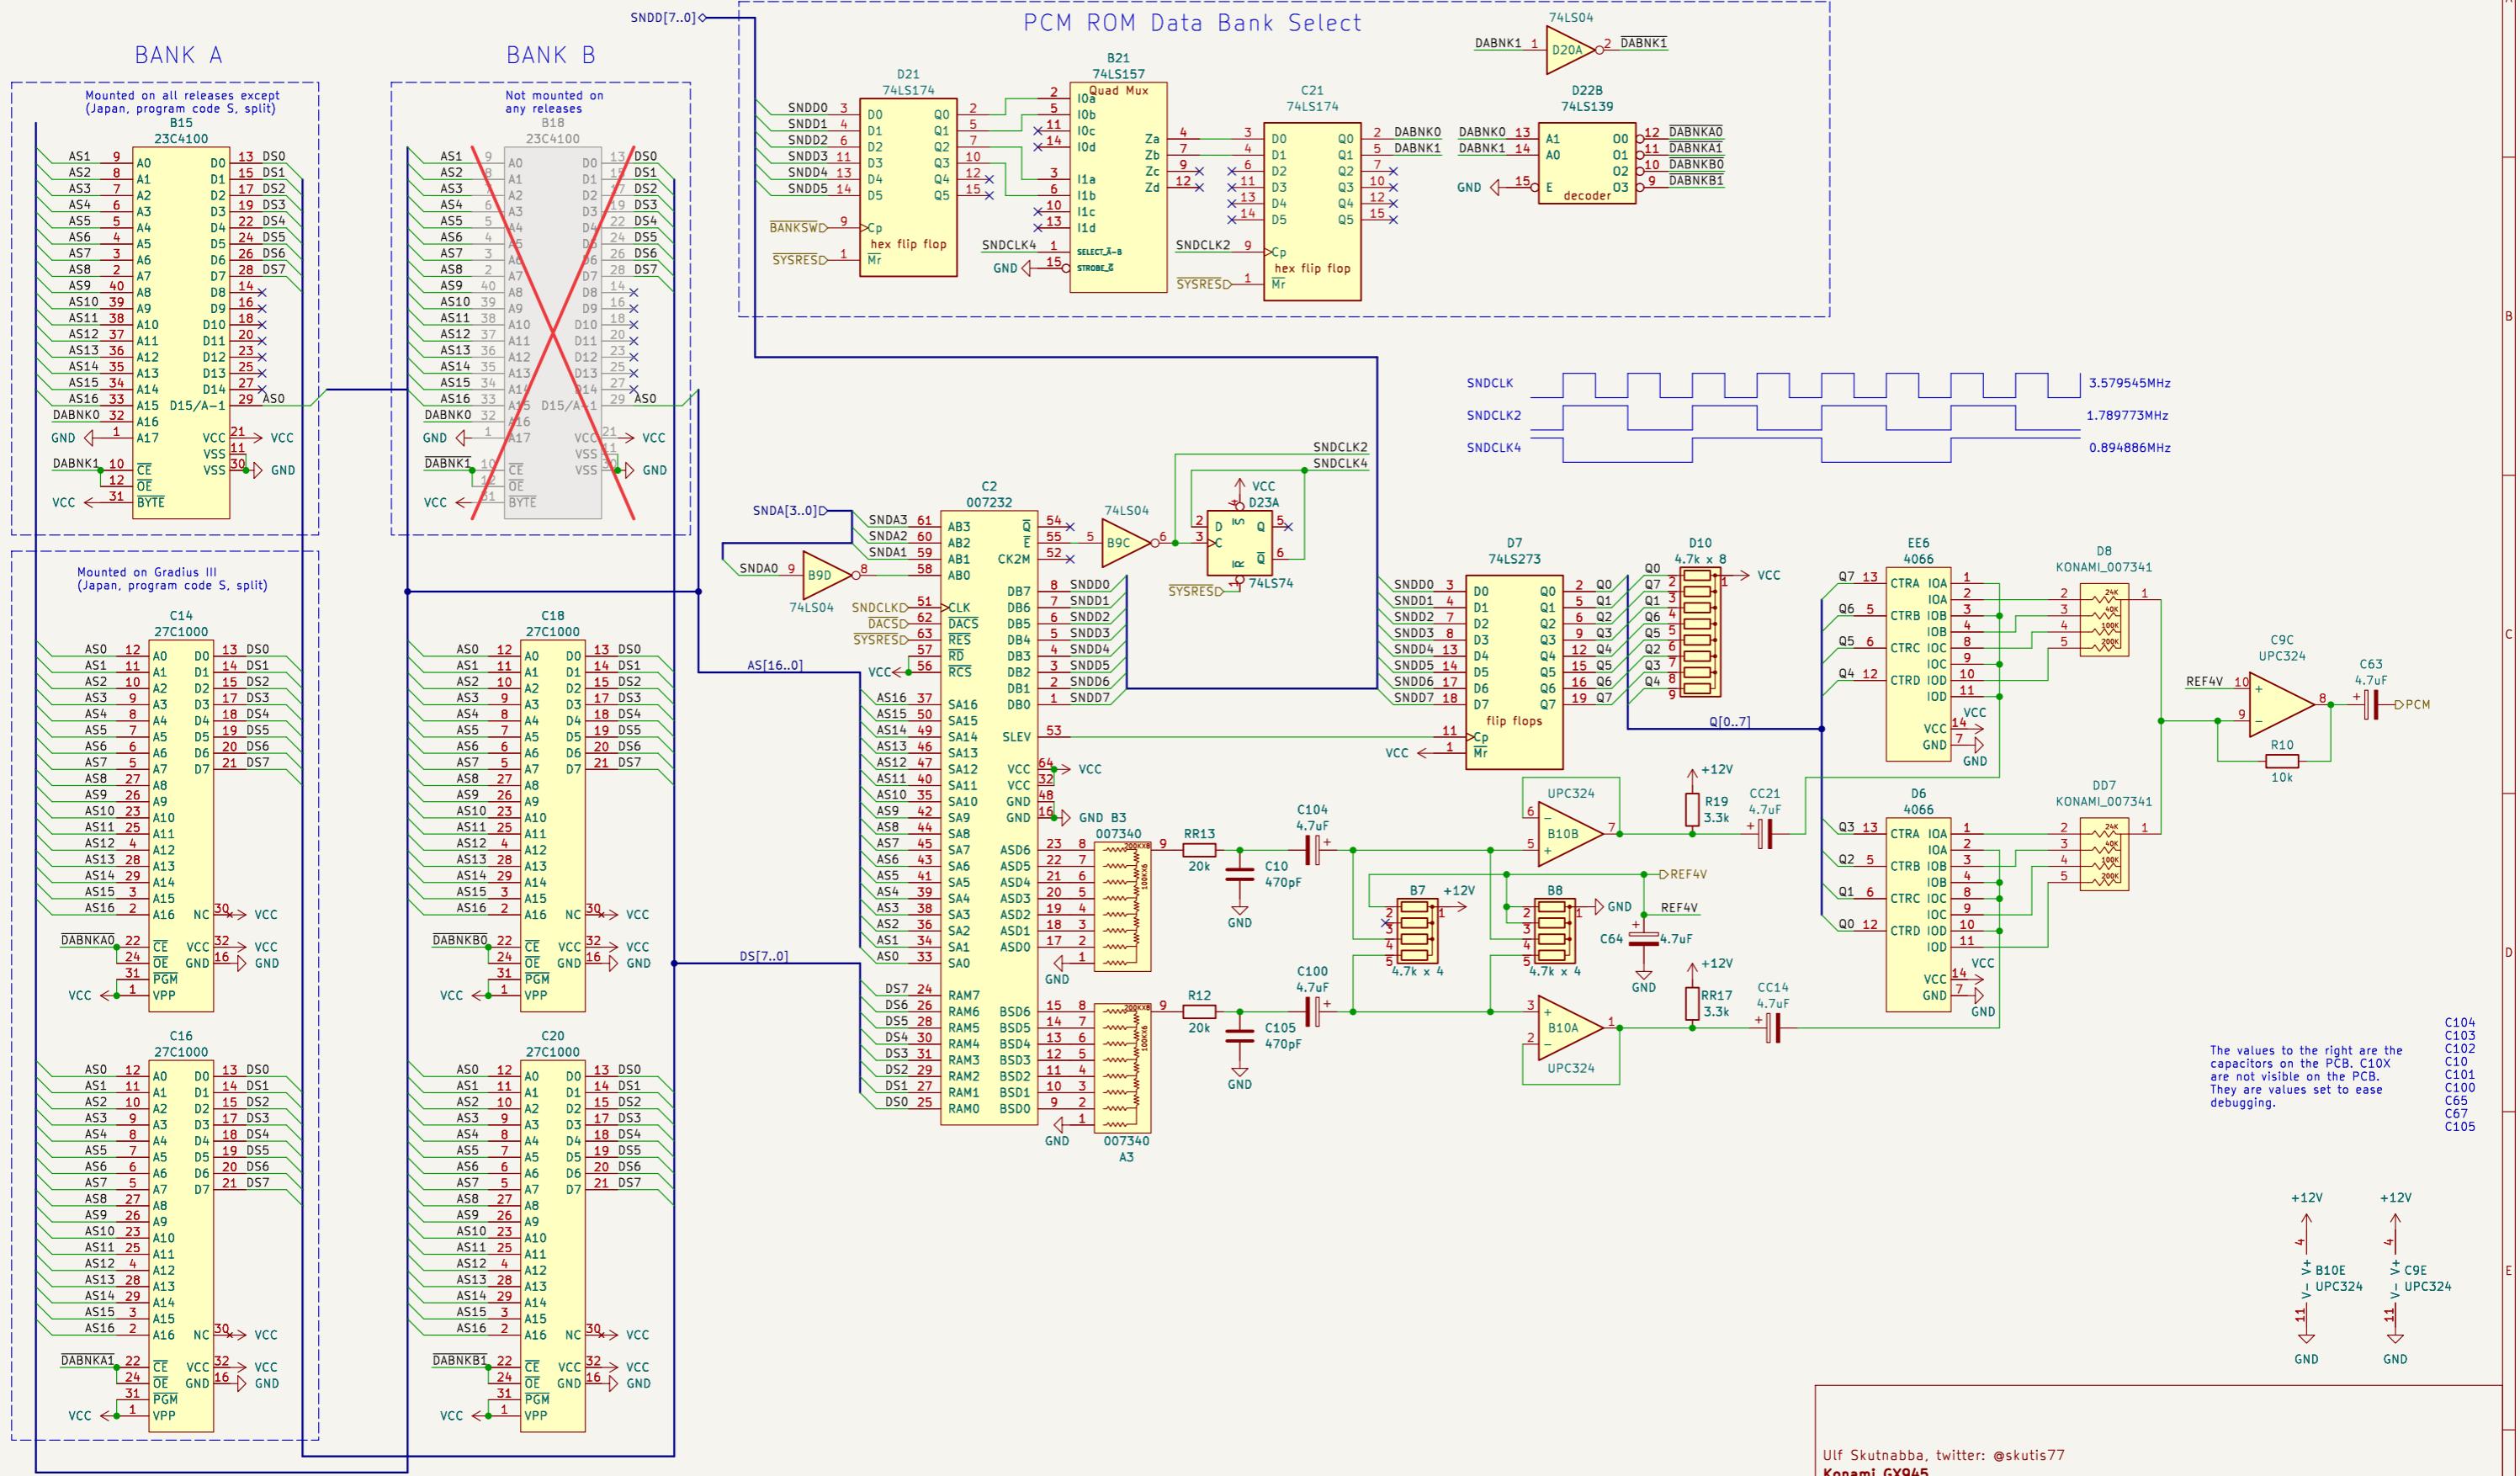

Ulf Skutnabba, twitter: @skutis77


Konami GX945

Sheet: /PCM/


File: pcm.kicad_sch

Title: Gradius 3

Size: A3 Date: 2024-04-11
KiCad E.D.A. kicad-cl 7.0.10-7.0.10-ubuntu20.04.1





C104
C103
C102
C101
C100
C65
C67
C105



Rev: Id: 10/12

A

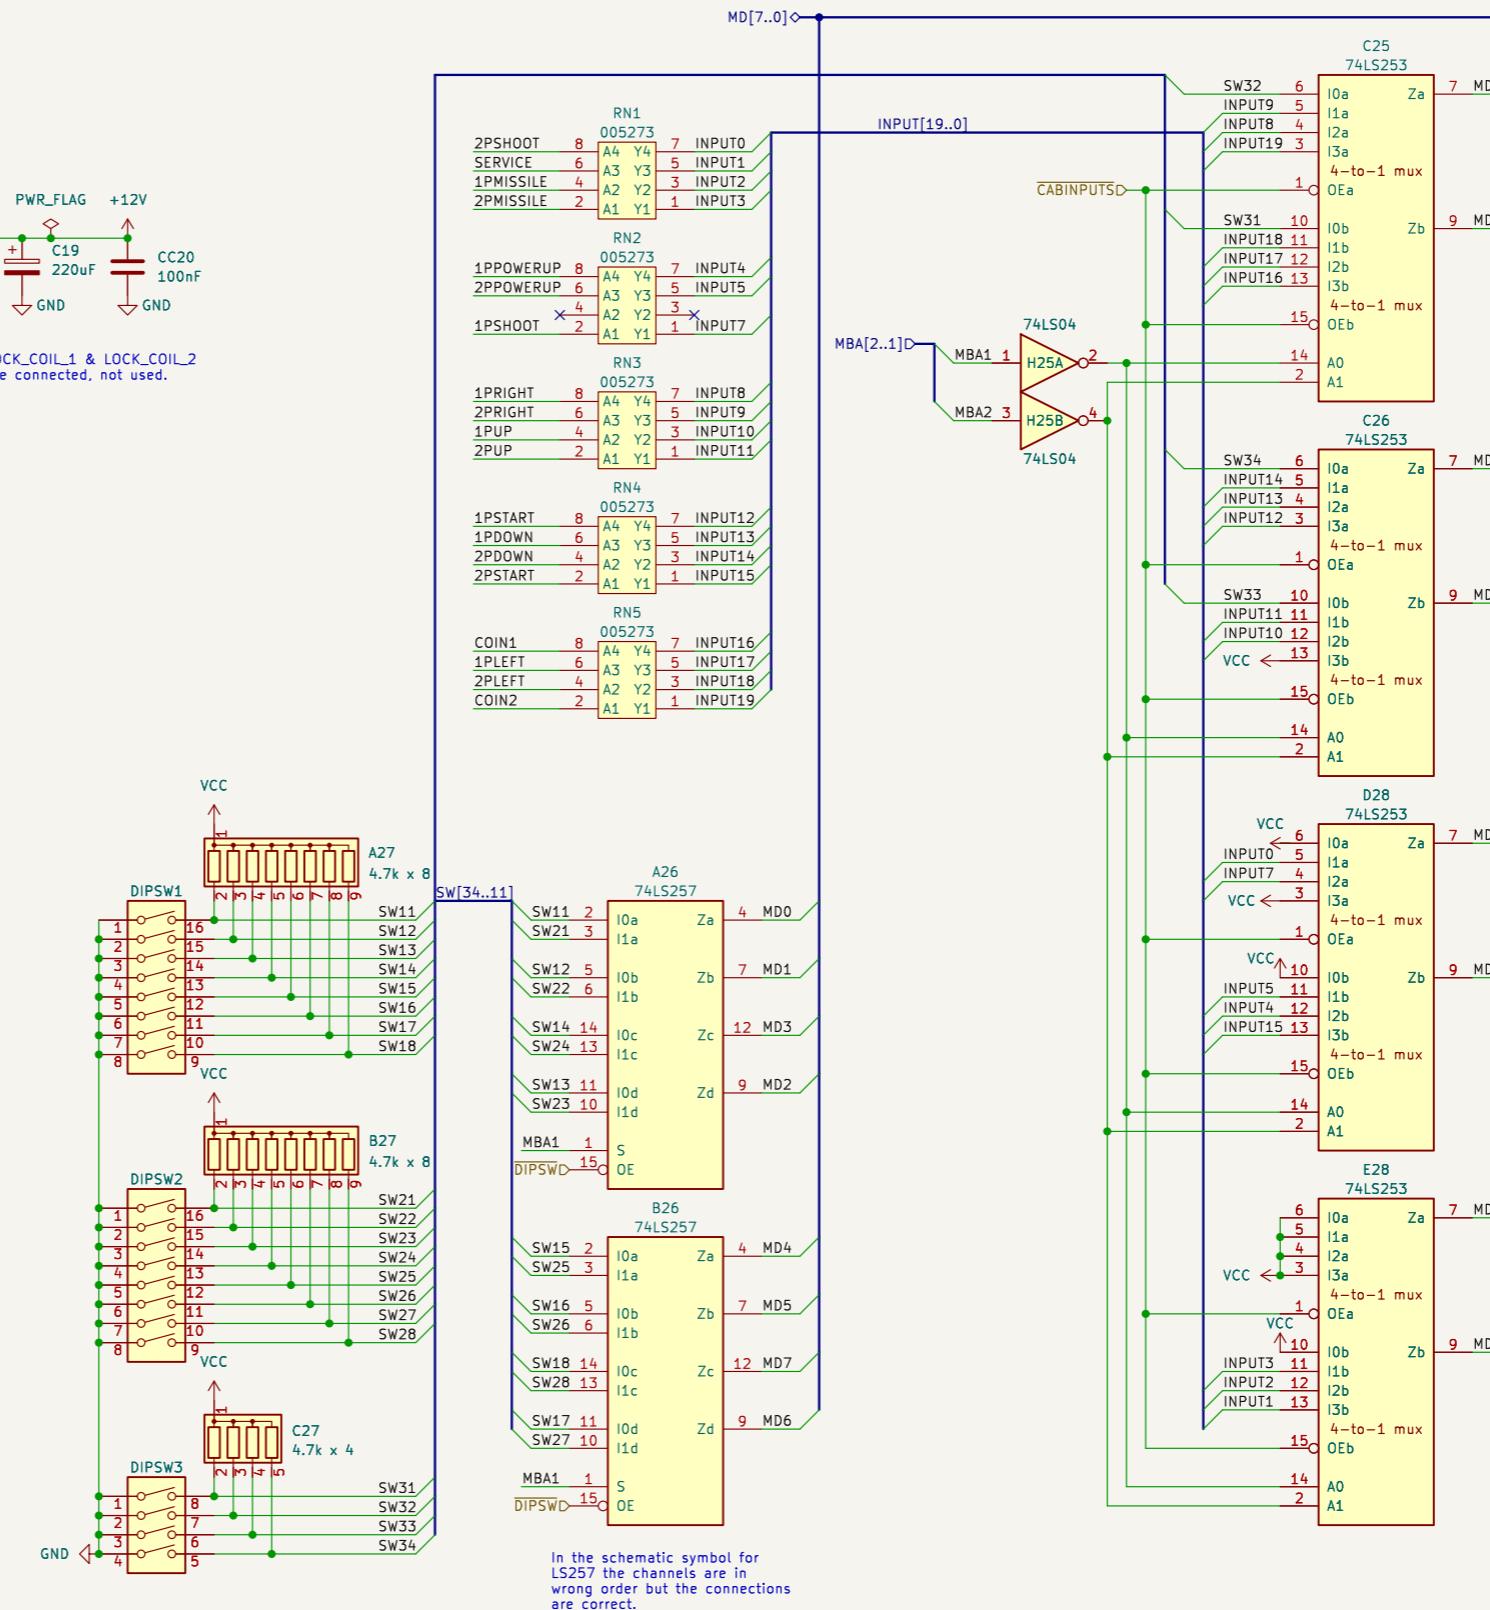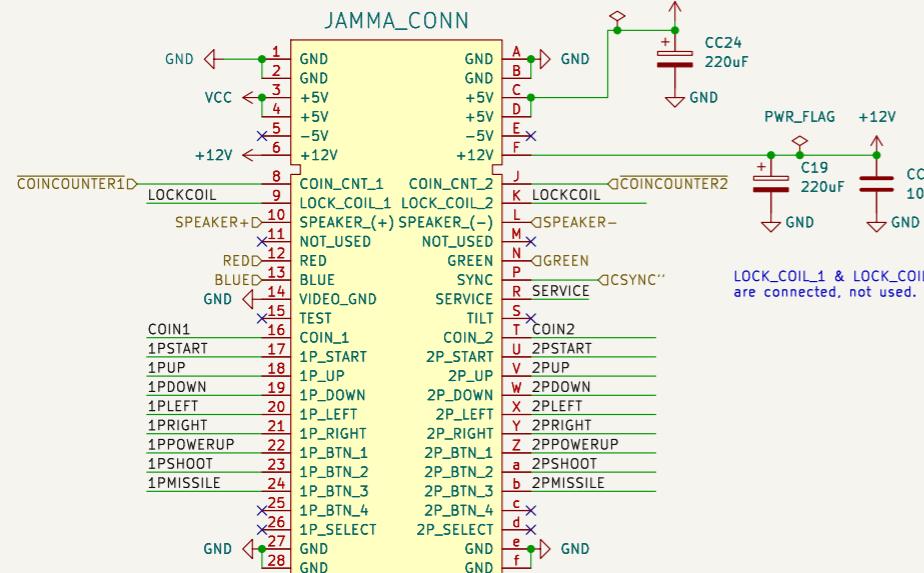

Ulf Skutnabba, twitter: @skutis77

Konami GX945

Sheet: /10/

File: io.kicad_sch


Title: Gradius 3

Size: A3 Date: 2024-04-11

KiCad E.D.A. kicad-cl 7.0.10-7.0.10-ubuntu20.04.1

Rev:

Id: 11/12

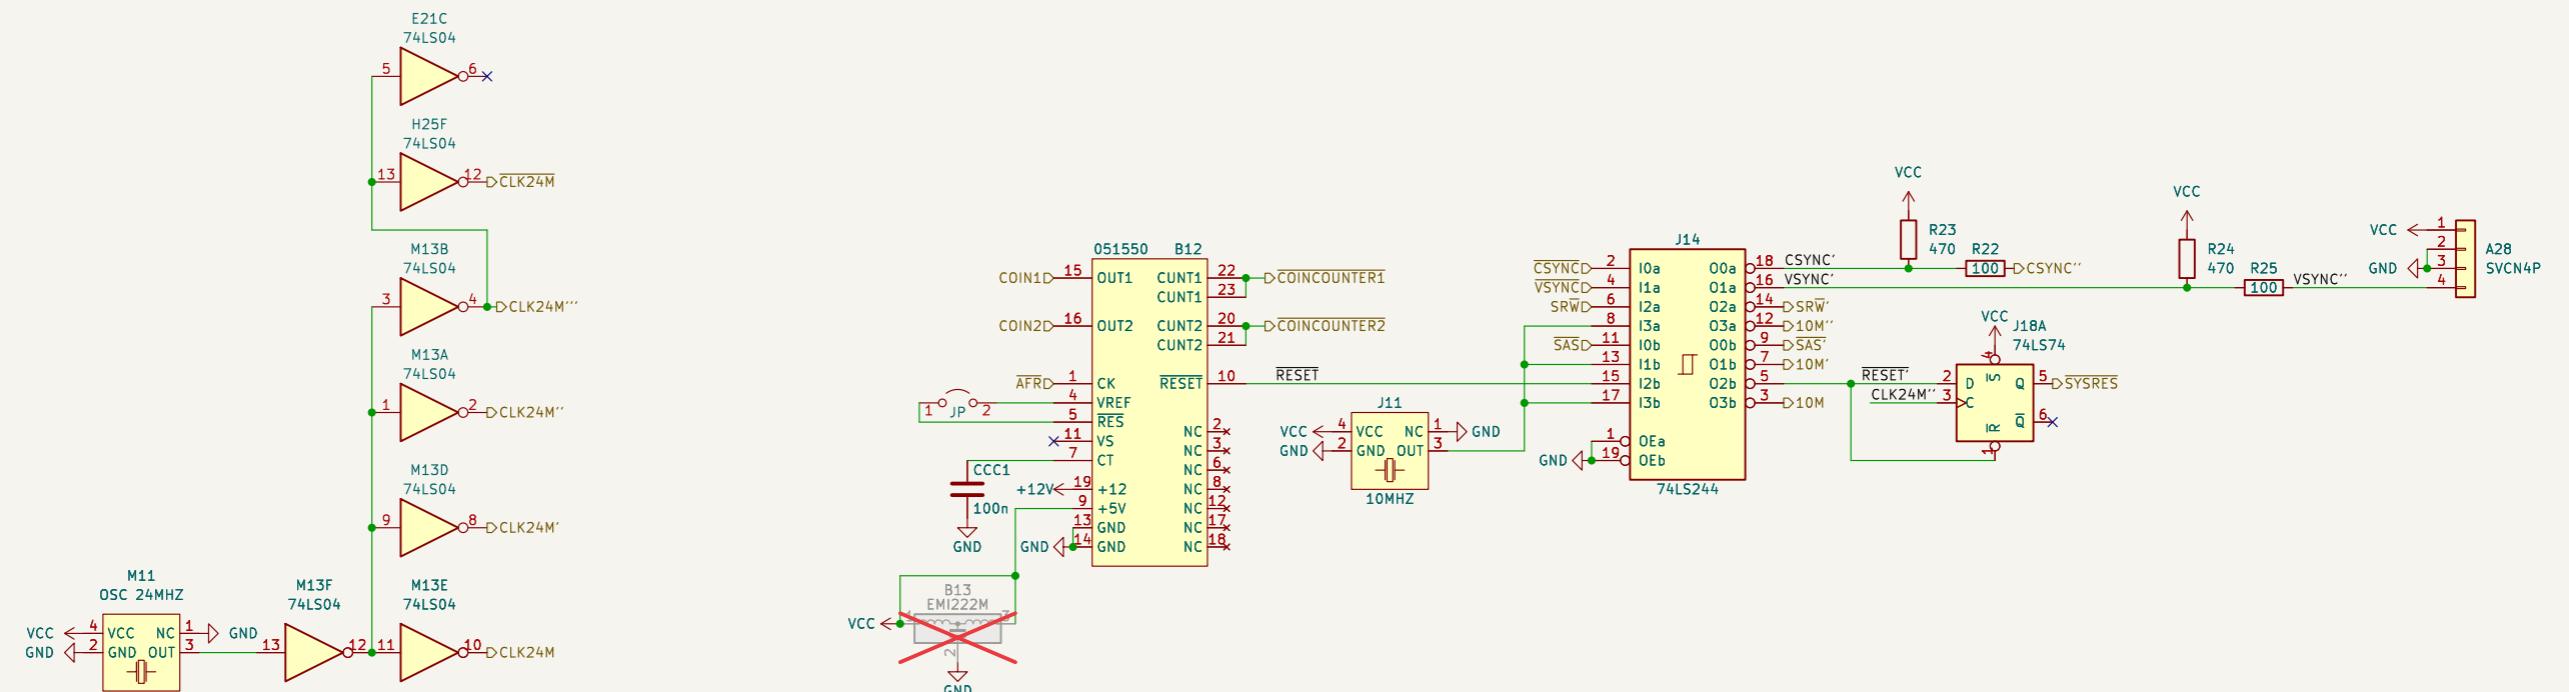


Horizontal and vertical synch timing diagrams

The pixel clock is derived from the 24MHz oscillator.
Pixel clock OVCK: $f = 24\text{MHz} / 4 = 6\text{MHz}$


The numbers in the HSYNC and HBL diagram are pixel clock cycles.
All edges are synchronised to the rising edge of the pixel clock.

The signals have been measured at the output of the
graphic chips.

If horizontal blanking is measured at the RGB DACs, the blanking
is delayed 2 pixel clocks relative to composite sync. This
gives BP = 14 and FP = 18.

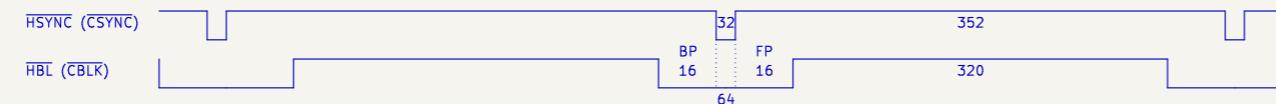

HSYNC and HBL
Frequency $f = 6\text{MHz} / 384 = 15.625\text{kHz}$.
Period $T = 1/f = 64\text{us}$.

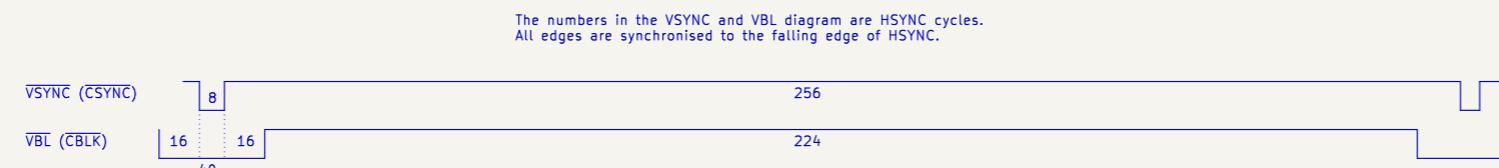

VSYNC and VBL:
Frequency $f = 15.625\text{kHz} / 264 = 59.1856\text{Hz}$
Period $T = 1/f = 1 / 59.1856\text{Hz} = 16.896\text{ms}$

Ulf Skutnabba, twitter: @skutis77

Konami GX945

Sheet: /Misc/

File: misc.kicad_sch

Title: Gradius 3

Size: A3 Date: 2024-04-11
KiCad E.D.A. kicad-cl 7.0.10-7.0.10-ubuntu20.04.1

Rev: Id: 12/12