
MADE SAiNT
Orthographic set

MS-TM01 · TRAIL MULE · PROTOTYPE 001 · REV A


SHEET 01 / 08

04 / POWDER BLUE · FOG GRID · US M 12 2E


LATERAL · TOE LEFT · LOGO TAB ON THE HEEL COLLAR

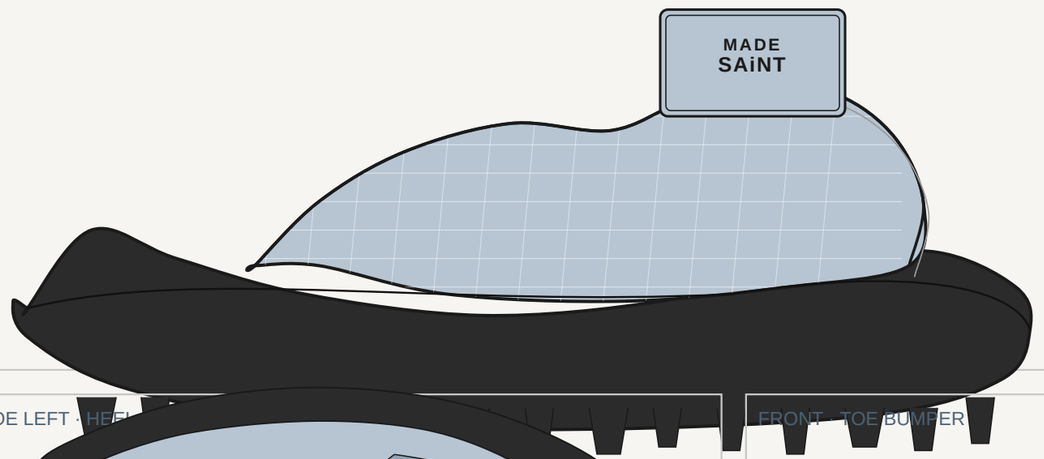


MEDIAL · SAME SILHOUETTE · NO CONFIRMED ASYMMETRY

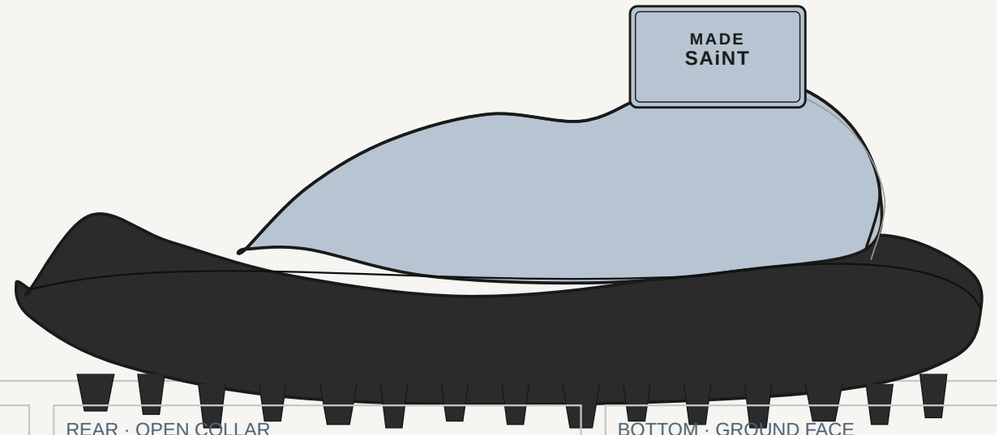


TOP · TOE LEFT · HEEL

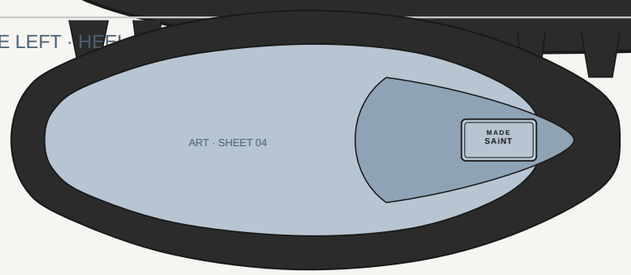


FRONT · TOE BUMPER

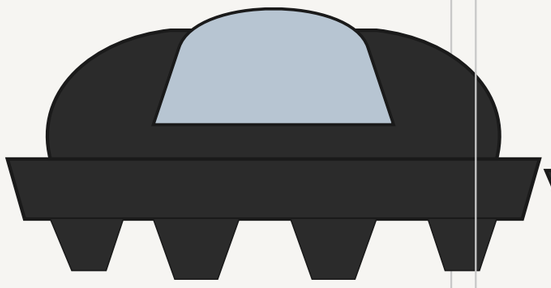

REAR · OPEN COLLAR

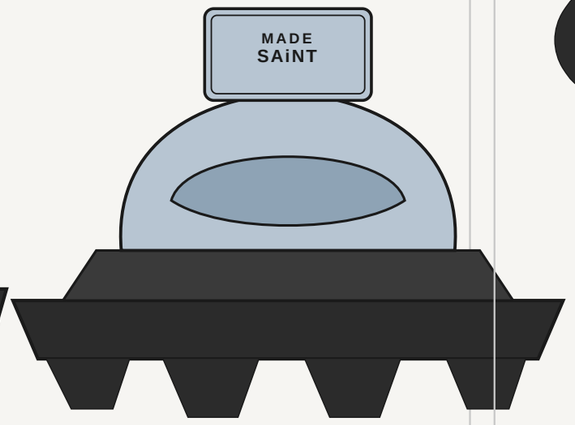

BOTTOM · GROUND FACE

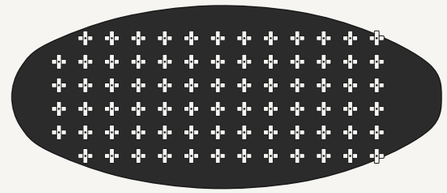


Callouts are visual, not dimensions: 1 rounded toe inside the bumper · 2 ripstop vamp, no confirmed center seam · 3 padded rolled collar · 4 heel logo tab, wordmark MADE / SAiNT · 5 wave sidewall · 6 plus-lug ground face · 7 open heel.

Reference card is the design authority. Lateral and medial are paired. Elastic gores from the memorandum are not drawn: they are not visible on the card.

SCALE NTS · PROPORTION MODEL FROM THE REFERENCE CARD · NOT A MEASURED DRAWING · PROVISIONAL — PHYSICAL VALIDATION REQUIRED

WORDMARK STAND-IN: MADE / SAiNT, LOWERCASE i REQUIRED. MATCH THE FOUNDER FILE. DO NOT CUT FROM THIS SHEET.

LATERAL CONSTRUCTION · BLACK = VISIBLE EDGE · GRAY = HIDDEN OR UNCONFIRMED

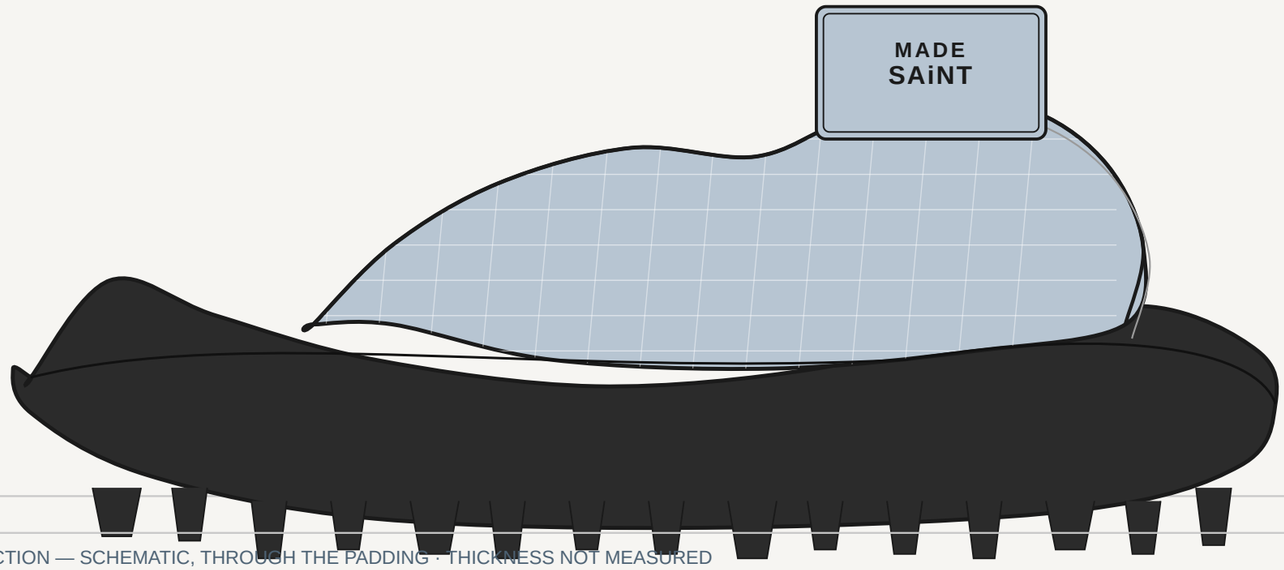

UPPER BUILD — OBSERVED VS ASSUMED

U1 Shell. Powder-blue grid ripstop.
Yardblox A033513 is the named listing.
Grid may not be in the plain listing.

U2 Collar. Same shell over foam.
Image: rolled, tonal, padded.
Navy tape is not on the card.

U3 Logo tab. Heel collar only.
Stitched border. Debossed wordmark.
Not a vamp tongue.


U4 Lining. Breathable textile.
Seen inside the opening. Spec open.

U5 Toe puff. Hidden. Memorandum.
Not a visible design line.

U6 Stabilizer. Memorandum. Test before fusing a 40 GSM shell.

No confirmed side seam. No center seam. A short back seam may sit under the logo tab. Unverified.

COLLAR SECTION — SCHEMATIC, THROUGH THE PADDING · THICKNESS NOT MEASURED

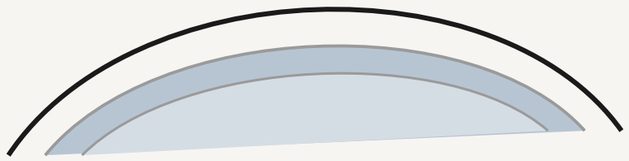

A outer ripstop, grid continues over the collar

B foam, memorandum 4–6 mm, not measured here

C lining, soft, powder-blue family

Edge is rolled and tonal on the card. Do not add a contrast binding.

Panel lines that are not visible on the card are omitted. Hidden reinforcements are marked as memorandum items.


SCALE NTS · PROPORTION MODEL FROM THE REFERENCE CARD · NOT A MEASURED DRAWING · PROVISIONAL — PHYSICAL VALIDATION REQUIRED

WORDMARK STAND-IN: MADE / SAiNT, LOWERCASE i REQUIRED. MATCH THE FOUNDER FILE. DO NOT CUT FROM THIS SHEET.


Outsole construction

04 / POWDER BLUE · FOG GRID · US M 12 2E

GROUND FACE · TOE

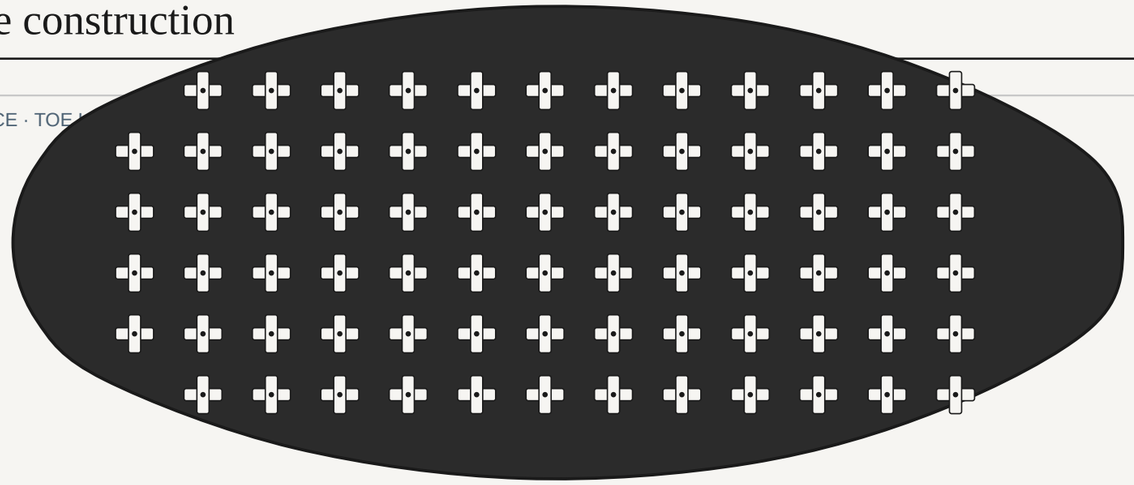

SIDEWALL PROFILE · WAVE AND TOE BUMPER

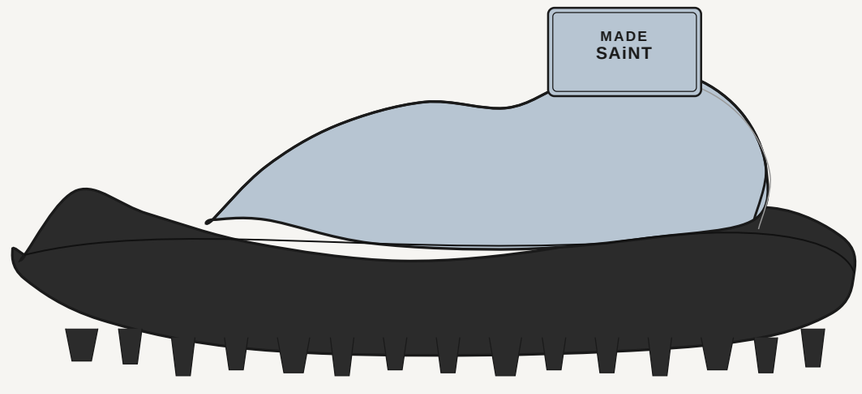

O1 One black rubber bottom is what the card shows: sidewall, toe bumper, and lug field read as one sculpted unit.

O2 A separate rand is not drawn. Add one only if the sourced sole does not already include the raised wall.

O3 Lug family on the card: plus-form, multi-directional, with a small center pip. This layout is a schematic, not a mold.

O4 Do not name or imply a commercial outsole brand. None has been selected.

O5 Bond surface is the cavity and the top of the wall. Its outline comes from the physical sole, not from this drawing.

O6 Sidewall top edge is a wave: higher at the toe bumper and the heel, lower through the waist.

O7 Toe bumper wraps the round toe. The textile toe sits behind the rubber, not in front of it.


Target: US M 12 2E compatible sole. A nominal size 12 sole is not assumed to fit a 2E last.

No manufacturer is specified. The plus lug is recorded as observed character so a sourced sole can be compared with the card.

SCALE NTS · PROPORTION MODEL FROM THE REFERENCE CARD · NOT A MEASURED DRAWING · PROVISIONAL — PHYSICAL VALIDATION REQUIRED

WORDMARK STAND-IN: MADE / SAiNT, LOWERCASE i REQUIRED. MATCH THE FOUNDER FILE. DO NOT CUT FROM THIS SHEET.

FOOTBED PLAN · TOE AT TOP · HEAD OF THE FIGURE TOWARD THE TOE

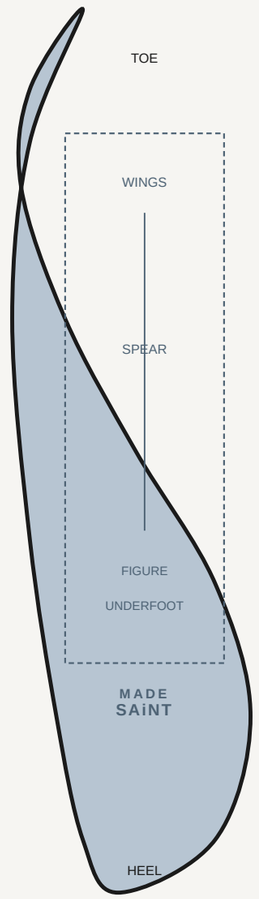

ARTWORK PLACEMENT — NOT PRODUCTION ART

Insert the supplied Saint Michael woodcut.

Do not redraw it from this sheet.

Orientation, locked to the card:

Head and wings toward the toe.

Spear runs along the footbed.

Figure underfoot toward the heel.

MADE SAiNT sits beneath the scene,

toward the heel. Lowercase i required.

Ink: slate, tonal on powder-blue

microfiber. It must stay legible.

STACK, TOP TO BOTTOM

F1 Microfiber topcover, powder blue.


F2 Print or transfer. Rub-test it.

F3 Cork-latex base, contoured,

removable. Source the contour.

This outline is the plan view only.

SECTION ACROSS THE FOREFOOT · SCHEMATIC

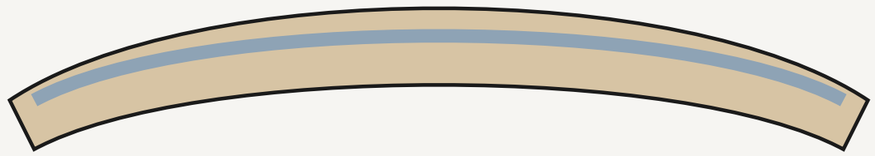

Cork-latex below. Microfiber skin above. Thicknesses not measured.

The dashed window is orientation only. Print from the supplied art file. Confirm the print survives rub and moisture before the pair is walked.


SCALE NTS · PROPORTION MODEL FROM THE REFERENCE CARD · NOT A MEASURED DRAWING · PROVISIONAL — PHYSICAL VALIDATION REQUIRED

WORDMARK STAND-IN: MADE / SAiNT, LOWERCASE i REQUIRED. MATCH THE FOUNDER FILE. DO NOT CUT FROM THIS SHEET.

MADE SAiNT
Exploded assembly

MS-TM01 · TRAIL MULE · PROTOTYPE 001 · REV A

04 / POWDER BLUE · FOG GRID · US M 12 2E

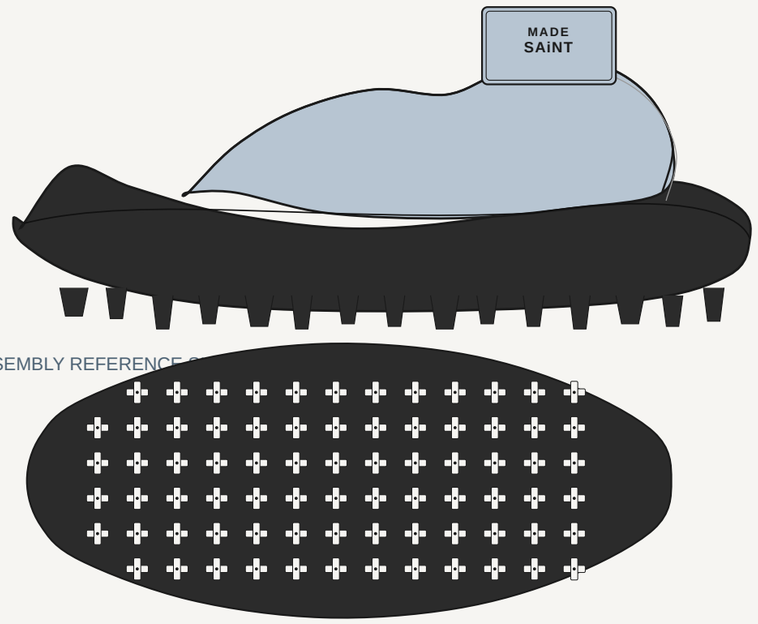

ASSEMBLY REFERENCE C

5 Logo tab

heel collar, stitched, not bonded into the sole

4 Upper shell + collar foam

ripstop over foam, rolled edge

3 Lining

inside the shell

2 Toe puff + stabilizer

hidden, memorandum

1 Insole board

only if the chosen sole needs one

0 Rubber bottom unit

sidewall, bumper, and lugs

Order is from the ground up. The footbed is removable and is not in the bond stack.

It is made and fitted after the upper will accept a last, and it must fit the real cavity.

No full heel counter is specified. The card holds its heel shape with collar padding.

If the handmade opening collapses, record that on revision 002 before adding a counter.


Footbed art is placed after the topcover is laminated. See sheet 04 for orientation.

Component numbers match the bill of materials. The footbed (F1–F3) is a separate removable assembly.

SCALE NTS · PROPORTION MODEL FROM THE REFERENCE CARD · NOT A MEASURED DRAWING · PROVISIONAL — PHYSICAL VALIDATION REQUIRED

WORDMARK STAND-IN: MADE / SAiNT, LOWERCASE i REQUIRED. MATCH THE FOUNDER FILE. DO NOT CUT FROM THIS SHEET.

GRAY DASH = 8-UNIT MOCK-UP ALLOWANCE, AN ASSUMPTION. SLATE = STITCH GUIDE 3 UNITS INSIDE THE NET. NEITHER IS A MEASURED SPEC.

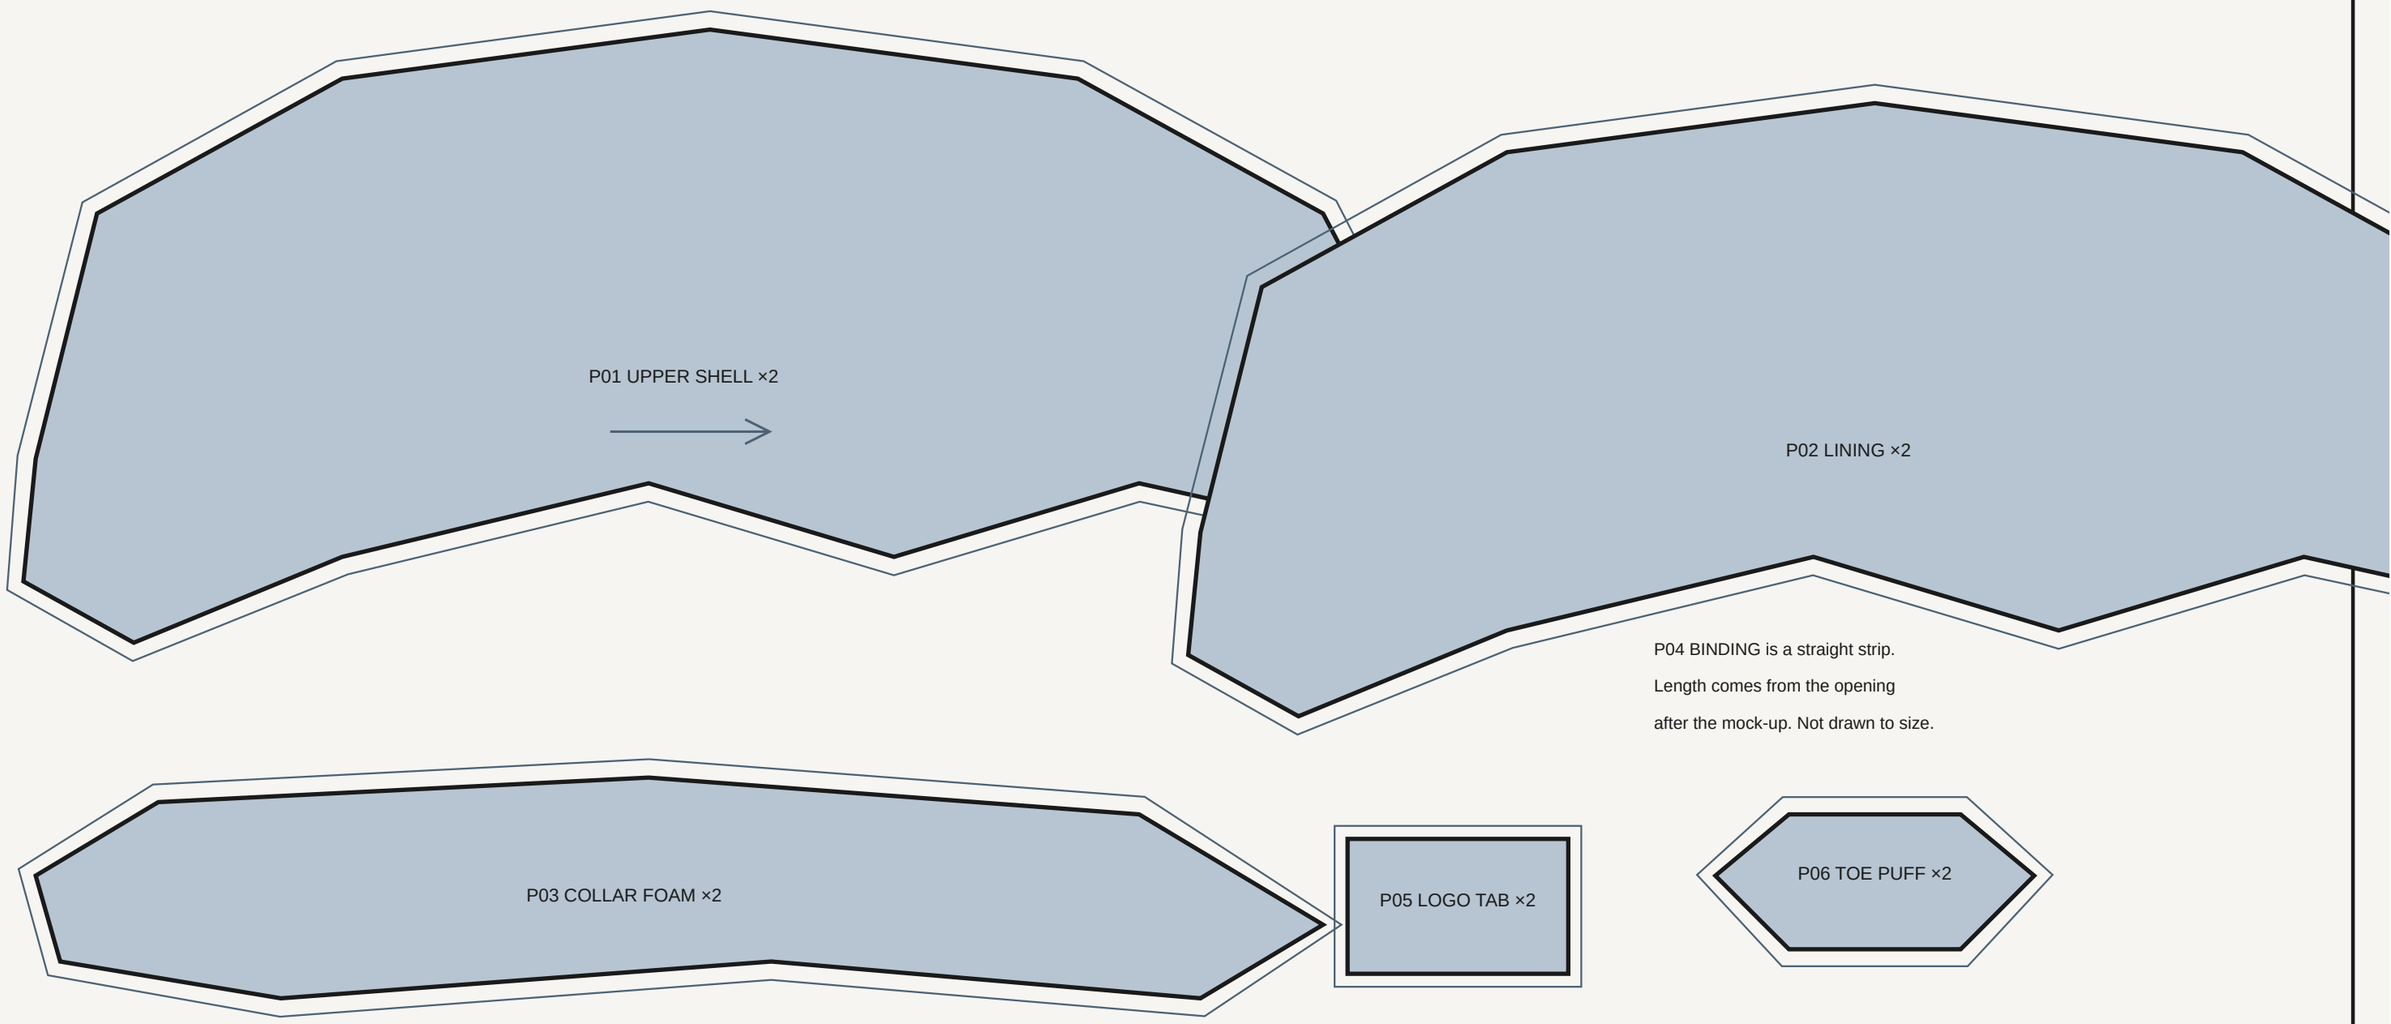

P04 BINDING is a straight strip.
Length comes from the opening
after the mock-up. Not drawn to size.

These nets are proportion studies of the visible surfaces. They are not last-flattened patterns. Trace the real last before any hide is cut.

Grain arrow is the intended heel-to-toe direction of the shell. Confirm warp on the Yardblox swatch. Grid alignment is visual.

WORDMARK STAND-IN: MADE / SAiNT, LOWERCASE i REQUIRED. MATCH THE FOUNDER FILE. DO NOT CUT FROM THIS SHEET.

ID COMPONENT MATERIAL COLOR SUPPLIER

U1 Upper shell Yardblox A033513 Powder blue Yardblox — confirm listing
DWR stretch crinkle ripstop, 92/8, 40 GSM · 1 yard buy · Grid may be absent on the plain listing

U2 Stabilizer Sew-in tricot or nonwoven Neutral UNASSIGNED
Bond-test before any fuse · 0.5 yard buy · 40 GSM shell needs a test

U3 Toe puff Flexible footwear puff Neutral UNASSIGNED
Hidden · 1 sheet · Memorandum item

U4 Lining Breathable textile Powder family UNASSIGNED
Inside the opening · 0.5 yard buy · Exact cloth not on the card

U5 Collar foam Soft footwear foam Neutral UNASSIGNED
4–6 mm named in the memo · 1 sheet · Thickness not measured

U6 Logo tab Coated textile or synthetic Powder blue UNASSIGNED
Stitched, debossed wordmark · 2 · Heel collar, not a tongue

U7 Thread Bonded polyester Slate / powder UNASSIGNED
Tone-on-tone · 1 set · Needle and stitch length by test

F1 Footbed base Cork-latex, contoured Natural UNASSIGNED
Removable, size 12 2E cavity · 1 pair · Fit the real cavity

F2 Topcover Microfiber Powder blue UNASSIGNED
Powder blue · 0.25 yard · Laminate before art

F3 Artwork Supplied woodcut file Slate Founder file
Slate ink, abrasion test · 2 + tests · Do not redraw

O1 Rubber bottom Black rubber, lugged Black UNASSIGNED
Wide wall and toe bumper · 1 pair · No brand selected

A1 Adhesive Flexible footwear contact — UNASSIGNED
Match rubber and textile · Small · Follow the can and ventilate

B1 Insole board Footwear board Neutral UNASSIGNED
Only if the sole requires it · 1 sheet · Omit if the sole is a closed cup

Buy allowances are from the 19 Oct 2026 memorandum. They are not yields. The CSV is the editable bill.

Suppliers other than the named Yardblox listing are unassigned. Do not infer a vendor from a similar product.

Prototype sequence

04 / POWDER BLUE · FOG GRID · US M 12 2E

A Verify

Swatch the ripstop. Confirm powder blue and whether the white grid is actually in the cloth. Identify a US M 12 2E last and a black sole with a raised wall and a round toe bumper. Do not cut yet.

B Trace

Tape the last. Trace the feather, the opening, and the sole cavity. Rebuild sheets 02 and 06 on that trace. Retire this proportion model.

C Mock

Paper or cheap-cloth upper. Check the open heel, the collar height, and the logo-tab position against the card.

D Upper

Stabilize only after a bond test. Sew the shell, foam, and lining. Roll the collar in the shell cloth. Stitch the logo tab on the heel collar. Deboss or stamp from the wordmark file.

E Footbed

Fit cork to the cavity. Laminate microfiber. Place the supplied art head-to-toe, wordmark toward the heel. Rub-test a spare.

F Bottom

Rough and cement per the adhesive sheet. Wipe squeeze-out. Do not add a separate rand if the sole already has the wall.

G Check

Forefoot clearance, heel retention, level sole, no early separation, collar comfort, art still readable. Record changes as revision 002.