BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023

ANTIMICROBIAL TECHNOLOGY

SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / Filtration

SYSTEM PARAMETERS

CATALYTIC CARBON
Reduces Chloramine and Chlorine

NH_2Cl TARGETED CONTAMINANT
CHLORAMINE

Cl TARGETED CONTAMINANT
CHLORINE



PRODUCT FEATURES

- Reduces chlorine and chloramine levels along with other offensive taste and odors in your entire household water supply
- Filters all household water at the point of entry
- Reduces impurities in the steam and water in showers and baths
- Provides high-capacity flow for reliable access to high-quality water
- Customized to your individual needs, including household size and plumbing
- Designed for easy installation, use and maintenance
- Environmentally friendly with landfill-safe certified filtration media
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 42**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 61**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 372**
- Made in an IAPMO-certified manufacturing plant

10 YEAR WARRANTY
CONTROL VALVE

Limited Lifetime WARRANTY Excellent Quality
PRESSURE TANK

IAPMO R&T C ®

MADE IN USA

The BRITA I PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / Filtration

SYSTEM PARAMETERS

CATALYTIC CARBON
Reduces Chloramines and Chlorine

Programming & Control

- Fully customizable programming (times and cycle order)
- Program time of day and hardness
- Days override feature
- Optional Air Release Cycle
- External accessory option
- Stores system configuration and operation data in nonvolatile memory
- Valve internally ported in 1 inch


Display & Interface

- Digital display screen
- Water drop flow indicator
- Color-specific displays
- Scrolling Text Display
- Programmable contractor contact screen

Memory & Alerts

- Low battery warning
- Battery back-up with up to 8 hrs of power carry-over
- Service Call Reminder (not programmed from factory)
- Easy contractor set-up

System Dimensions

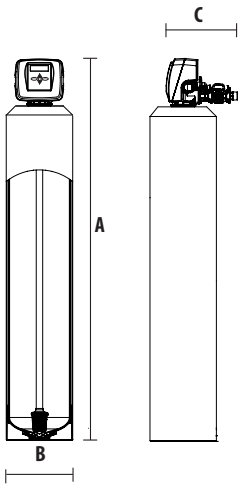

System Specifications

Part Number	BPCAT75J	BPCAT100J	BPCAT150J	BPCAT200
Media	Cat Hac Carbon	Cat Hac Carbon	Cat Hac Carbon	Cat Hac Carbon
Media Quantity (FT3)	3/4	1	1 1/2	2
Mineral Tank (in)	8 x 44	10 x 44	10 x 54	12 x 52
Tank Jacket	Yes	Yes	Yes	No
Media Loaded	Yes	Yes	Yes	No
Secondary Media	Gravel	Gravel	Gravel	Gravel
Secondary Media Qty (lb)	8	9	10	12
Additional Media	N/A	N/A	N/A	N/A
Additional Media Amt (lb)	N/A	N/A	N/A	N/A
Service Flow Rate	5	5	7	10
Pipe Size (in)	1	1	1	1
Min-Max Pressure (psi)	20 - 100	20 - 100	20 - 100	20 - 100
Min-Max Temperature (^{0}F)	35 - 100	35 - 100	35 - 100	35 - 100
Backwash gpm	4.2	6.5	6.5	10
Plumbing Connections	1 inch Male NPT elbow	1 inch Male NPT elbow	1 inch Male NPT elbow	1 inch Male NPT elbow
Bypass	Yes	Yes	Yes	Yes
A measurement	51 in	51 in	61 in	59 in
B measurement	10 in	10 in	12 in	12 in
C measurement	16.5 in	16.5 in	18.5 in	18.5 in

BRITA | PRO