BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023

ANTIMICROBIAL TECHNOLOGY

SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / Filtration

SYSTEM PARAMETERS

NITRATE
Reduces Home Nitrates

NO_3 TARGETED CONTAMINANT
NITRATES



PRODUCT FEATURES

- Offers breakthrough flow rates, treatment efficiency and ease of installation / maintenance for whole-home nitrate removal
- Ideal for families in agricultural areas
- Filters all household water at the point of entry
- Allows automatic regeneration of the filter
- Has automatic bypass that diverts untreated water during regeneration
- Uses nitrate selective resin that is unaffected by sulfate ion and will not allow nitrate dumping
- Keeps residue from impurities off your family's clothes, bed linens and dishes
- Eliminates impurities in the steam and water in showers and baths
- Provides high-capacity flow for reliable access to high-quality water
- Customized to your individual needs, including household size and plumbing
- Designed for easy installation, use and maintenance
- Environmentally friendly with landfill-safe certified filtration media
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 53**
- System-level certified by IAPMO R&T to **ASSE LEC 2008**
- System-level certified by IAPMO R&T to **NSF/ANSI/CAN 372**
- Made in an IAPMO-certified manufacturing plant

10 YEAR WARRANTY
CONTROL VALVE

Limited Lifetime WARRANTY Excellent Quality
PRESSURE TANK

LEAD FREE
UPC ®

MADE IN USA

The BRITA | PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / Filtration

SYSTEM PARAMETERS

NITRATE

Reduces Home Nitrates

Programming & Control

- Fully customizable programming (times and cycle order)
- Program time of day and hardness
- Days override feature
- Optional Air Release Cycle
- External accessory option
- Stores system configuration and operation data in nonvolatile memory
- Valve internally ported in 1 inch


Display & Interface

- Digital display screen
- Water drop flow indicator
- Color-specific displays
- Scrolling Text Display
- Programmable contractor contact screen

Memory & Alerts

- Low battery warning
- Battery back-up with up to 8 hrs of power carry-over
- Service Call Reminder (not programmed from factory)
- Easy contractor set-up

System Dimensions

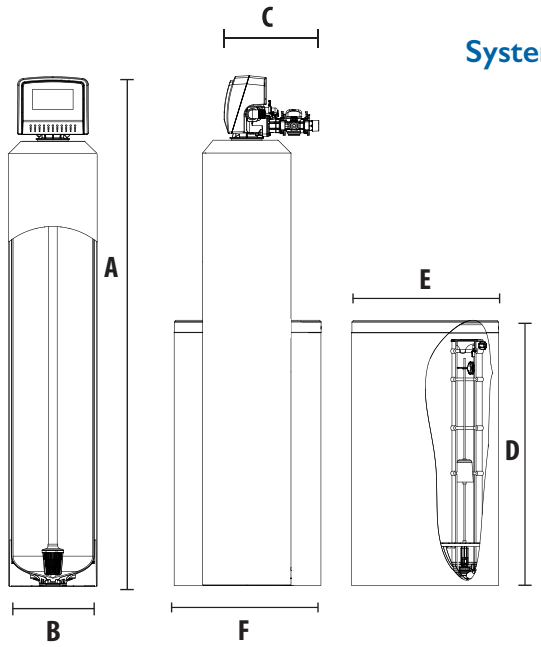

System Specifications

Part Number	BP150NJ
Salt used - per regeneration (lb.)	15
Regeneration Programming	Pre-Fill Brine
Grains Capacity	15,300
Resin Quantity (FT3)	1.5
Secondary Media	Cat Hac Carbon
Secondary Media Quantity (FT3)	1
Additional Media	N/A
Additional Media Amount (lb.)	N/A
Mineral Tank (in)	10 x 54
Tank Jacket	YES
Media Loaded	YES
Brine Tank size (in)	15 x 36
Salt Storage Capacity	275
A measurement	54 in
B measurement	10 in
C measurement	16.5 in
D measurement	36 in
E measurement	15 in
F measurement	17 in

BRITA | PRO