BRITA | PRO

Brita PRO by Protect Plus LLC
420 3rd Avenue NW • Hickory, NC 28601 • (866) 985-2900
www.britapro.com
Technical Support Hotline: (828) 449-2023



SYSTEM TYPE

Whole House

CATEGORY

Platinum Series / Softener

CHLORINE

SYSTEM PARAMETERS

Softener + Carbon Filtration
MIXED BED

CHLORAMINE

PRODUCT FEATURES

- Softens water and reduces chlorine and chloramine
- Our most advanced programmable valve head
- Intuitive profile - learns softening capacity based on usage profile
- Metered regeneration for efficiency and improved water quality
- Fully adjustable regeneration cycle and plated tank technology reduces salt and water usage
- One regeneration cycle cleans the filter and softener simultaneously conserving waste water
- Stores all of the system configurations and operating data even in the event of a power outage
- Additional connection fittings available (includes 90-degree elbow connectors)
- Provides high-capacity flow for reliable access to high-quality water
- Customized to your individual needs, including household size and plumbing
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 42**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 44**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 61**
- System-level certified by IAPMO R&T to **NSF/ANSI Standard 372**
- Made in an IAPMO-certified manufacturing plant

5 YEAR WARRANTY
CONTROL VALVE

Limited Lifetime WARRANTY Excellent Quality
PRESSURE TANK

IAPMO R&T

MADE IN USA

The BRITA | PRO ® trademark and logo are registered trademarks of Brita LP and are used under license by Protect Plus, LLC. All rights

PRODUCT SPECIFICATIONS

SYSTEM TYPE Whole House

CATEGORY Platinum Series / Softener

SYSTEM PARAMETERS

Softener + Carbon Filtration
MIXED BED

Programming & Control

- Fully customizable programming (including times and cycle order)
- Easy contractor set-up
- Program time of day and hardness
- Days override feature (1-28 days)
- Service Technician “Step-Through” Regeneration
- Multiple regenerations per day
- Treated water brine refill
- Factory-set pre-fill brine
- Optional Air Release Cycle

Display & Diagnostics

- Digital display screen
- Color-specific displays
- Scrolling Text Display
- Water drop flow indicator
- Programmable contractor contact screen
- 62-day diagnostic information:
  - > Flow rates
  - > Gallons since regeneration
  - > Days since regeneration
  - > Total regenerations since startup
  - > Peak flow rates
  - > Days until next regeneration


Memory & Alerts

- Low battery warning
- Battery back-up with up to 8 hrs of power carry-over
- Stores system configuration & operation data in nonvolatile memory
- Service Call Reminder (not programmed from factory)

System Features

- External accessory operation
- Valve internally ported in 1 inch

System Dimensions

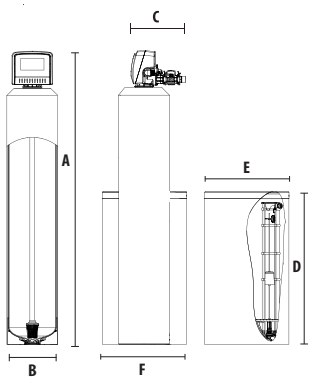

System Specifications

Part Number	BPCS100J	BPCS150J	BPCS200
Salt Used - Per Regeneration (lbs)	8	12	16
Regeneration Programming	Pre-Fill Brine	Pre-Fill Brine	Pre-Fill Brine
Grains Capacity	18,000	30,000	36,000
Resin Qty (lbs.)	39	65	78
Secondary Media	Cat Hac Carbon	Cat Hac Carbon	Cat Hac Carbon
Secondary Media Qty (lb)	7	7	14
Additional Media	N/A	N/A	N/A
Add’l Media Amt (lb)	N/A	N/A	N/A
Mineral Tank	10 x 44	10 x 54	12 x 52
Tank Jacket	YES	YES	NO
Media Loaded	YES	YES	NO
Brine Tank Size	15 x 36	15 x 36	15 x 36
Salt Storage Capacity	275	275	275
Service Flow Rate	13	14	16
Pipe Size (in)	1	1	1
Min-Max Pressure (psi)	20 - 100	20 - 100	20 - 100
Min-Max Temp (ºF)	35 - 100	35 - 100	35 - 100
Backwash GPM	2.7	2.7	3.2
Plumbing Connections	1 inch Male NPT Elbow	1 inch Male NPT Elbow	1 inch Male NPT Elbow
Bypass	YES	YES	YES
A measurement	51 in	61 in	59 in
B measurement	10 in	10 in	12 in
C measurement	16.5 in	16.5 in	18.5 in
D Measurement	36 in	36 in	36 in
E measurement	15 in	15 in	15 in
F measurement	17 in	17 in	17 in

BRITA | PRO