



NOTES: (UNLESS OTHERWISE SPECIFIED)

- SPECIFICATIONS AND DOCUMENTS:
 - PANEL CONSTRUCTION SHALL BE IAW OH-SPEC-001, PANEL TYPE A, METHOD 1.
 - ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
- ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS. ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING MANUFACTURING FILES:
 - FLAT PARTS: <MATERIAL> <MATERIAL COLOR, IF APPLICABLE> <THICKNESS, IN DECIMAL INCHES> <PN> <DESCRIPTION> <REV>_V<VERSION NUMBER OF MODEL>.SVG
 - FDM 3D PRINTED PARTS: FDM_<PN>_<DESCRIPTION>_<REV>_V<VERSION # OF MODEL>.3MF
- FN 8, 9, 18 & 19 ARE INCLUDED WITH THEIR RESPECTIVE SWITCHES, AND SHOULD NOT BE ORDERED SEPARATELY.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	5/1/2023	
A	FN 11: REPLACED WITH ALE+; NEW SHT ADDED	9/20/2026	

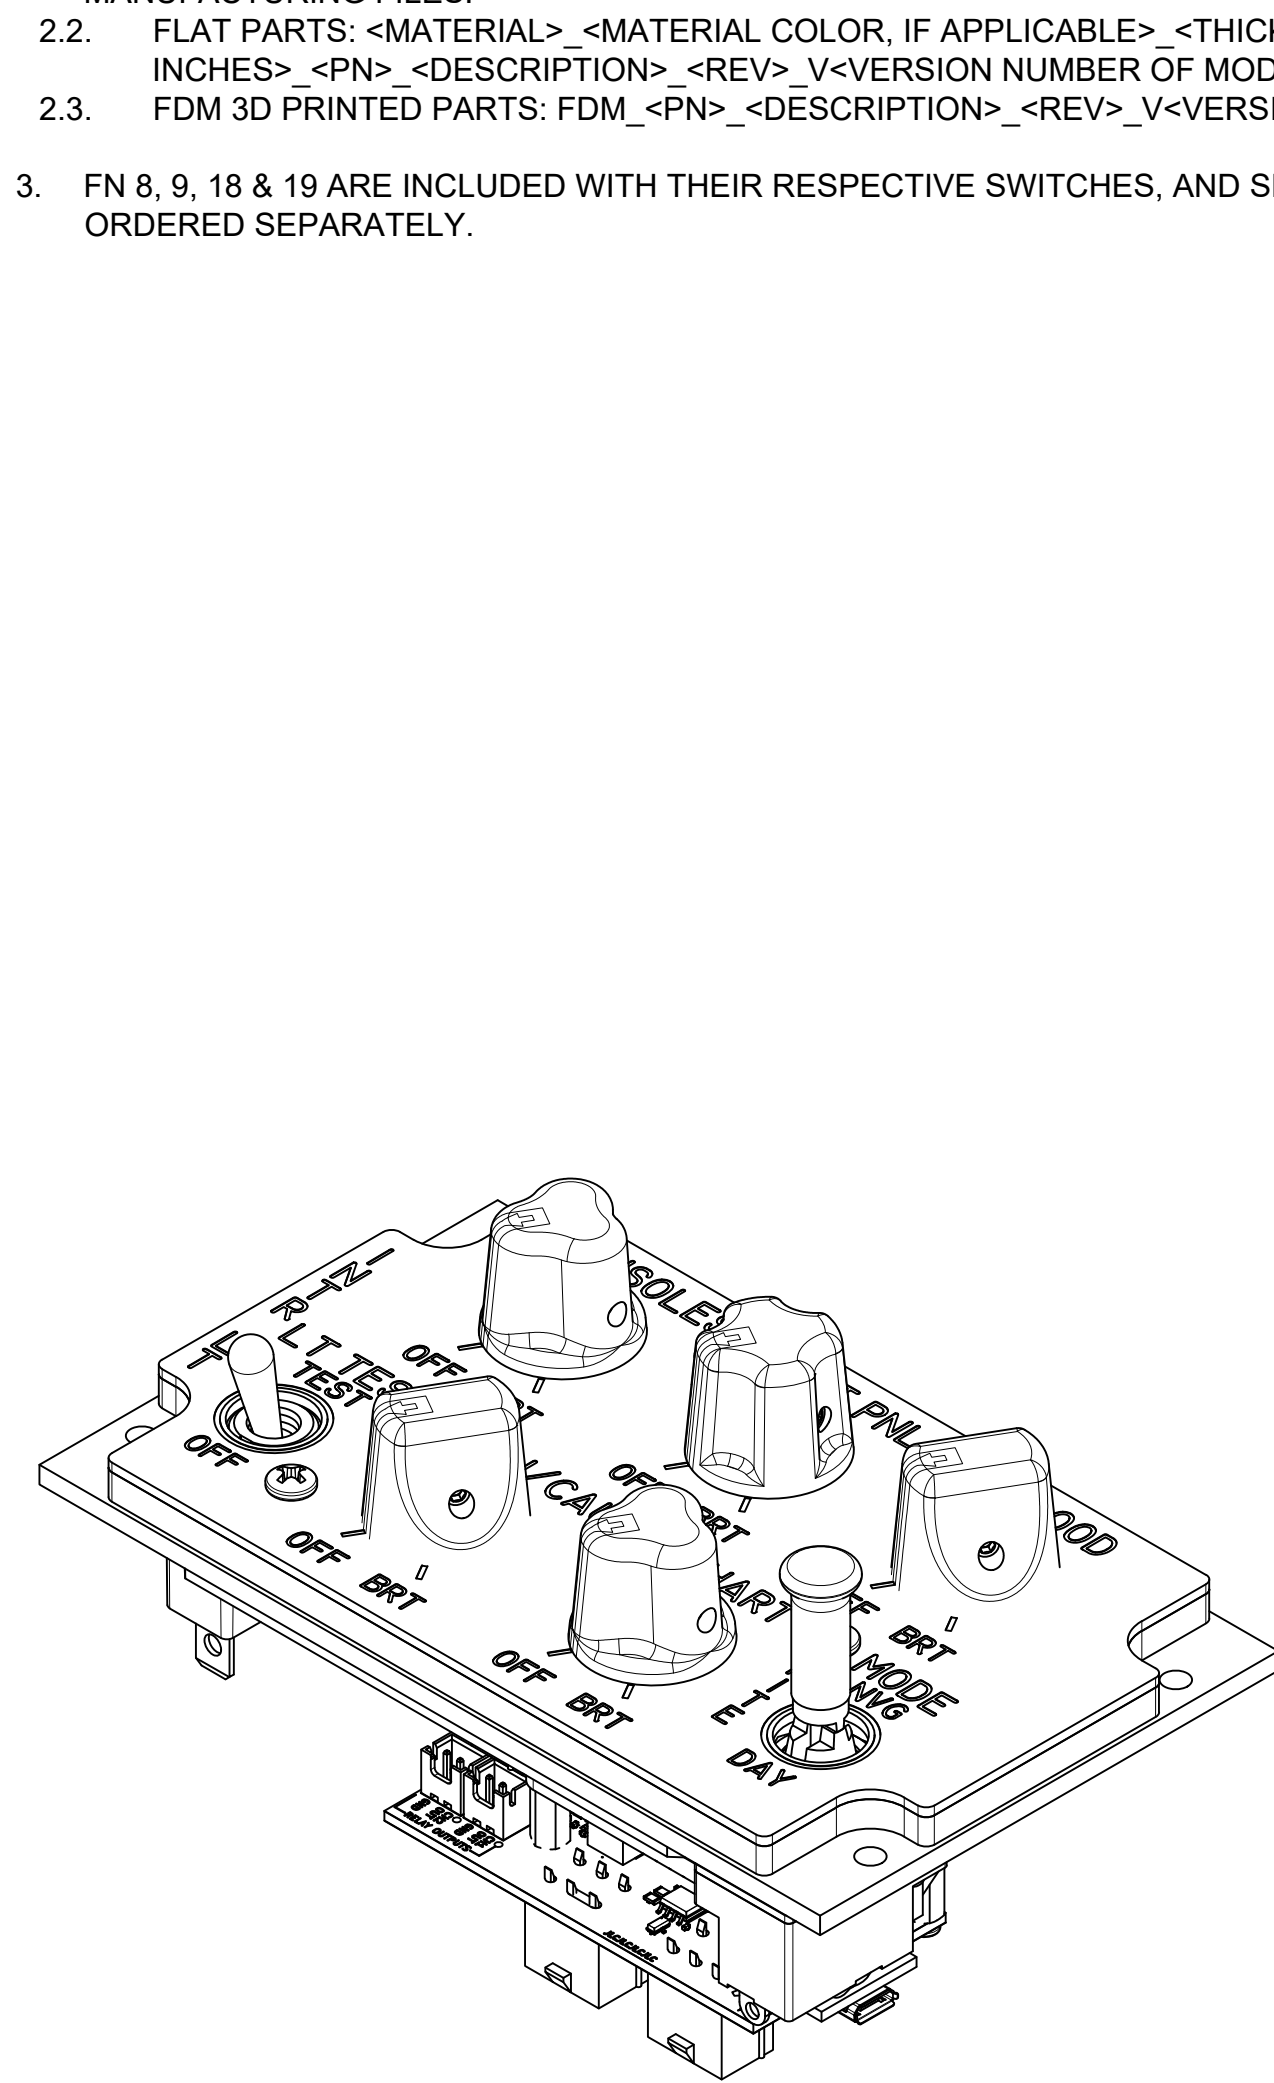

-1 ISO

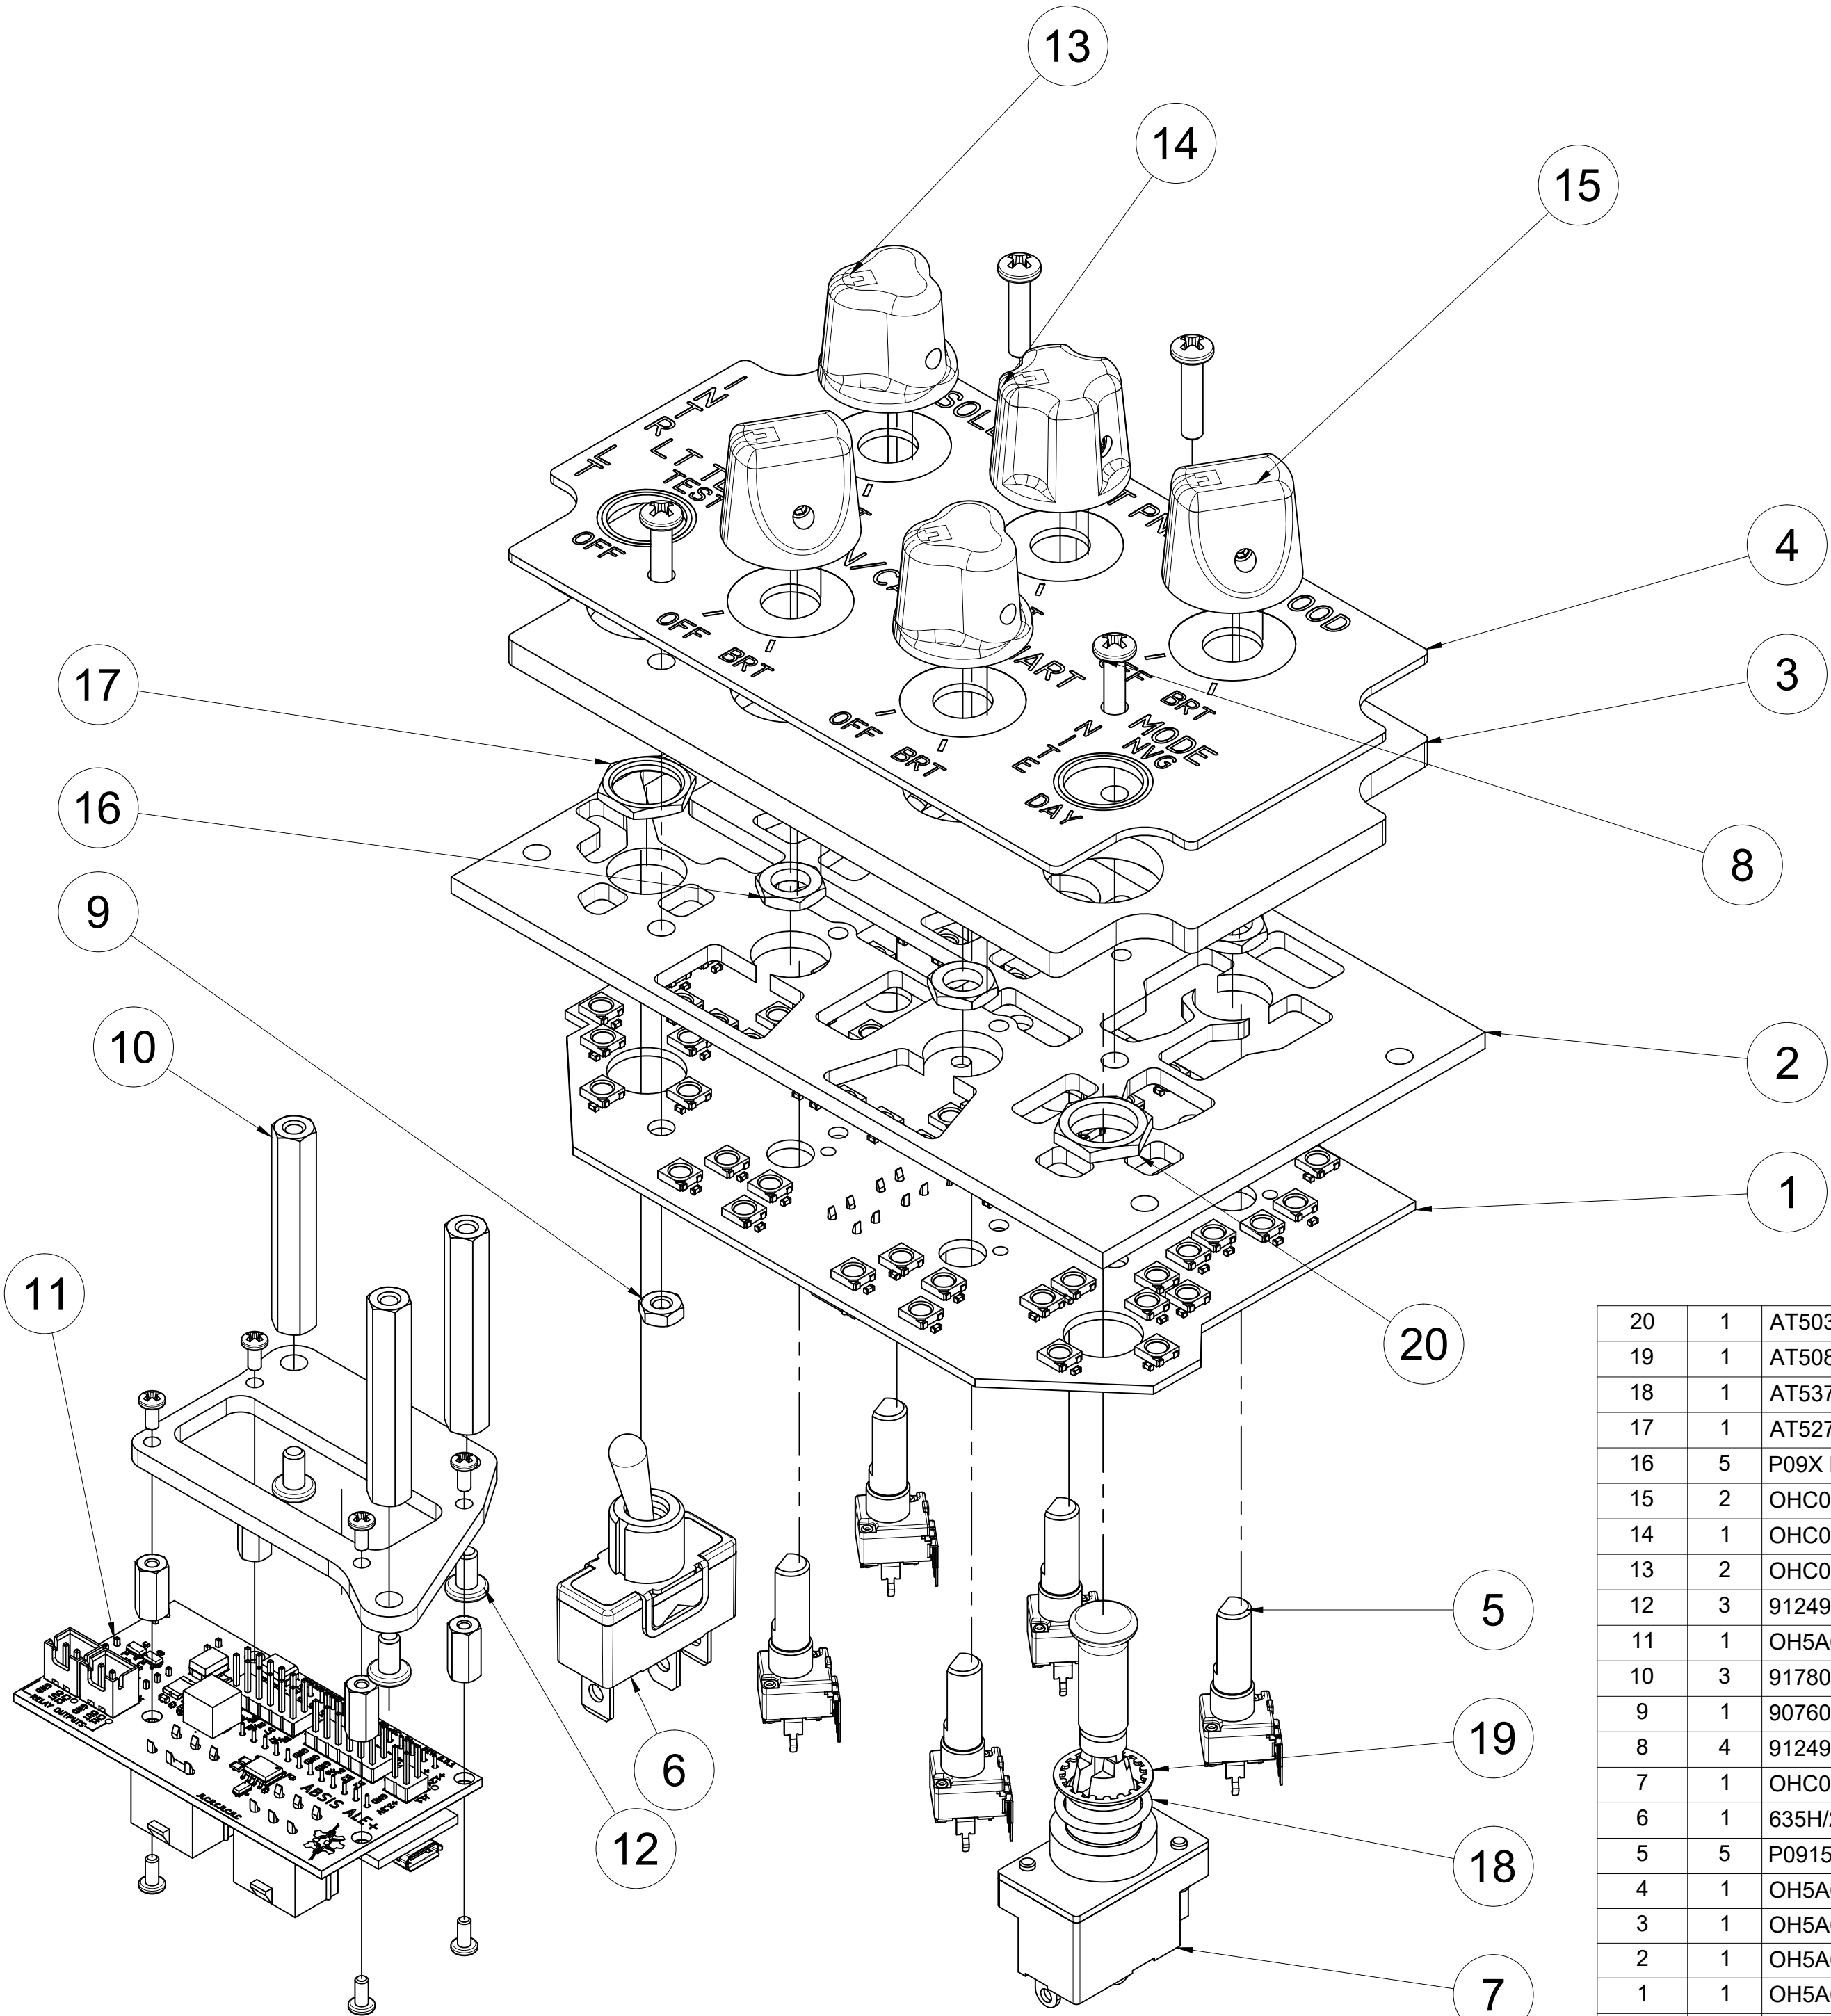


-1 ASSY
SCALE 1.2:1

20	1	AT503M	HEX NUT FOR SWITCH, M12-1	SS
19	1	AT508	LOCK WASHER FOR SWITCH, M12	SS
18	1	AT537	O-RING FOR SWITCH, 12 MM ID	RBR
17	1	AT527M	----	STL
16	5	P09X NUT	HEX NUT FOR POTENTIOMETER, M7X0.75	BRS
15	2	OHC0003-A-385FGB4	ASSY, KNOB, GREY, .25 D-SHAFT	----
14	1	OHC0003-A-385BGB4	ASSY, KNOB, GREY, .25 D-SHAFT	----
13	2	OHC0003-A-385EGB4	ASSY, KNOB, GREY, .25 D-SHAFT	----
12	3	91249A144	PHS, 6-32 X .250, 18-8, BLACK-OXIDE	SS
11	1	OH5A6A1-100	ASSY, INTR LT ABSIS MODULE	----
10	3	91780A337	STANDOFF, HEX, FEMALE, 6-32 X 1.50L X .25 HEX, ALUM	ALU
9	1	90760A007	NUT, JAM, #6-32, STEEL	STL
8	4	91249A151	PHS, #6-32 X .625, 18-8, BLK	SS
7	1	OHC0001-6	ASSY, SWITCH, S3AL, TALL BAT	----
6	1	635H/2	SWITCH, TOGGLE, ON-MOM, REGULAR BAT	N/A
5	5	P0915N-FC20BR10K	POTENTIOMETER, 9MM ROTARY, PANEL MOUNT	N/A
4	1	OH5A6A1-12	INTR LT LEGEND PLATE	RMRK
3	1	OH5A6A1-11	INTR LT LIGHTPLATE	ACRL
2	1	OH5A6A1-10	INTR LT BACKPLATE	ACRL
1	1	OH5A6A1-13	PCB, INTR LT	N/A

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
------	-----	-------------	-------------	----------

UNLESS OTHERWISE SPECIFIED:		UOS INCH TOLERANCES ARE:	
DIMENSIONS ARE IN INCHES.		DECIMALS:	
DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS.		.X ± .1	
INTERPRET DRAWING IAW ASME Y14.100-2017.		.XX ± .03	
INTERPRET DIM AND TOL IAW ASME Y14.5-2009.		.XXX ± .010	
REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX.		ANGLES:	
DIMENSIONS APPLY BEFORE FINISH.		MACHINED ± .5°	
		LOCATING ± .5°	
		FORMED ± 2°	
		CHAMFERS ± 5°	
		DRILLED HOLE DIAMETERS:	
		.0135 - .125: +.004/- .001	
		.126 - .250: +.005/- .001	
		.251 - .500: +.006/- .001	
		.501 - .750: +.008/- .001	
		.751 - 1.000: +.010/- .001	
		1.001 - 2.000: +.012/- .001	
DESIGNED	J. STEENSEN	5/1/2023	
CHECKED	J. STEENSEN	5/1/2023	
DRAWN	B. LAZARUS	5/1/2023	
		CC BY NC SA	
		OPEN HORNET	
		https://www.OpenHornet.com	
		ASSY, INTR LT PANEL	
		RIGHT CONSOLE	
SIZE	DWG NO	OH5A6A1-1	REV
D			A
SCALE 1.2:1		DO NOT SCALE DWG	SHEET 1/2

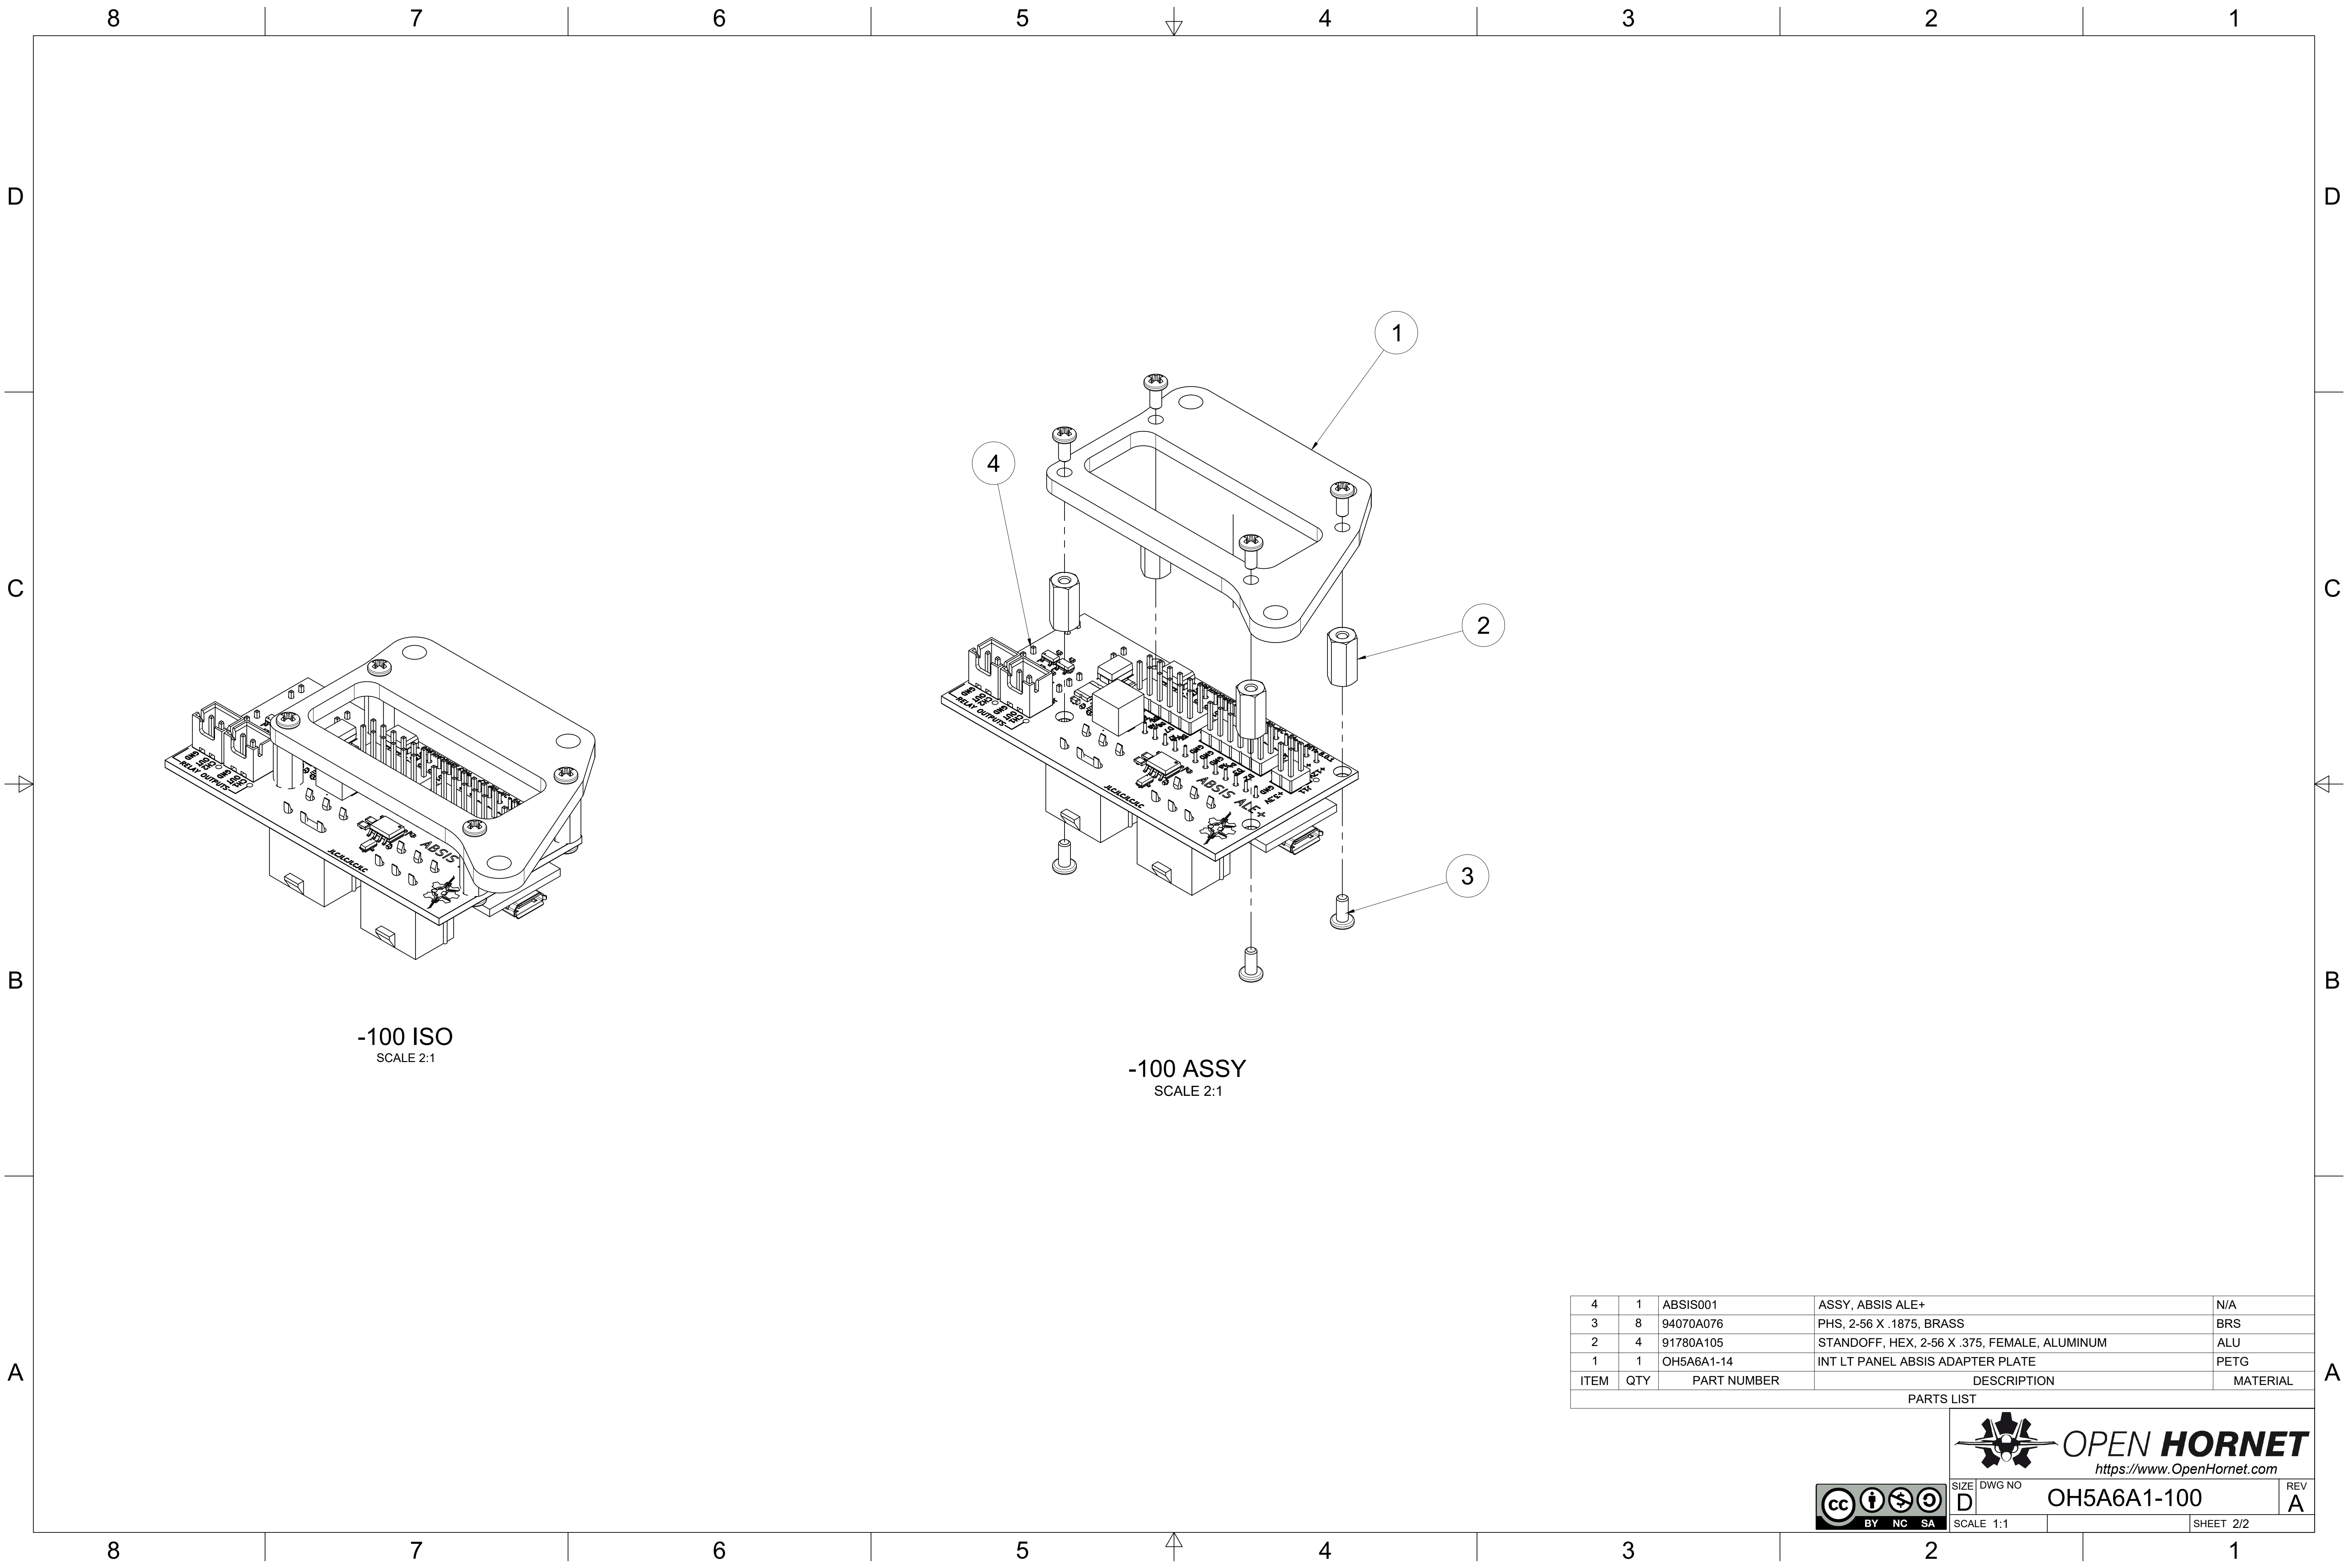

-100 ISO
SCALE 2:1

-100 ASSY
SCALE 2:1

4	1	ABSIS001	ASSY, ABSIS ALE+	N/A
3	8	94070A076	PHS, 2-56 X .1875, BRASS	BRS
2	4	91780A105	STANDOFF, HEX, 2-56 X .375, FEMALE, ALUMINUM	ALU
1	1	OH5A6A1-14	INT LT PANEL ABSIS ADAPTER PLATE	PETG
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				



SIZE	D	DWG NO	OH5A6A1-100	REV	A
SCALE	1:1			SHEET	2/2