


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SPECIFICATIONS AND DOCUMENTS:
1.1. PANEL CONSTRUCTION SHALL BE IAW OH-SPEC-001, PANEL TYPE A, METHOD 1.
1.2. ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
2. ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS. ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING INTERMEDIATE FILES:
2.1. FLAT PARTS: <MATERIAL> <MATERIAL COLOR, IF APPLICABLE>_<THICKNESS, IN DECIMAL INCHES> <PN> <REV>.<VERSION NUMBER OF MODEL>.DXF
2.2. FDM 3D PRINTED PARTS: FDM_<PN> <REV>.<VERSION # OF MODEL>.STL
2.3. MACHINED OR BENT PARTS: <PN>_<REV>.<VERSION # OF MODEL>.STEP

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	4/1/2023	
A	FN 21: ALE REPLACED WITH ALE+; REMOVED ALE RELAY; FN 16: REPLACED WITH 91780A115	9/26/2026	

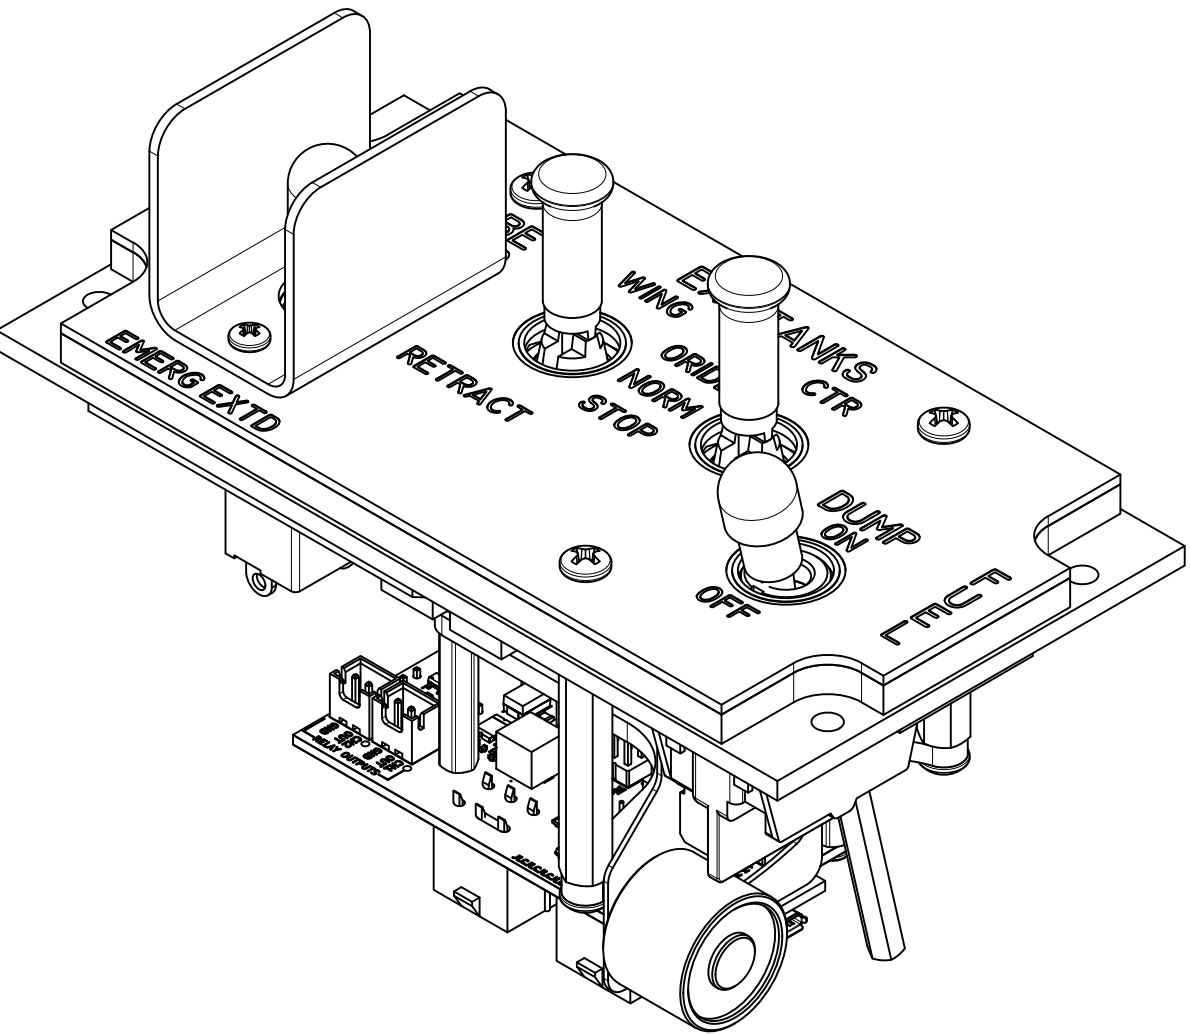

-1 ISO

-1 ASSY
SCALE 1.5:1

22	1	HDW4	HEX NUT FOR SWITCH, 15/32-32NS	N/A
21	1	ABSIS001	ASSY, ABSIS ALE+	N/A
20	3	90272A144	PHS, #6-32 X .250, STEEL	STL
19	1	OH4A5A1-15	FUEL ABSIS ADAPTER PLATE	PETG
18	3	91780A337	STANDOFF, #6-32 X 1.50, .25 HEX, FEMALE, ALUMINUM	ALU
17	8	94070A076	PHS, #2-56 X .1875, BRASS	BRS
16	4	91780A115	STANDOFF, #2-56 X .875, .1875 HEX, FEMALE, ALUMINUM	ALUMINUM
15	1	OHC0001-10	BAT, ROUND, FOR NKK SXAL SWITCH	ALU
14	1	OHC0005-1	ASSY, SWITCH, MAGNETICALLY HELD, (ON)-ON	----
13	3	AT503M	HEX NUT FOR SWITCH, M12-1	SS
12	3	AT508	LOCK WASHER FOR SWITCH, M12	SS
11	3	AT537	O-RING FOR SWITCH, 12 MM ID	RBR
10	2	OHC0001-6	ASSY, SWITCH, S3AL, TALL BAT	----
9	1	OHC0001-4	ASSY, SWITCH, S3AL, ROUND BAT	----
8	2	91841A005	NUT, #4-40, 18-8	STL
7	2	91249A111	PHS, 4-40 X .50, 18-8, BLACK-OXIDE	SS
6	3	91249A151	PHS, #6-32 X .625, 18-8, BLK	SS
5	1	OH4A5A1-14	REFUEL PROBE GUARD	PETG
4	1	OH4A5A1-13	FUEL PANEL LEGEND PLATE	RMRK
3	1	OH4A5A1-12	FUEL PANEL LIGHTPLATE	ACRL
2	1	OH4A5A1-11	FUEL PANEL BACKPLATE	ACRL
1	1	OH4A5A1-10	FUEL PANEL PCB V2	N/A

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				
UNLESS OTHERWISE SPECIFIED:			UOS INCH TOLERANCES ARE:	
DIMENSIONS ARE IN INCHES.			DECIMALS:	ANGLES:
DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS.			.X ± .1	MACHINED ± .5°
INTERPRET DRAWING IAW ASME Y14.100-2017.			.XX ± .03	LOCATING ± .5°
INTERPRET DIM AND TOL IAW ASME Y14.5-2009.			.XXX ± .010	FORMED ± 2°
REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX.				CHAMFERS ± 5°
DIMENSIONS APPLY BEFORE FINISH.			DRILLED HOLE DIAMETERS:	
			.0135 - .125:	+.004/- .001
			.126 - .250:	+.005/- .001
			.251 - .500:	+.006/- .001
			.501 - .750:	+.008/- .001
			.751 - 1.000:	+.010/- .001
			1.001 - 2.000:	+.012/- .001
DESIGNED	J. STEENSEN	4/1/2023		
CHECKED	J. STEENSEN	4/1/2023		
DRAWN	J. STEENSEN	9/25/2022		
SIZE	D	DWG NO	OH4A5A1-1	REV
SCALE	1:1	DO NOT SCALE DWG	SHEET	1/1



ASSY, FUEL PANEL

LEFT CONSOLE