


3/4" BALL VALVE



SuperKlean's new 3/4" ball valves give users the ability to shut down water/steam supply lines with a single pull of a lever. Its bronze or stainless steel construction enables this ball valve to be used with either water, oil, gas, or steam. All stainless steel components are 300 series stainless steel to prevent corrosion. Our 3/4" ball valve is the most widely used ball valve in the industry.

Part #:	Description
BALL VALVE-B	3/4" ball valve, Bronze (600 PSI WOG, 150 PSI, saturated steam)
BALL VALVE-SS	3/4" ball valve, Stainless Steel (600 PSI WOG, 150 PSI, saturated steam)

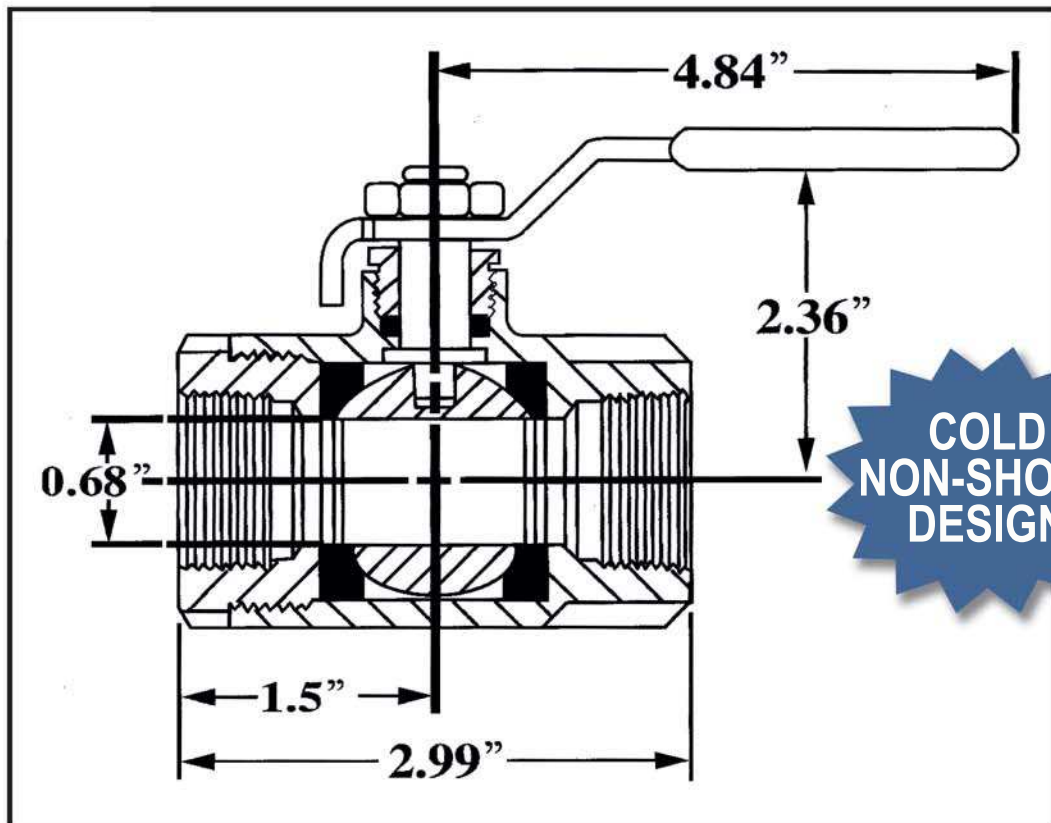

Principal Parts, Materials & Rating

Inlet / Outlet Diameter: 3/4" NPT

Ball Valve Body: Bronze or Stainless Steel

Lever and Grip: Plated Steel / Stainless Steel with Vinyl

Stem Packing: Teflon

Stem Bearing: Teflon

Ball: Chrome Plated

Seats: Teflon

Retainer: Brass or Stainless Steel

Gland Nut: Brass or Stainless Steel

Stem: Brass or Stainless Steel

Lever Nut: Stainless Steel

Body Seal: Teflon

Weight: 1.28 Lbs.

Pressure Rating: 600 PSI WOG - 150 PSI STEAM