



## Submittal Data Sheet

SkyAir 3.0-Ton Multi-Position Air Handler Heat Pump System

FTA36AAVJUA-RZA36AAVJU

### FEATURES

- All Aluminum Coil
- Less than 2% Air Leakage
- External Static Pressure up to 0.9 in. w.g.
- Optional Outside Air integration
- Factory integrated Refrigerant Leak Detection
- Factory Installed Disconnect Option (D-Model)
- Anti Corrosion Treatment on Heat Exchanger
- Dependable cooling and heating from -4F to 122F

### BENEFITS

- Upflow, downflow, horizontal right and horizontal left installation configurations
- Wide line of 3W to 19W optional electric heat
- 10 Year Parts and Compressor Warranty
- Long Pipe Lengths allow layout flexibility

### INDOOR UNIT



### OUTDOOR UNIT





Submittal Data Sheet

SkyAir 3.0-Ton Multi-Position Air Handler Heat Pump System  
FTA36AAVJUA-RZA36AAVJU

SYSTEM PERFORMANCE

|                                    |             |                               |                                                           |
|------------------------------------|-------------|-------------------------------|-----------------------------------------------------------|
| Indoor Unit Model No.              | FTA36AAVJUA | Indoor Unit Name:             | SkyAir 3.0-Ton Multi-Position Air Handler Indoor Unit     |
| Outdoor Unit Model No.             | RZA36AAVJU  | Outdoor Unit Name:            | SkyAir 3.0 Ton, Heat Pump Outdoor Unit                    |
| Rated Cooling Capacity (Btu/hr):   | 35,000      | Rated Cooling Conditions:     | Indoor (°F DB/WB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75 |
| Sensible Capacity (Btu/hr):        | 23,700      | Rated Piping Length(ft):      | 25                                                        |
| Max/Min Cooling Capacity (Btu/hr): | /           | Rated Height Difference (ft): | 0.00                                                      |
| Cooling Input Power (kW):          | 3.500       |                               |                                                           |
| SEER2 (Non-Ducted/Ducted):         | / 16.80     | HSPF2 (Non-Ducted/Ducted):    | / 9.0                                                     |
| EER2 (Non-Ducted/Ducted):          | / 10.00     |                               |                                                           |
| Rated Heating Capacity (Btu/hr):   | 40,500      | Rated Heating Conditions:     | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |

SYSTEM DETAILS

|                                        |      |                                   |          |
|----------------------------------------|------|-----------------------------------|----------|
| Refrigerant Type:                      | R-32 | Cooling Operation Range (°F DB):  | 23 - 122 |
| Holding Refrigerant Charge (lbs):      | 7.5  | Heating Operation Range (°F WB):  | -4 - 60  |
| Additional Charge (oz/ft):             | 0.90 | Max. Pipe Length (Vertical) (ft): | 98       |
| Pre-charge Piping (Length) (ft):       | 25   | Cooling Range w/Baffle (°F DB):   | 23 - 122 |
| Max. Pipe Length (Total) (ft):         | 230  |                                   |          |
| Max Height Separation (Ind to Ind ft): | 0    |                                   |          |



Submittal Data Sheet

SkyAir 3.0-Ton Multi-Position Air Handler Heat Pump System  
FTA36AAVJUA-RZA36AAVJU


INDOOR UNIT DETAILS

|                                          |                  |                                |              |
|------------------------------------------|------------------|--------------------------------|--------------|
| Power Supply (V/Hz/Ph):                  | 208/230 / 60 / 1 | Airflow Rate (H/M/L) (CFM):    | 1050/900/750 |
| Power Supply Connections:                | F1, F2           | Moisture Removal (Gal/hr):     |              |
| Min. Circuit Amps MCA (A):               | 4.9              | Gas Pipe Connection (inch):    | 5/8          |
| Max Overcurrent Protection (MOP) (A):    | 15               | Liquid Pipe Connection (inch): | 3/8          |
| Dimensions (HxWxD) (in):                 | 45 x 17-1/2 x 21 | Condensate Connection (inch):  | 3/4          |
| Ext. Static Pressure (Rated/Max) (inWg): | / 0.9            | Sound Pressure (H/M/L) (dBA):  | 52/48/44     |
| Net Weight (lb):                         | 118              | Sound Power Level (dBA):       |              |

DIMENSIONAL DRAWING - INDOOR UNIT

FTA18 - 36AAVJUD  
FTA18 - 36AAVJUA

Unit : in. (mm)

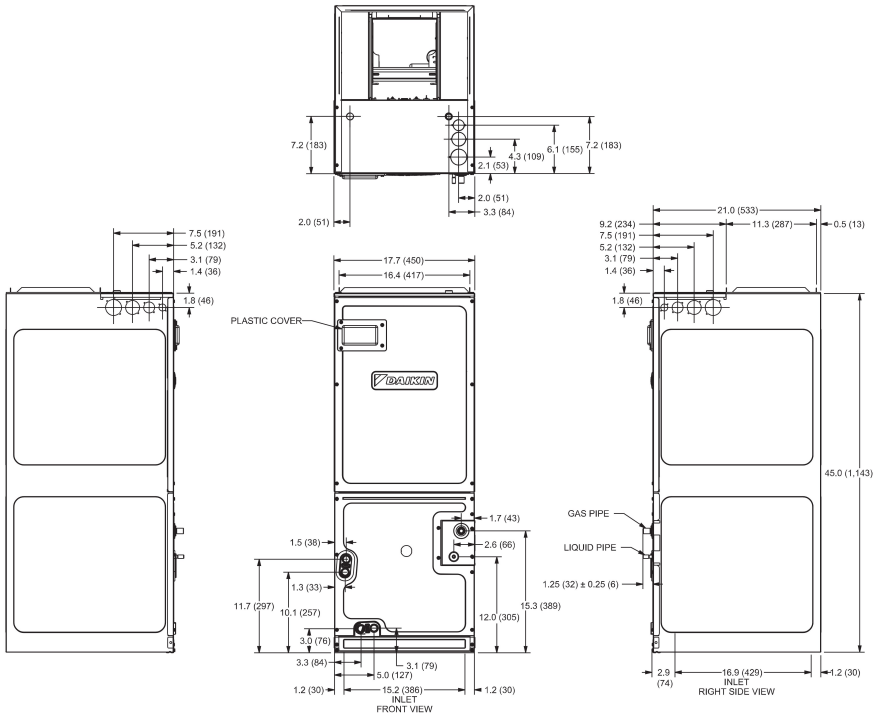

Submittal Data Sheet


SkyAir 3.0-Ton Multi-Position Air Handler Heat Pump System

FTA36AAVJUA-RZA36AAVJU

OUTDOOR UNIT DETAILS

|                                       |                           |                                |          |
|---------------------------------------|---------------------------|--------------------------------|----------|
| Power Supply (V/Hz/Ph):               | 208-230 / 60 / 1          | Compressor Stage:              | Inverter |
| Power Supply Connections:             | H1, H2                    | Capacity Control Range (%):    | -        |
| Min. Circuit Amps MCA (A):            | 34.6                      | Airflow Rate (H) (CFM):        | 3000     |
| Max Overcurrent Protection (MOP) (A): | 35                        | Gas Pipe Connection (inch):    | 5/8      |
| Max Starting Current MSC(A):          |                           | Liquid Pipe Connection (inch): | 3/8      |
| Rated Load Amps RLA(A):               |                           | Sound Pressure (H) (dBA):      | 56       |
| Dimensions (HxWxD) (in):              | 34-1/4 x 43-5/16 x 18-1/8 | Sound Power Level (dBA):       |          |
| Net Weight (lb):                      | 234                       |                                |          |

DIMENSIONAL DRAWING - OUTDOOR UNIT

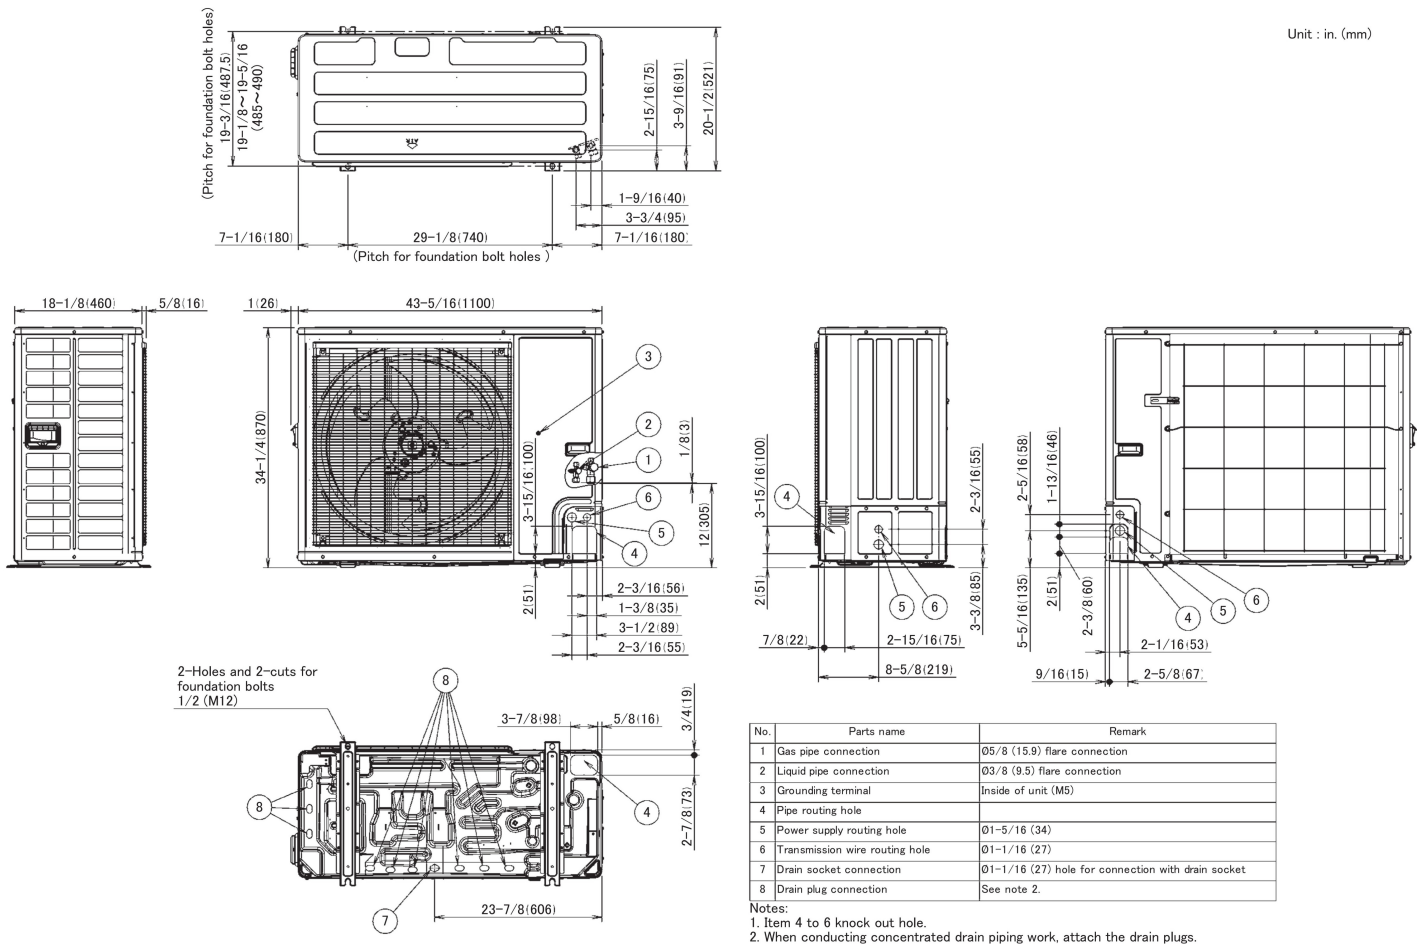



**Submittal Data Sheet**

SkyAir 3.0-Ton Multi-Position Air Handler Heat Pump System  
FTA36AAVJUA-RZA36AAVJU

INDOOR ACCESSORIES

| PART NUMBER | DESCRIPTION                                                                           | INCLUDED |
|-------------|---------------------------------------------------------------------------------------|----------|
| BRC1NRV71   | R32 Navigation Remote Controller                                                      | No       |
| BRP9A71     | Ventilation and alarm adapter                                                         | No       |
| BRP9A72     | Ventilation and alarm adapter                                                         | No       |
| HKTSD05X1   | Electric Heat Kit, 5 KW                                                               | No       |
| HKTSD08X1   | Electric Heat Kit, 8 KW                                                               | No       |
| HKTSD10X1   | Electric Heat Kit, 10 KW                                                              | No       |
| HKTSN05X1   | Electric Heat Kit, 5 KW, 1 PH                                                         | No       |
| HKTSN06X1   | Electric Heat Kit, 6 KW, 1 PH                                                         | No       |
| HKTSN08X1   | Electric Heat Kit, 8 KW, 1 PH                                                         | No       |
| HKTSN10X1   | Electric Heat Kit, 10 KW, 1 PH                                                        | No       |
| KRCS01-6B   | Remote Sensor                                                                         | No       |
| KRP1BB101   | Adaptor PCB Installation Box                                                          | No       |
| KRP1C77     | Wiring Adapter PCB                                                                    | No       |
| KRP4A74     | Group Control Adaptor PCB (Installation box for adaptor PCB "KRP1BB101" is necessary) | No       |
| KRP4A93     | Adaptor PCB Installation Box                                                          | No       |

OUTDOOR ACCESSORIES

| PART NUMBER | DESCRIPTION                                       | INCLUDED |
|-------------|---------------------------------------------------|----------|
| BRP2A82     | ABC Terminal for VRV IV S                         | No       |
| KEH042A41A  | Drain Pan heater for single phase VRVs and SkyAir | No       |
| KPW082A41   | Air direction adjustment grille                   | No       |
| KRC19-26A6  | COOL/HEAT SELECTOR                                | No       |