



Submittal Data Sheet

Daikin 1.25-Ton, Floor Mount Indoor Unit
FVXV15AVJUT9





Submittal Data Sheet

Daikin 1.25-Ton, Floor Mount Indoor Unit
FVXV15AVJUT9

ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 3	Gas Connection: (inch)	1/2
		Liquid Connection: (inch)	1/4
		Drain Connection: (inch)	3/4

SPECIFICATIONS							
COOLING - Airflow Rate (cfm):		COOLING - Sound Level (dBA):		HEATING - Airflow Rate (cfm):		HEATING - Sound Level (dBA):	
High:	392	High:	46	High:	417	High:	46
Med:	311	Med:	40	Med:	321	Med:	40
Low:	254	Low:	36	Low:	272	Low:	36
SuperLow:	201	SuperLow:	30	SuperLow:	215	SuperLow:	30
Dimensions (HxWxD) (in):		23-5/8 x 29-1/2 x 9-3/8		Net Weight (lb):		40	


Submittal Data Sheet

Daikin 1.25-Ton, Floor Mount Indoor Unit

FVXV15AVJUT9

DIMENSIONAL DRAWING

NOTES
1) THE → MARK SHOWS THE PIPING DIRECTION.
2) UNIT: Inch (mm)

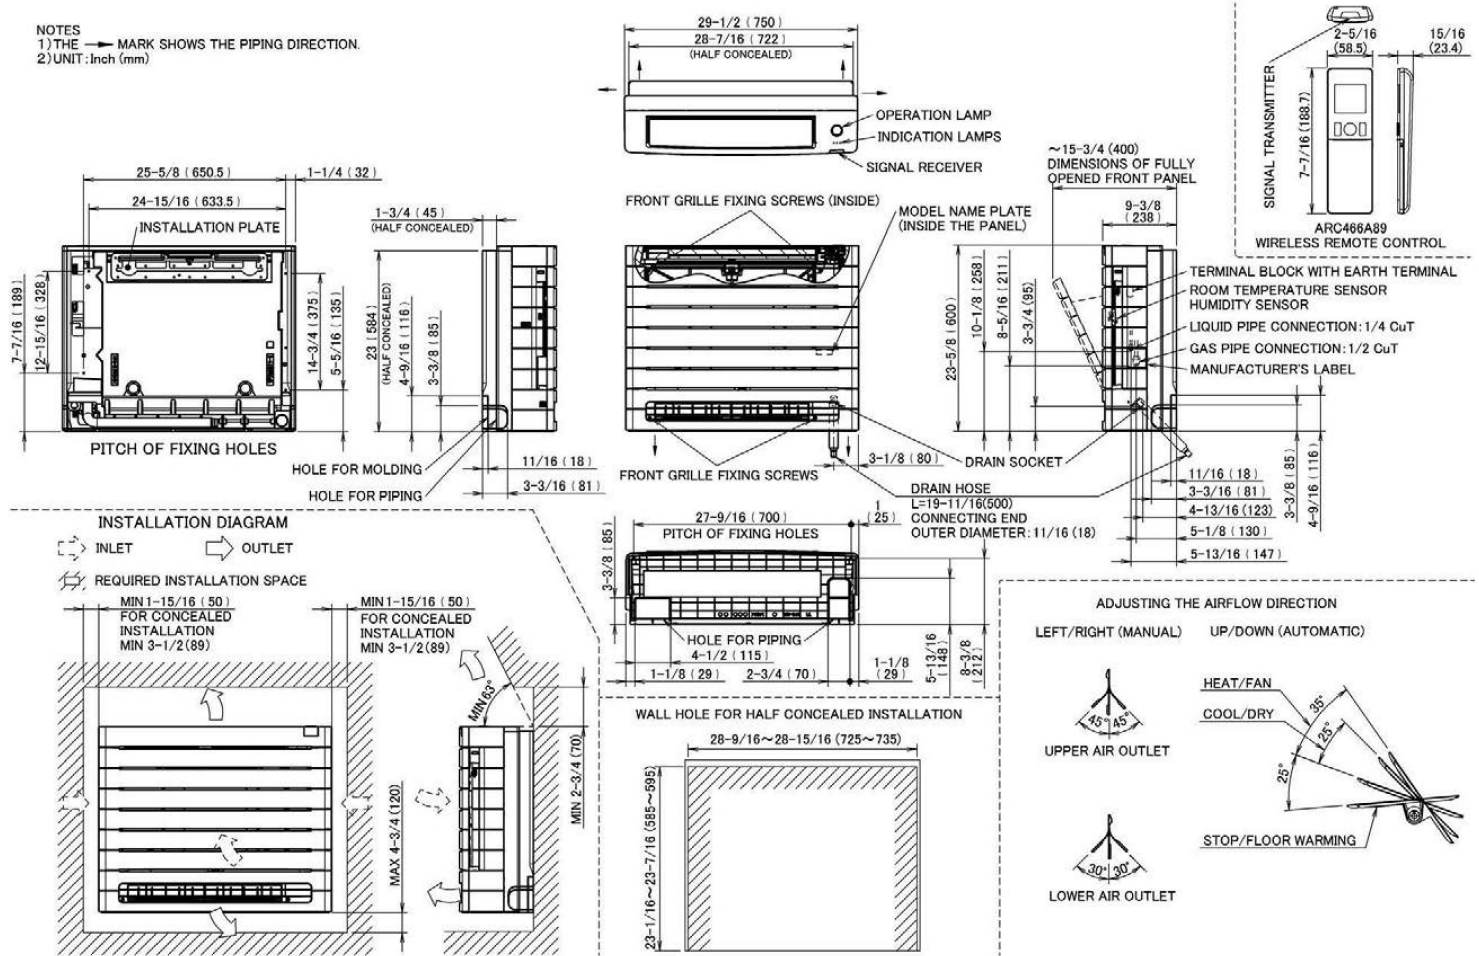



Submittal Data Sheet

Daikin 1.25-Ton, Floor Mount Indoor Unit
FVXV15AVJUT9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRC073A6	Wired Remote Controller (Requires Additional Wire Harness)	No
DCS302C71	Centralized Controller	No
DST301BA61	Schedule Timer	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	No
KER087A41	S21 conversion connector	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No