

Climate 5000 Series - Gen 4


9K BTU Universal Ducted IDU

Engineering
Submittal
Sheet



BOSCH

Overview and Project Information

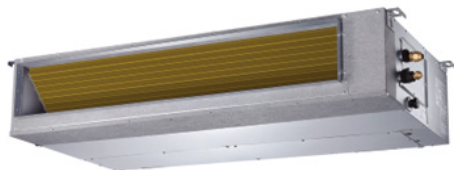

Project name	
Location	
Architect	
Engineer	
General contractor	
Reference #	


9K Btu Universal Ducted IDU

Indoor part number	8-733-962-709
Indoor model number	BMS500-AAU009-1AHDXD
Electrical Data	
Power supply (V / Ø / Hz)	208-230 / 1 / 60
Piping	
Liquid side (in/mm)	1/4" / Ø6.35
Gas side (in/mm)	3/8" / Ø9.52
Accessories	
BMS-DRY-XXD (8733969263)	24V Interface

System Data





Refrigerant type		R454B
Design pressure (PSIG)		550 / 340
IDU	Fan motor model	ZKFN-81-8-1
	Fan motor qty (ea)	1
	Fan motor input (W)	150.0
	Fan speed, H / M / L (RPM)	980 / 910 / 840
	Air flow, Turbo / H / M / L / Si (CFM)	323.7 / 264.9 / 206.0 / 147.2 / 117.7
	Noise level, Turbo / H / M / L / Si (dB(A))	N/A / 32.5 / 31 / 29.5 / 23
	Net weight (lbs / kg)	39.46 / 17.9
	Gross weight (lbs / kg)	46.74 / 21.2
	ESP range (Pa)	0-100
Drain pipe outside diameter in. (mm)		OD 0.98 (25)

Indoor Unit Dimensions and Connections

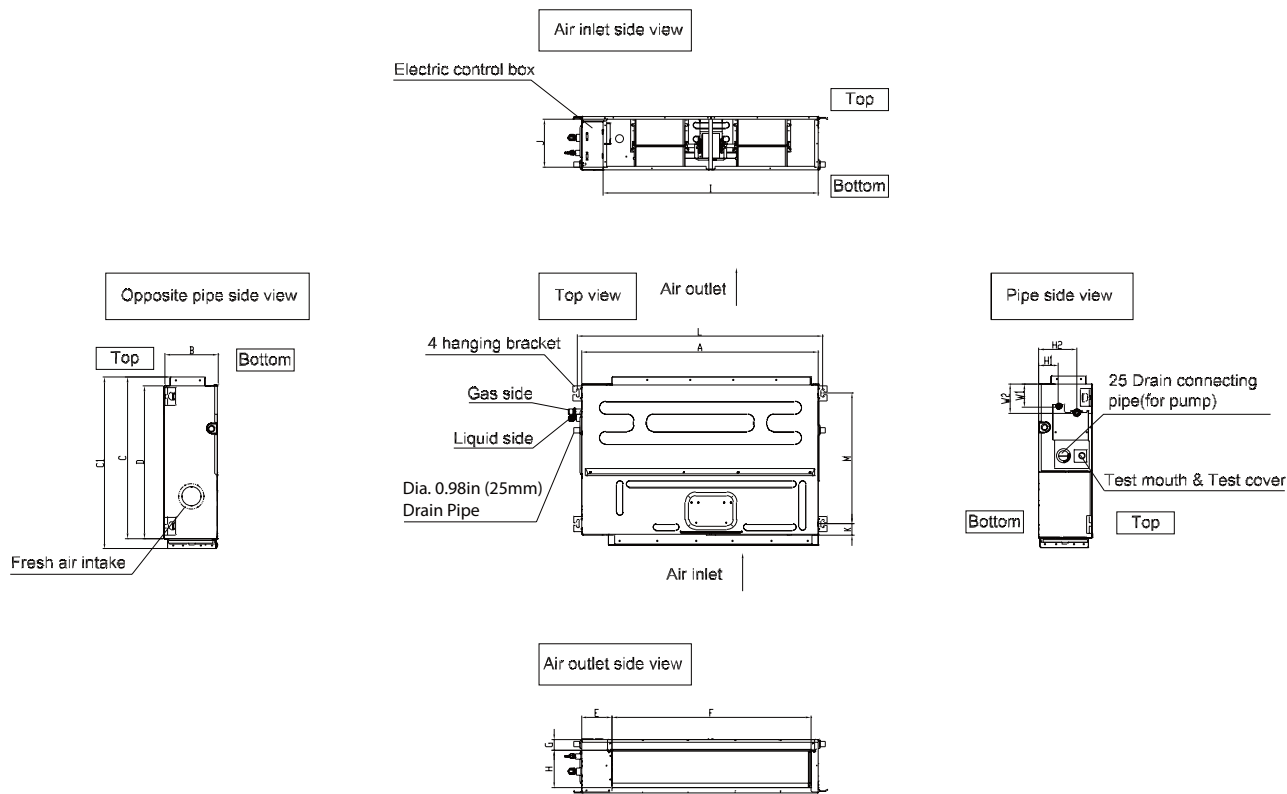

Model	Outline dimension (in)				Air outlet dimension (in)				Return air (in)			Mounting (in)		Gas and liquid valve (in)			
	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
BMS500-AAU009-1AHDXD	27.6	7.9	19.9	17.7	5.4	21.1	1.2	6.0	23.6	7.3	2.0	29.2	14.2	3.3	5.5	3.3	3.3

Air Volume

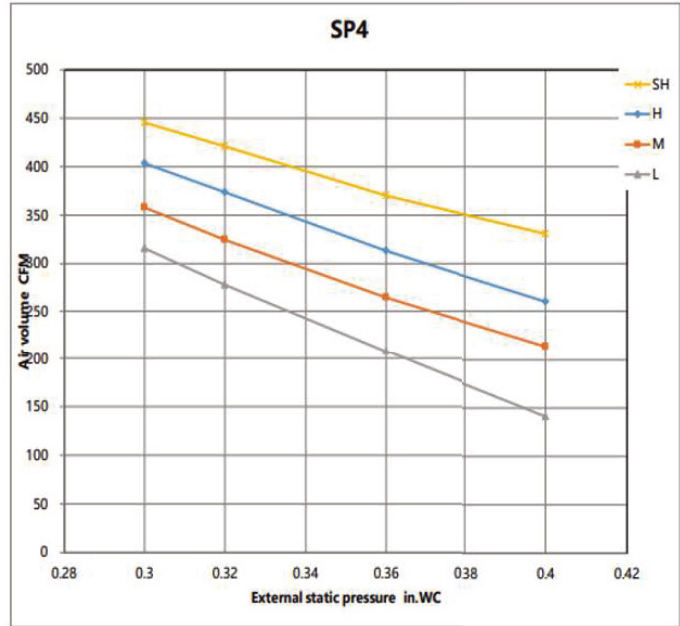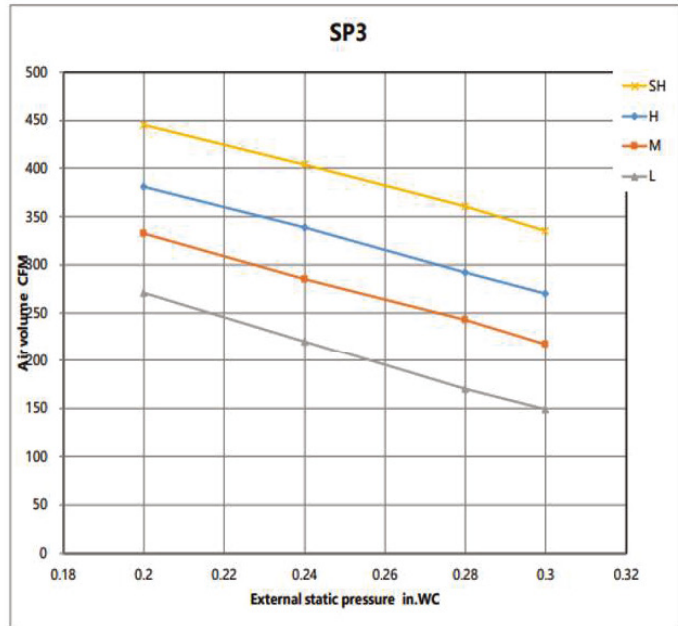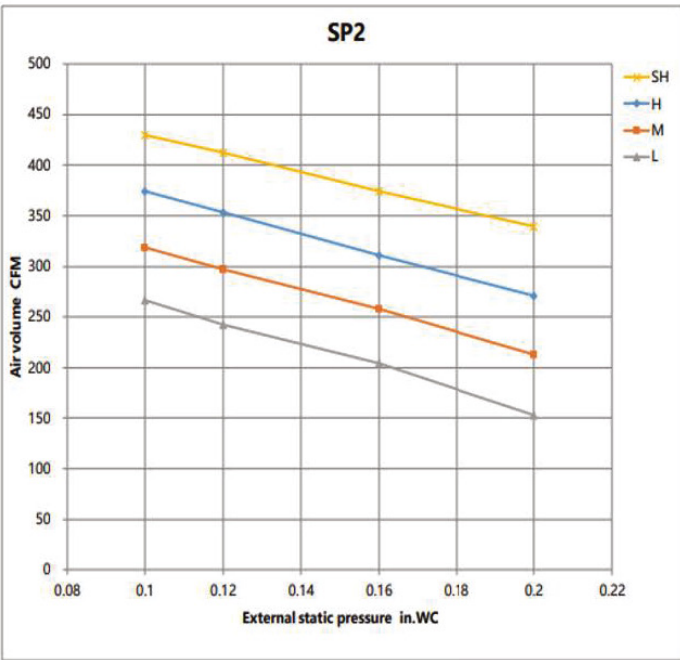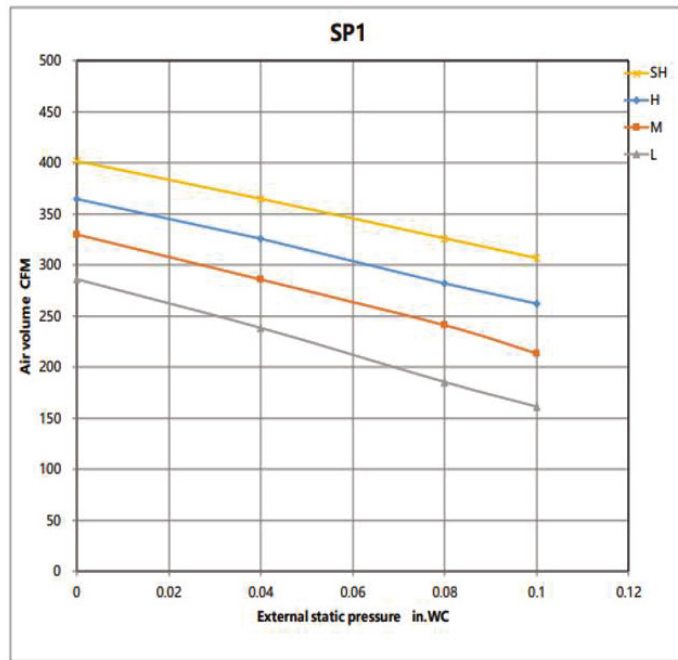

Air Volume

