



## BRAUSSE1100-C6 地基图 FLOOR PLAN

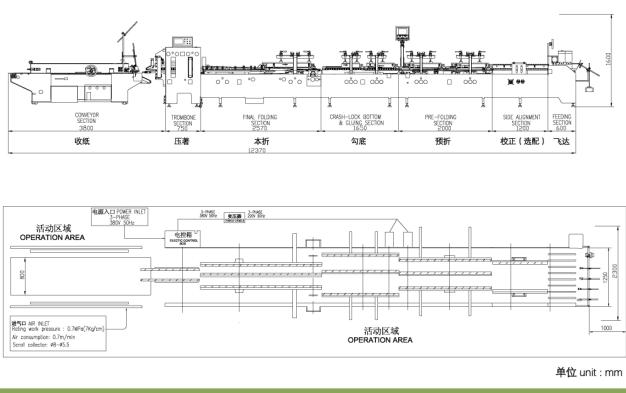


### 技术参数 TECHNICAL DATA


#### 直线盒 Straightline Cartons




#### 勾底盒 Bottomlock Cartons




#### 两侧边贴盒 Double Sides/Double Wall



#### 4角盒 4-Corner Collapsible Boxes



#### 6角盒 6-Corner Collapsible Boxes



## 全自动糊盒机 AUTOMATIC FOLDER GLUER BRAUSSE1100-C6

### 技术规格 Specifications

最大纸张尺寸	Max. Sheet Size:	1100 × 800 mm (W × L)
最小纸张尺寸	Min. Sheet Size:	126 × 60 mm (W × L)
(小盒折盒装置最小尺寸: 76 × 60 mm)		76 × 60 mm (W × L) (Small Box Folding Device)
最大皮带速度	Max. Belt Speed:	320 mm/min
适 用 纸 张	Stock Range:	卡纸 200-800g/m <sup>2</sup> , 瓦楞纸可达 E 瓦楞 Solid board up to 800g/m <sup>2</sup> . Corrugated up to E-Flute
机器 长 度	Overall Length:	约12 m
机器 高 度	Overall Height:	约1600 mm
机器 宽 度	Overall Width:	约2300 mm
总 功 率	Total Power:	35 kva
最 大 用 气 量	Max Pumping Capacity:	0.7m <sup>3</sup> /min
总 重 量	Total Net Weight:	7 Tones

由于技术改良，制造商保留权利修改有关参数及功能，恕不另行通知。  
In the interest of product improvement, the manufacturer reserves its right to change specifications and features without notice.



**BRAUSSE**  
博 斯 特 集 团 成 员

上海旭恒精工机械制造有限公司  
Shanghai Eternal Machinery Co.,Ltd.

内销部/工厂地址:  
上海市嘉定区安亭镇泰盈路1125号  
邮编: 201800  
电话: +86-21-59024511 59024811-2487  
传真: 021-59024277  
邮箱: sales@eterna-shanghai.com  
网址: www.eterna-group.com

Shanghai Plant:  
No. 1125 Taishun Road, Anting Town,  
Jiading District, Shanghai, 201814 China  
Tel: +86-21-59024511 59024811-2487  
Fax: +86-21-5902477  
E-mail: sales@eterna-shanghai.com


外销部:  
上海市徐汇区斜土路2601号嘉汇广场T1楼  
13楼  
邮编: 200030  
电话: +86-21-64262153  
传真: +86-21-64262153  
E-mail: export@eterna-shanghai.com  
Website: www.eterna-group.com

International Sales Dept:  
T1/13A/B Gateway Plaza, No. 2601 Xietu Road,  
Shanghai, 200030, China  
邮编: 200030  
电话: +86-21-64262153  
传真: +86-21-64262153  
E-mail: export@eterna-shanghai.com  
Website: www.eterna-group.com

**BRAUSSE**  
A MEMBER OF BOBST GROUP

**全自动糊盒机**  
Automatic Folder Gluer

## BRAUSSE1100-C6

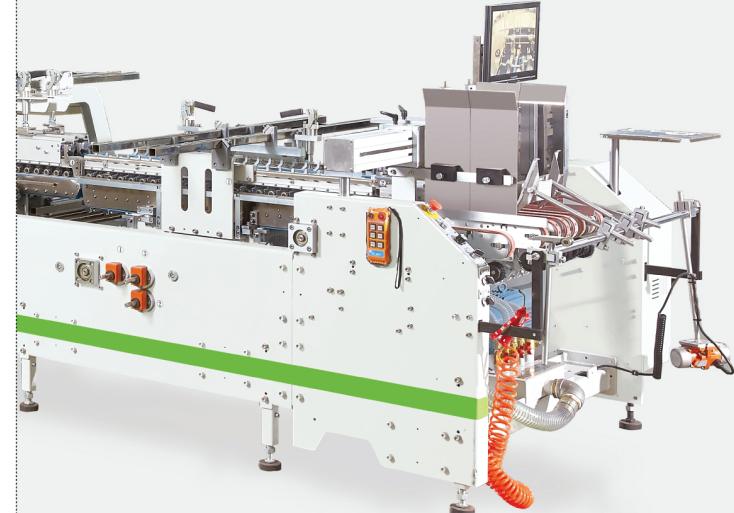

上海旭恒精工机械制造有限公司  
Shanghai Eternal Machinery Co.,Ltd.

# 全自动糊盒机 **BRAUSSE1100-C6**

AUTOMATIC FOLDER GLUER

ETERNA  
博 斯 特 集 团 成 员




## 压着部 TROMBONE SECTION

- 高速计数踢纸装置，积纸侦测。
- 独立电机、变频调速。
- High speed Kick Counter and Jam Detector as standard.
- Upper/Lower belts can be telescopically adjusted easily.
- AC motor for variable frequency speed control.
- Ready for retrofit In-Line Ejector Device. (options) .
- 上下皮带伸缩调整简单易操作。
- 可选购在线不合格品剔除装置。
- 可选配电子喷胶系统。
- Standard Lower glue pots each operation/drive side.
- Upper glue wheel system as an option.
- Non-contact gluing system as an option.



## 上胶系统 / GLUING SYSTEM

- 标配左、右各一机械式下糊筒。
- 可选配电子喷胶系统。
- Standard Lower glue pots each operation/drive side.
- Upper glue wheel system as an option.
- Non-contact gluing system as an option.
- 左右外折皮带可微调整皮带速度。
- 中间带板为可拆卸式。
- Left/Right outward folding belts with speed micro-adjustment.
- Lower central carrier can be removed in one piece easily.

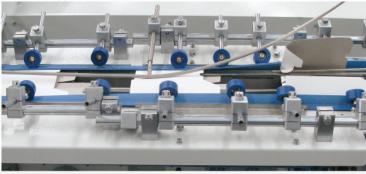

## 本折部 / FINAL FOLD SECTION

- 左右外折皮带可微调整皮带速度。
- 中间带板为可拆卸式。
- Left/Right outward folding belts with speed micro-adjustment.
- Lower central carrier can be removed in one piece easily.




## 勾底部 / LOCK BOTTOM SECTION

- 3 板式传送带结构，分段式上带板功能与预折部相同，能有效克服异型盒产品的生产。
- 中上带板为可拆卸式，可视产品需求拆装调试。
- 3-carrier construction. Sectional upper carrier allowed to use as pre-breaking function for irregular boxes.
- Upper central carrier can be removed to give space for job set up.

## 伺服后勾系统

### SERVO DRIVE BACK FOLDING SYSTEM

- C3 机型预留可追加 4/6 角后勾系统。
- Reserved space from original C3 for servo drive back folding system.
- #1 and #2 servo shafts controlled individually, easy to mount hooks with one bolt only.
- Data entry keypad with digital display to ensure job set up easier.



## 飞达部 FEEDER SECTION

- 左右挡板及给纸门闸整体气压式升降。
- 去屑毛刷，可任意调整角度。
- 托纸杆配有高性能震动马达。
- 单独电机，变频调速。
- 可选购送纸吸风装置。
- Side guides and feeder gates can be pneumatically lifted.
- Belt cleaning Brush with easy angle adjustment.
- Supporting bars with vibration motor.
- A/C motor for variable frequency speed control.
- Suction Feeding System as an option.
- Mini Feeder Gate / Air Feeder Gate as options.



## 收纸部 / DELIVERY SECTION

- 收纸皮带施压采气压式压合与压力调节。
- 标配压力范围 2 米。可选购加长收纸部，压力范围为 3 米。
- 可选购横向收纸机。
- 可选购半自动打包机，与糊盒机联机使用。
- Pneumatic pressing system for easy adjustment to obtain perfect gluing performance.
- Standard conveyor compress area 2 Meter length. To extend compress length can be an option.
- Extended Delivery Table is an option, either straight or cross direction.
- Ready to be in line with J-Packer.



## 校正部 SIDE ALIGNMENT SECTION



## 校正部 SIDE ALIGNMENT SECTION

- 可选购校正部，加装在飞达部和预折部之间。
- Side Alignment Section can be retrofitted between Feeder and Pre-Breaking Section.



## 预折部 PRE-BREAKING SECTION

- 3 板式传送带结构，左 180 度，右 135 度预折装置。
- 分段式上带板，并结合特殊设计，可因产品的需求伸缩调节。
- 3-carrier construction with pre-break sword (180°) and pre-break belt (135°) .
- Sectional upper carrier can be telescopically adjusted to meet wide range boxes.