



BACKHOE LOADER | RANGE



BUILDING THE **ULTIMATE RANGE.**

Ever since JCB was founded by Joseph Cyril Bamford in a small garage in Staffordshire in 1945, innovation has driven our machines and our thinking. Of course we've grown since then – to employ over 10,000 people across 4 continents – but innovation remains at the heart of everything we do.

A history of innovation

We've been innovating since day one, and we've always cultivated a uniquely fearless approach to design. Indeed, we've invented whole new genres of machinery – the backhoe loader and the telehandler for example – and revolutionised others like the tractor or skid steer loader.

The best backup in the business

A key component of any JCB machine is peerless backup and support: our 2,000-strong global dealership and service network keeps the customer at the centre of everything we do, in over 150 countries worldwide. Our World Parts Centre, meanwhile, aims to deliver anywhere on earth within 24 hours.

Success by the million

Every JCB is designed and built to offer ultimate productivity, durability, efficiency, safety, comfort and reliability, so it's perhaps not surprising that we've just built our millionth machine. As you'd expect from such an innovative company though, we won't be resting on our laurels.





OVER SIXTY YEARS AND COUNTING.

AT MORE THAN SIXTY YEARS OF AGE, JCB'S ICONIC BACKHOE LOADER IS JUST AS FRESH AND INNOVATIVE TODAY AS IT WAS WHEN IT WAS FIRST CONCEIVED. BACK THEN, COMPANY FOUNDER JOSEPH CYRIL BAMFORD INVENTED THE ENTIRE BACKHOE LOADER CONCEPT WHEN HE COMBINED A LIGHTWEIGHT BACKHOE WITH A TRACTOR LOADER. FOR THE FIRST TIME, A SINGLE MACHINE COMBINED A FRONT SHOVEL AND REAR EXCAVATOR ARM.

Today's JCB continues to innovate and is the world's best selling backhoe.



THE 50'S. The JCB MKI Major Loader.



THE 60'S. The JCB I.



THE 70'S. The JCB 3CIII.



THE 80'S. The JCB 3CX.


The world’s first... and still the best.

Throughout the intervening years, JCB has continued to improve on this basic concept by using innovative thinking and advanced engineering principles. In the process, many of our innovations have become industry-standard features. Like four-wheel drive, for example, as well as extending dippers, torque converter drive, powershift transmissions, all-wheel steer, sideshift chassis, powerslide, and skid steer.

As a direct result of our innovative thinking and pioneering spirit, our backhoe loader range has led the world in terms of both features and sales. Today, we’re the biggest-selling backhoe manufacturer on the planet, and have been for decades.

An innovative future.

We recognise that a large part of our success is down to the fact that we listen to what our customers want. And we’ll be continuing this trend, always striving to build the most productive, dependable and efficient machines that technology will allow. In an increasingly tough market, we’re already attaching particular importance to versatility, residuals and fuel efficiency, all of which you’ll find in abundance on this latest range of backhoe loaders.

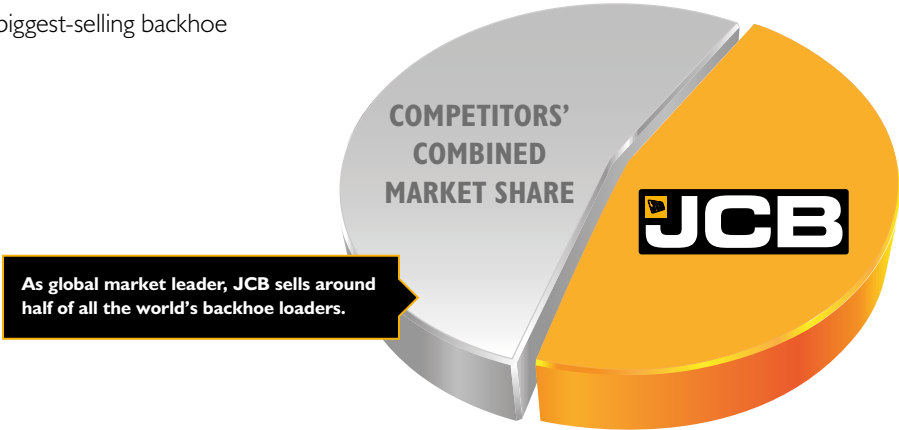

THE 90'S. The JCB 3CX Sitemaster.



THE 00'S. The JCB 3CX Eco.



THE 10'S. The JCB 3CX Compact.



THE FUTURE?

3CX COMPACT TOOLCARRIER.

1. More comfort

The 3CX Compact Toolcarrier is 35% smaller than a standard backhoe, allowing access to the tightest of spaces.

2. Easy to operate

With a spacious cab and excavator style controls fitted as standard provides ease of use and controllability.

3. More versatile

The 3CX Compact is not only designed for the vast range of toolcarrier attachments, it also has the ability to pick up a wide range of skid steer loader attachments.

4. More manoeuvrable

With 4WS and an impressive 5.8m turning circle allows the machine to turn 180° in a single carriageway.

5. Speed is key

Fitted with a three speed 40kph hydrostatic transmission makes the 3CX Compact an independent machine with a large working radius for optimum productivity.

6. Digging to great depths

With the option of either 10/12ft excavator end and extending dipper, gives the machine excellent dig depth and reach for reduced repositioning.



The ultimate toolcarrier.



The handheld tool circuit increases the ability for one machine to tackle any job.



Ideal for confined spaces.

		3CX COMPACT TOOLCARRIER
Operating weight	kg	6070
Gross engine power	kW (hp)	55 (74)
Dig depth	ret/ext m	3.07 / 3.72 – 3.68 / 4.33
Steer mode		4WS
Loader shovel breakout	kgf	3758
Maximum loader shovel capacity	m ³	0.6
Maximum dipper tearout	ret/ext kgf	2870
Maximum bucket tearout	kgf	3340

3CX ECO BACKHOE LOADER.

1. EcoMAX efficiency

The JCB EcoMAX engine in our latest 3CX Eco is so clean that there's no need for exhaust after-treatment, heat resistant oils or AdBlue, saving you money on servicing.

2. Best cab in class

With low noise levels, ample storage and even a coolbox on air conditioned models, our cab is the biggest and best around.

3. Going with the flow

Benefit from low and high-flow hydraulic power with our bi-directional system, capable of powering many attachments.

4. Tonnes of capacity

Placing loads of up to 2000kg is no problem with the 3CX's front hydraulic quickhitch and integrated pallet forks.

5. Made for each other

The EcoMAX engine is mated to an all-JCB driveline for ultimate performance and reliability.

6. Maximum manoeuvrability

JCB's Powerslide feature is better than ever, boasting a large hydraulic ram for plenty of repositioning power.



Mounted behind the front axle, the steering ram is protected from impact damage.



Our innovative scoop design one-piece rear windscreen offers excellent visibility.



The 3CX Contractor's heavy-duty lift rams provide 3.87 tonnes of force.



A backhoe loader is, by its very nature, a highly versatile machine, but our optional extras make it all the more so, allowing you to tailor your 3CX to a huge array of different applications.



To keep operators safe even when using powered attachments, we fit an impact-protected rear screen.

		3CX	3CX SM
Operating weight	kg	7370	8070
Gross engine power	kW (hp)	55 (74)	55 (74)
Dig depth	ret/ext m	4.24	4.25 / 5.46
Steer mode		2WS	2WS
Loader shovel breakout	kgf	6170	6531
Maximum loader shovel capacity	m ³	1.1*	1.2**
Maximum dipper tearout	ret/ext kgf	3217	3225 / 2255
Maximum bucket tearout	kgf	6324	6228

* GP Shovel ** 6-in-1 Shovel

3CX. ENGINE SIZE: 55, 68, 81 kW DIG DEPTH: 14ft AFTER TREATMENT: Adblue and SCR (No DPF) (68-81 kW only)

1. High versatility

With the combined hammer/ bi-directional provide operation to a wide variety of single and double acting attachments.

2. Excellent visibility

No impact on the bonnet line with stage IV installation maintain excellent visibility to loader end.

5. Easy repositioning

Powerslide allows the operator to sideshift the excavator across from left to right hydraulically, reducing ground damage and less repositioning of the machine therefore increasing productivity.

3. Added protection

Shovel streetpads and rear stabiliser streetpads provide maximum protection when working on asphalt. Rear light guards project impact damage when on site.

4. Maximum traction

Switchable 4WD and optional automatic limited slip differential provide greater traction and maintain performance in soft ground conditions.



Mounted behind the front axle, the steering ram is protected from impact damage.



Our innovative scoop design one-piece rear window offers excellent visibility.



JCB's ergonomic seat-mounted excavator-style controls (a standard fit on our Easy and Advanced Easy Control machines) make for great manoeuvrability, fingertip control and supreme comfort.

		3CX / 3CX SM	3CX SUPER / 3CX SUPER SM
Operating weight	kg	7702 / 8135	7999 / 8435
Gross engine power	kW (hp)	68 (91) / 81 (109)	68 (91)
Dig depth (fix/ext)	ret/ext m	4.24 / 5.46	4.37 / 5.58
Steer mode		2WS	AWS
Loader shovel breakout	kgf	6531	6590
Maximum loader shovel capacity	m³	1.2	1.2
Maximum dipper tearout (fix/ext)	ret/ext kgf	6324 / 6228	6324 / 6228
Maximum bucket tearout (fix/ext)	kgf	3217 / 3225	3217 / 3225

3CX POTHOLE MASTER.

1. Extended reach

Your patch planer will be able to work a 10m² area at up to 115mm of depth without repositioning.

6. Saving time

A standard mechanical excavator quickhitch reduces attachment-changeover times.

5. Maximum protection

Both the road surface and your machine are well protected from potential damage, with streetpads fitted as standard.

2. Ease of use

Advanced EasyControl provides simple excavator-style control of the planer.

3. Sideshift

JCB's sideshift feature means you can plane the 3CX's full width without moving, allowing work to be carried out in a single coned-off carriageway.

4. Well positioned

Powerslide allows effortless repositioning of patch planers and other tools, with uncompromised visibility to the ground and the attachment. No risk to ground damage.

The powerful high speed drum cuts clean vertical sides to any planed area; this allows consistent compaction of new tarmac into the patch edges.



This machine can plane 10m² at up to 115mm in depth without repositioning.

A JCB sweeper collector dramatically reduces clean-up time and ensures a tidy, safe site for the general public.



Material can be loaded directly into a truck, ready for transport to a recycling facility.



Single carriageway operations means less disruption.

		3CX POT HOLE MASTER
Operating weight	kg	8102
Gross engine power	kW (hp)	68 (91) / 81 (109)
Dig depth	m	4.24 / 5.46
Steer mode		2WS
Rear attachment		Patch planer 400mm
Front attachment		Fully floating sweeper collector
Dump height	m	3.23
Road speed	mph (km-h)	25 (40)

4CX. ENGINE SIZE: 81kW DIG DEPTH: 14, 15ft AFTER TREATMENT: Adblue and SCR (No DPF)

1. Ultimate power

Comes standard with our highest engine power – 81kW providing high levels of productivity at all levels.

2. High floatation

28" tyres provide less ground damage and make it easier to travel over soft ground.

4. High ground clearance

Ideal for off terrain and heavy-duty applications.

3. Manoeuvrable

3 steer modes: 2 wheel steer, 4 wheel steer and crab steer provide excellent on-site manoeuvrability.

5. Two machines in one

The ideal machine offering wheeled loader and excavator performance in one machine.



Optional 1.3m³ shovel capacity along with 3 steering modes provide exceptional on-site productivity.



JCB's new multi-functional instrument control panel can provide current and average fuel consumption.



The steering ram is protected from impact damage because it is mounted behind the front axle.

		4CX	4CX SM	4CX SUPER	4CX SUPER SM	4CN
Operating weight	kg	8152	8599	8130	8880	8660
Gross engine power	kW (hp)	74.2 (100)	74.2 (100)	74.2 (100)	74.2 (100)	74.2 (100)
Dig depth	ret/ext m	4.32	4.32 / 5.53	4.98	4.98 / 6.14	5.191
Steer mode		4WS	4WS	4WS	4WS	4WS
Loader shovel breakout	kgf	6227	6590	6590	6590	6590
Maximum loader shovel capacity	m ³	1.3*	1.3**	1.3*	1.3**	1.3**
Maximum dipper tearout	ret/ext kgf	3893	3903 / 2729	3722 / 2675	3722 / 2675	3893
Maximum bucket tearout	kgf	6324	6324	6324	6324	6929

* GP Bucket ** 6-in-1 Bucket

4CX PILINGMASTER.

5. LED lights

Provide optimum coverage to the work area.

2. Hydraulically driven

Winch with automatic brake prevents over-winding of the wire rope.

3. Versatility

The Handheld Tool Circuit with hose reel can power a range of handheld hydraulic tools, such as breakers, pumps and disc cutters.

1. Attachments

Wide range of buckets and augers to suit all piling needs (up to 600mm in diameter).

4. Safety


Dipper cylinder limiter prevents over-extension and reduces risk of damage.



Less than 4m travel height ensures it complies with road regulations and easy site access.



JCB's ergonomic seat-mounted excavator-style servo controls make for great manoeuvrability, fingertip control and supreme comfort. A fully glazed cab provides excellent 360 degree all-round visibility.

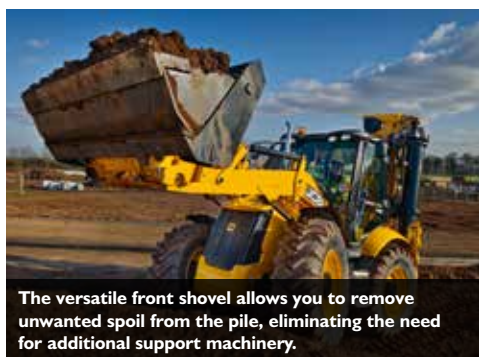

The versatile front shovel allows you to remove unwanted spoil from the pile, eliminating the need for additional support machinery.



JCB's Powerslide is fitted as standard, meaning that you can drill multiple piles from a single position.

		4CX PILINGMASTER
Operating weight	kg	11700
Gross engine power	kW (hp)	81 (109)
Dig depth	m	14
Steer mode		4WS
Loader shovel breakout	kgf	6590
Maximum loader shovel capacity	m ³	1.3
Maximum rotary head torque	Nm	12500
Auger / bucket diameter	mm	350 - 600

4CX POLEMASTER+.

1. JCB Rotaclaw bucket

Bucket that allows the operator to grab poles and dig holes.

5. Rear facing HHTC reel

Allows the operator to run hydraulic power tools at the rear of the machine.

4. Michelin Xeobib 600

Extra wide floatation tyres to minimise ground damage.

2. Autoglide auger

High torque auger which fits into the JCB Rotaclaw.

3. Side-mounted pole carriers

Allow the machine to carry two standard poles or one large stout in off-road applications



Mobile backhoe can cope with the most arduous terrain.



Easy and simple to manipulate poles up to 16m.



Ability to road to site at speeds up to 25mph (40kph).

		4CX POLEMASTER+
Operating weight	kg	11025
Gross engine power	kW (hp)	81 (109)
Dig depth ret / ext	m	1.98 / 6.14
Steer mode		4WS
Loader shovel breakout	kgf	6590
Maximum loader shovel capacity	m ³	1.3
Maximum dipper tearout	kgf	3903
Maximum bucket tearout	kgf	6324

5CX WASTEMASTER BACKHOE LOADER.

2. Safety is everything

Open a door while the 5CX Wastemaster is raised and an alarm will warn the operator to lower the machine before getting out.

3. Fuel efficiency

The specially designed all-JCB powertrain uses our EcoRoad technology to reduce fuel consumption by up to 25%.

4. All hooked up

Our standard-fit hooklift frame creates a stable, safe work platform and allows you to manoeuvre and reposition containers with ease.

1. Extensive excavation

A 7.10m excavator unit makes the most of this backhoe's extra working height, allowing you to move material around a container for optimum compaction and even loading.

5. Fully protected

The 5CX Wastemaster is designed to cope with any environment; it's got extra protection on the boom, lights and tyres.

6. Reaching new heights

We've extended the rear stabiliser legs to increase lift height by 400mm and provide optimum visibility into the container.



Heavy-duty arms can handle the rigours of a Civic Amenity site.



You can attach various loader attachments to clear up material spills quickly and easily.



The JCB Sweeper Collector is an efficient choice for keeping sites clean.



Liquid-filled tyres seal minor punctures easily for reduced downtime.



Extended stabiliser legs provide superb visibility into the container and around the site.



Anything can be in a day's work for the new JCB 5CX Wastemaster.

		5CX WM
Operating weight	kg	10600
Gross engine power	kW (hp)	81 (109)
Dig depth	ret/ext m	5.35 / 6.51
Steer mode		4WS
Loader shovel breakout	kgf	6590
Maximum loader shovel capacity	m ³	1.3
Maximum dipper tearout	ret/ext kgf	2675 / 3722
Maximum bucket tearout	kgf	6230

ATTACHMENTS.

JCB ATTACHMENTS ARE DESIGNED TO MEET THE EXACT REQUIREMENTS OF OUR MACHINERY FOR OPTIMUM PRODUCTIVITY. FROM BUCKETS TO SHOVELS, HANDHELD HYDRAULIC TOOLS, COMPACTION EQUIPMENT AND PATCH PLANERS, WE'VE GOT THE RIGHT ATTACHMENTS FOR ANY JCB BACKHOE LOADER YOU CHOOSE.

For added versatility, you can use your backhoe loader as a power source for a whole range of handheld tools.



Sweeper collectors.



Patch planers.



Earth drill.



Hammers.

		HAMMERMASTER HMI15	HAMMERMASTER HMI66Q	HAMMERMASTER HM266Q	HAMMERMASTER HM386Q	HAMMERMASTER HM496Q	EARTH DRILL
Weight	kg	110	162	224	329	480	105 + Flight
Carrier weight	t	45	2.0 - 4.5	2.8 - 6.0	4.5 - 9.0	6.0 - 12	2.0 - 8.0
Impact energy (published)	J	1.0 - 3.5	252	376	600	850	3500 - 6000 Nm Torque
Blow rate min - max	bpm	200	1020 - 1750	840 - 1400	600 - 1380	540 - 1250	N/A

		SWEeper COLLECTOR	PATCH PLANER	KERBMASTER	COMPACTOR	FORKS/FRAMES
Width	mm	1500 - 2400	400	N/A	305	75-125
Capacity	m³	0.37 - 0.4	N/A	180 kg	N/A	1 - 4 t per fork
Weight	kg	700 - 850	500	65 - 98	178	115

		GENERAL PURPOSE BUCKET	DITCH MAINTENANCE BUCKET	GENERAL PURPOSE SHOVEL	6-IN-1 SHOVEL	SIDE TIP SHOVEL
Width	mm	230 - 900	1200 - 1520	1850 - 2440	1850 - 2440	1850
Capacity	m³	0.028 - 0.2	0.12 - 0.18	0.45 - 1.1	0.16 - 1.3	0.62
Weight	kg	52 - 179	116 - 172	153 - 527	190 - 457	500

		RIBBED BUCKET	TAPER DITCH BUCKET	JAW BUCKET	TILTING GRADING BUCKET	SNOWBLADE
Width	mm	250 - 900	305 - 1676	24	1525	2290
Capacity	m³	0.04 - 0.12	0.06 - 0.1	0.2	0.16	N/A
Weight	kg	105 - 210	111 - 185	280	340	490

*Attachments suitability varies by machine model and specification.



LIVELINK, WORK SMARTER.

LIVELINK IS AN INNOVATIVE SOFTWARE SYSTEM THAT LETS YOU MANAGE JCB MACHINES REMOTELY – ONLINE, BY EMAIL OR BY MOBILE PHONE. ACCESS EVERYTHING FROM MACHINE ALERTS TO FUEL REPORTS AND HISTORY INFORMATION, WITH ALL DATA STORED AT A SECURE CENTRE.

Productivity and cost benefits

By providing information like idle time monitoring and machine fuel consumption, JCB LiveLink helps reduce your fuel usage, saving money and improving productivity. Machine location information can help improve efficiency and perhaps even reduce insurance costs.



Maintenance benefits

Manage machine maintenance easily – accurate hours monitoring and service alerts improve maintenance planning, while real-time location data helps you manage your fleet. Critical machine alerts and maintenance history records are also available.



Security benefits

LiveLink's real-time geofencing alerts tell you when machines move out of predetermined zones, and real-time curfew alerts inform you of unauthorised usage, straight to your mobile phone. Further benefits include real-time location information, and LiveLink has its own internal battery and aerial.



VALUE ADDED.

JCB'S WORLDWIDE CUSTOMER SUPPORT IS FIRST CLASS. WHATEVER YOU NEED AND WHEREVER YOU ARE, WE'LL BE AVAILABLE QUICKLY AND EFFICIENTLY TO HELP MAKE SURE YOUR MACHINERY IS PERFORMING TO ITS FULL POTENTIAL.




1 Our Technical Support Service provides instant access to factory expertise, day or night, while our Finance and Insurance teams are always on hand to provide fast, flexible, competitive quotes.

2 The global network of JCB Parts Centres is another model of efficiency; with 16 regional bases, we can deliver around 95% of all parts anywhere in the world within 24 hours. Our genuine JCB parts are designed to work in perfect harmony with your machine for optimum performance and productivity.



3 JCB Assetcare offers comprehensive extended warranties and service agreements, as well as service-only or repair and maintenance contracts. Irrespective of what you opt for, our maintenance teams around the world charge competitive labour rates, and offer non-obligation quotations as well as fast, efficient insurance repair work.

Note: JCB LIVELINK and JCB ASSETCARE may not be available in your region, so please check with your local dealer.

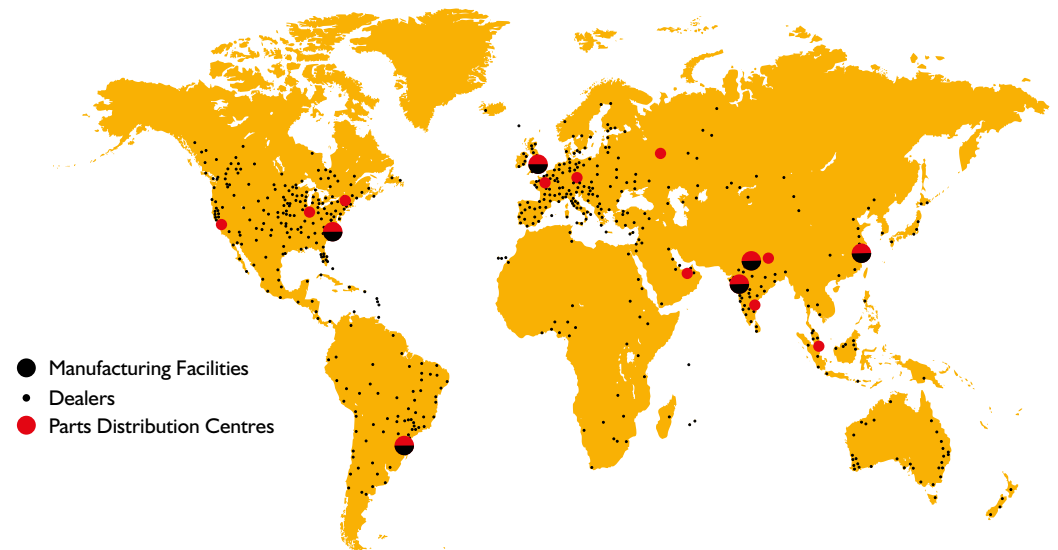







ONE COMPANY, OVER 300 MACHINES.

Your nearest JCB dealer

BACKHOE LOADER RANGE

JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP.

Tel: +44 (0)1889 590312 Email: salesinfo@jcb.com

Download the very latest information on this product range at: www.jcb.com

©2009 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. All images are correct at time of print. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

