

PS 819

Escalier passagers tracté – Towable passenger stair

L'escalier passagers tracté PS 819 permet aux passagers d'accéder aux avions dont les seuils de portes sont compris entre 2.05 m et 4.38 m.

The towable passenger step PS 819 allows passengers the access to the aircraft with door sills heights between 2.05 m and 4.38 m



Charge utile

- Totale :27 pers./ 2 025kg
- Marche :1 pers./ 75 kg
- Plate-forme: 8 pers./ 600 kg

Vitesses de tractage

- Position basse25 km/h
- Position haute5 km/h

Divers

- Herse hydraulique.
- Hauteur Mini 2.05 m
- Hauteur Maxi 4.38 m
- Garde au sol 0.20 m
- Poids à vide2 100 kg
- Stabilité au vent :
 - o 130 km/h en position basse
 - o 80 km/h en position élevée
- Garde-corps plate-forme coulissants
- Largeur des marches : 1,00 m
- Marches d'escalier tôle alu damier
- Bumper de protection en bout de plate-forme

Élévation volée

- Vérins hydrauliques actionnés par pompe à main

Déplacement et direction

- Train directeur orientable avec timon
- Roues à bandages 400 x 8

Freinage parking

- Par relevage ou abaissement du timon

Peinture

- 1 couleur blanc RAL 9010

Options

- Métallisation des structures avant peinture
- Eclairage volée
- Stabilisation par 2 vérins à commandes manuelles à l'avant.

Useful load

- Total27 persons/ 2 025 kg
- Step 1 person / 75 kg
- Platform8 persons / 600 kg

Towing speeds

- In lowered position 25 km/h
- In raised position 5 km/h

Main characteristics

- Hydraulic harrow
- Minimum height 2.05 m
- Maximum height4.38 m
- Ground clearance 0.20 m
- Empty weight 2 100 kg
- Wind stability
 - o 130 km in lowered position
 - o 80 km in raised position
- Platform sliding guard rails
- Step width 1,00 m
- Steps made of chequered aluminium sheet
- Protection bumper at platform end

Lifting of the flight of stair

- Hydraulic jack controlled by hand pump

Motions and direction

- Adjustable steering axle with tow bar
- Tired wheel 400 x 8

Parking braking

- By raising or lowering the tow bar

Painting



- 1 colour, white RAL 9010

Options

- Structure metallization before painting
- Lighting
- Stabilization by 2 jacks controlled by hand pump

PS 819

Escalier passagers tracté – *Towable passenger stair*

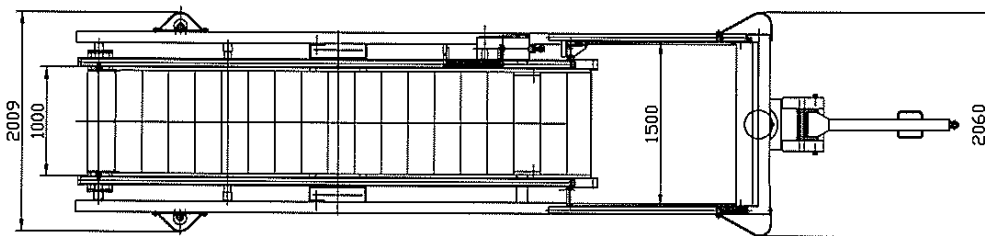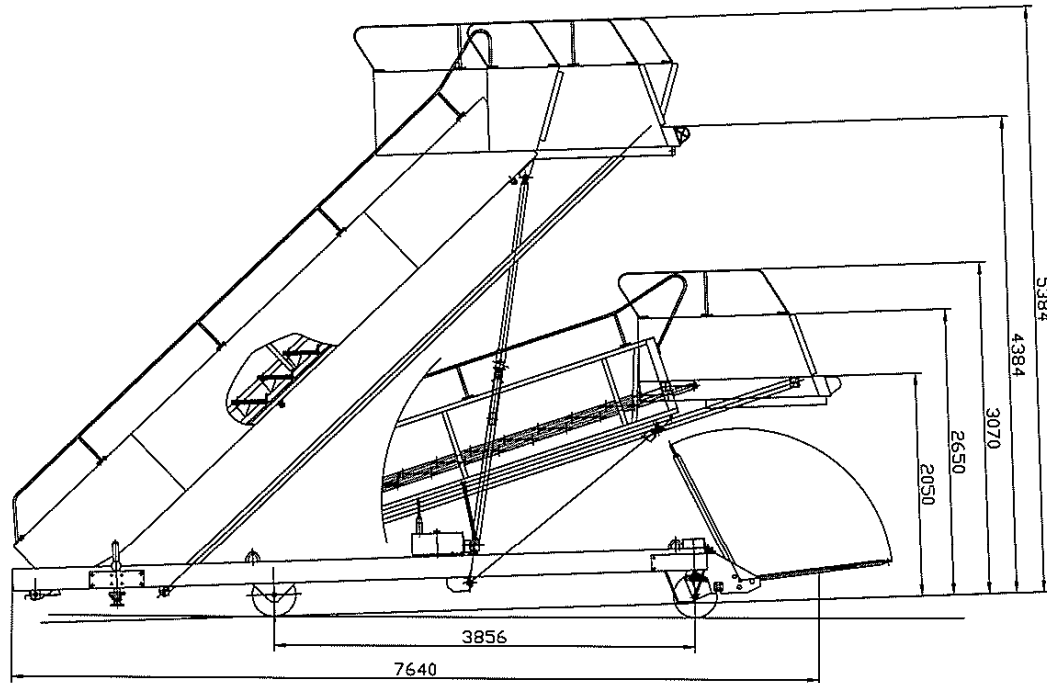

Colisage/ Packing dim L x l x H (mm)	Poids à vide/Weight (empty)
- 7500 x 2060 x 2650 Mains courantes démontées	2100 Kg
- 190 x 52 x 68 Without hand-rail	652 lbs



Complies with
regulations