

Change Point Control Procedure

Process 1	Initial Production Parts: IPP classification	Personnel resource	No designation
		Material resource	No designation

INPUT

The suppliers shall classify the information identified as change points into the control categories based on **Table 1** and shall follow the change control procedures according to the respective control categories.

In addition, the suppliers shall not be limited to the control category, but shall implement the following items, if applicable.

- Confirm quality of products before and after the change, if an unexpected change occurs
- When adopting a new material for coated products, verify its durability, adhesion, etc. by coating tests
- In the event of transferring production, provide the party to which the production is transferred with necessary information to carry on the same quality control items specified in standards

Table 1 Examples of IPP

No.	Classification	Item	Description
1	Specification change IPP	Specification change	- When changing based on notification of specification change.
2	Quality improvement IPP	Quality improvement	- When improving quality based on request from quality improvement instruction section.
3	Self-controlled IPP	New supplier	- Addition of a new supplier (including supplier's plant expansion). - Supplier change (including supplier manufacturing facilities). - Change of destination of delivery. - Change in manufacturing process from in-house to outsourced, or vice versa. - When changing the manufacturing site.
		Material change	- Material supplier change - Change of material such as HM-supplied material to self-procured material is made and vice versa. - Change of material not related to a specification change (including rust preventive oil, lubricant, etc.). - Change of material manufacturing process (including manufacturing location, factory, line, and condition, etc.)
		Change in process conditions or methods	- Change in method of casting or forging. - Change in sintering conditions (process, temperature, time, etc.). - Change in heat treatment conditions (temperature, time, heating method, cooling method, etc.). - Change in molding conditions for rubber and synthetic resin. - Change in welding conditions. - Change in cutting conditions. - Change in machining datum or setting method. - Change in plating, buffing or coating conditions. - Change assembly conditions.
		Process sequence change	- Consolidate, abolish or change in process sequence. - Change in process from temporary to permanent, or vice versa.
		Machine change	- Modify or repair of the machine. - A new machine is used. - When changing to mass production machine ⇔ alternative machine. - Machine is relocated. - When changing software such as programs.
		Jig and tool change	- Change in master sample for parts fabrication. - New or modified jigs and tools.
		Die / mold change	- Modification or renewal of dies / molds. - When changing to permanent mold ⇔ temporary mold.
		Inspection method change	- New or modified checking fixture or inspection equipment. - Change in measuring instruments or measuring criteria. - When changing inspection method, criteria, frequency, scope etc.
		Operator change (*)	- When a change in operator of critical process, which is particularly designated as a process requiring IPP control whenever operator change is made, occurs.
		Change in delivery method or delivery packaging	- Change in delivery and packaging methods and containers.

Operator change (*): Items require IPP control. Advance notice to Honda may not be required.

Supplier Quality Manual - Procedure

App. 10, 100

Process 2	Specification change IPP control	Personnel resource	Quality Assurance Representative, or Facility Quality Representative
		Material resource	No designation

INPUT

The suppliers shall implement the followings for changes classified as specification changes.

- a) Confirm the Application Change Instruction from Honda (the item requiring prior confirmation or immediate application to mass production)
- b) Perform fabrication, assembly and inspection of IPP to which a specification change is applied
- c) Take appropriate measures if any problem is found

The suppliers must submit the following items to Honda by the specified date for the changing point of specification change IPP, if prior confirmation is requested in the Application Change Instruction, but are not limited to the following:

- d) Inspection samples of the IPP
- e) Inspection data
- f) IPP tags

Honda determines applicability to mass production based on the result of the supplier's prior confirmation.

If the Application Change Instruction requires immediate application to mass production, the responsible person designated by the supplier shall determine whether the supplier can transition to mass production based on the results of fabrication, assembly, and inspection of the IPP to which the specification change has been applied.

In addition, the suppliers shall not omit the digits of the part number in order to correctly notify the details of changes.

Note
The suppliers who are instructed to operate the electronic data processing system shall submit the necessary information such as IPP tags and inspection data of the IPP in accordance with the operation manual issued separately.

Process 3	Quality improvement IPP control	Personnel resource	Quality Assurance Representative, or Facility Quality Representative
		Material resource	No designation

INPUT

The suppliers shall implement the followings for changes classified as quality improvement.

- a) Quality improvement based on request from Honda
- b) Perform fabrication, assembly and inspection of IPP for which quality improvement is implemented
- c) Take appropriate measures if any problem is found

In addition, the supplier shall submit IPP, inspection data and etc. to a quality improvement instructing section of Honda, then consult with Honda about how to proceed with the quality improvement IPP, etc. if necessary.

The responsible person designated by the supplier shall determine whether the supplier can transition to mass production based on the results of fabrication, assembly, and inspection of the IPP to which the quality improvement has been implemented.

Note
The suppliers who are instructed to operate the electronic data processing system shall submit the necessary information such as inspection data of the IPP in accordance with the operation manual issued separately.

Supplier Quality Manual - Procedure

IP-10-1-101

Process 4	Self-controlled IPP control	Personnel resource	Quality Assurance Representative, or Facility Quality Representative
		Material resource	No designation

INPUT

The suppliers shall implement the followings for changes classified as self-controlled IPP.

a) If any of the following changes are applicable, prior report to Honda using “Self-Controlled IPP Communication Form”

- Changes in the descriptions in Process Quality Control Table (I) and (II)
- Changes that correspond to the examples of self-controlled IPP listed in **Table 1**
- Changes that are deemed necessary by the responsible person designated by the supplier

b) Perform fabrication, assembly, and inspection of self-controlled IPP

c) Take appropriate measures if any problem is found

The suppliers shall implement the followings when reporting in advance by “Self-Controlled IPP Communication Form”.

d) Approval of the “Self-Controlled IPP Communication Form” by the responsible person designated by the supplier

e) Submission of the “Self-Controlled IPP Communication Form” to Honda at least 3 months prior to the start of the supplier's production
(In the case of sudden change points, submit the form as soon as they occur. In case of an urgent need, the suppliers shall contact Honda and follow the instructions)

f) Review the “Self-Controlled IPP Communication Form” returned by Honda and respond to instructions that include the follows:

- IPP items
- Number of inspection samples
- Time of submission

The responsible person designated by the supplier shall determine whether the supplier can transition to mass production with considering the followings.

g) Fabrication, assembly, and inspection results of self-controlled IPP

h) Items agreed upon on the “Self-Controlled IPP Communication Form” (if reported to Honda)

The suppliers shall also submit the determination result (with inspection results, etc., if necessary) to Honda.

Note
The suppliers who are instructed to operate the electronic data processing system shall submit a preliminary report and the results of mass production transition determination of IPP (with inspection results, etc. attached if necessary) in accordance with the operation manual issued separately.

Process 5	Mass production and release	Personnel resource	Quality Assurance Representative, or Facility Quality Representative
		Material resource	No designation

INPUT

The supplier shall start mass production of IPP which has been approved for mass production with considering the following control in addition to the procedures established by the supplier.

a) Comply with FIFO

b) Implementation of the follows for IPP (specification change IPP, quality improvement IPP, and self-controlled IPP that required attachment of IPP tag):

- Issue and attach an IPP tag to IPP
- Inspection data submission to Honda
- If there are more than one delivery locations, IPP tag shall be attached to each initial lot released for each of the locations
- In the case where an IPP lot is divided and delivered in multiple containers, attach a supplemental IPP tag to each container
- Handling of supplemental IPP tags shall be agreed with Honda (material service section) in advance, if necessary
- Consult with Honda (receiving quality section) on the number of (the range of) IPP tags to be attached, if necessary
(When the same IPP is used for multiple products, i.e. assembled into products of multiple types or variations)

c) Implement the follows when receiving supply products with IPP tag attached:


- Re-attach IPP tag to the initial lot when its release for ensuring traceability of the IPP
- When dividing the IPP lot of supply products, issue and attach a new IPP tag for each divided initial lot

The supply parts supplier shall provide supplier products users of information about IPP prior to transition to mass production.

Note
The suppliers who are instructed to operate the electronic data processing system shall issue IPP tags and submit inspection data in accordance with the operation manual issued separately.

Process 6	Manufacturing process control after transition to mass production	Personnel resource	Quality Assurance Representative, or Facility Quality Representative
		Material resource	No designation
INPUT			
The suppliers shall control the manufacturing process after the transition to mass production of IPP, considering the following.			
a) Monitor the process of IPP after transition to mass production for a period of one month, as a rule, focusing on the conformity of quality (Length of the monitoring period may be adjusted at the discretion of the responsible person designated by the supplier)			
b) Implement specified items by Honda (if specified)			

Flowchart: Specification change IPP

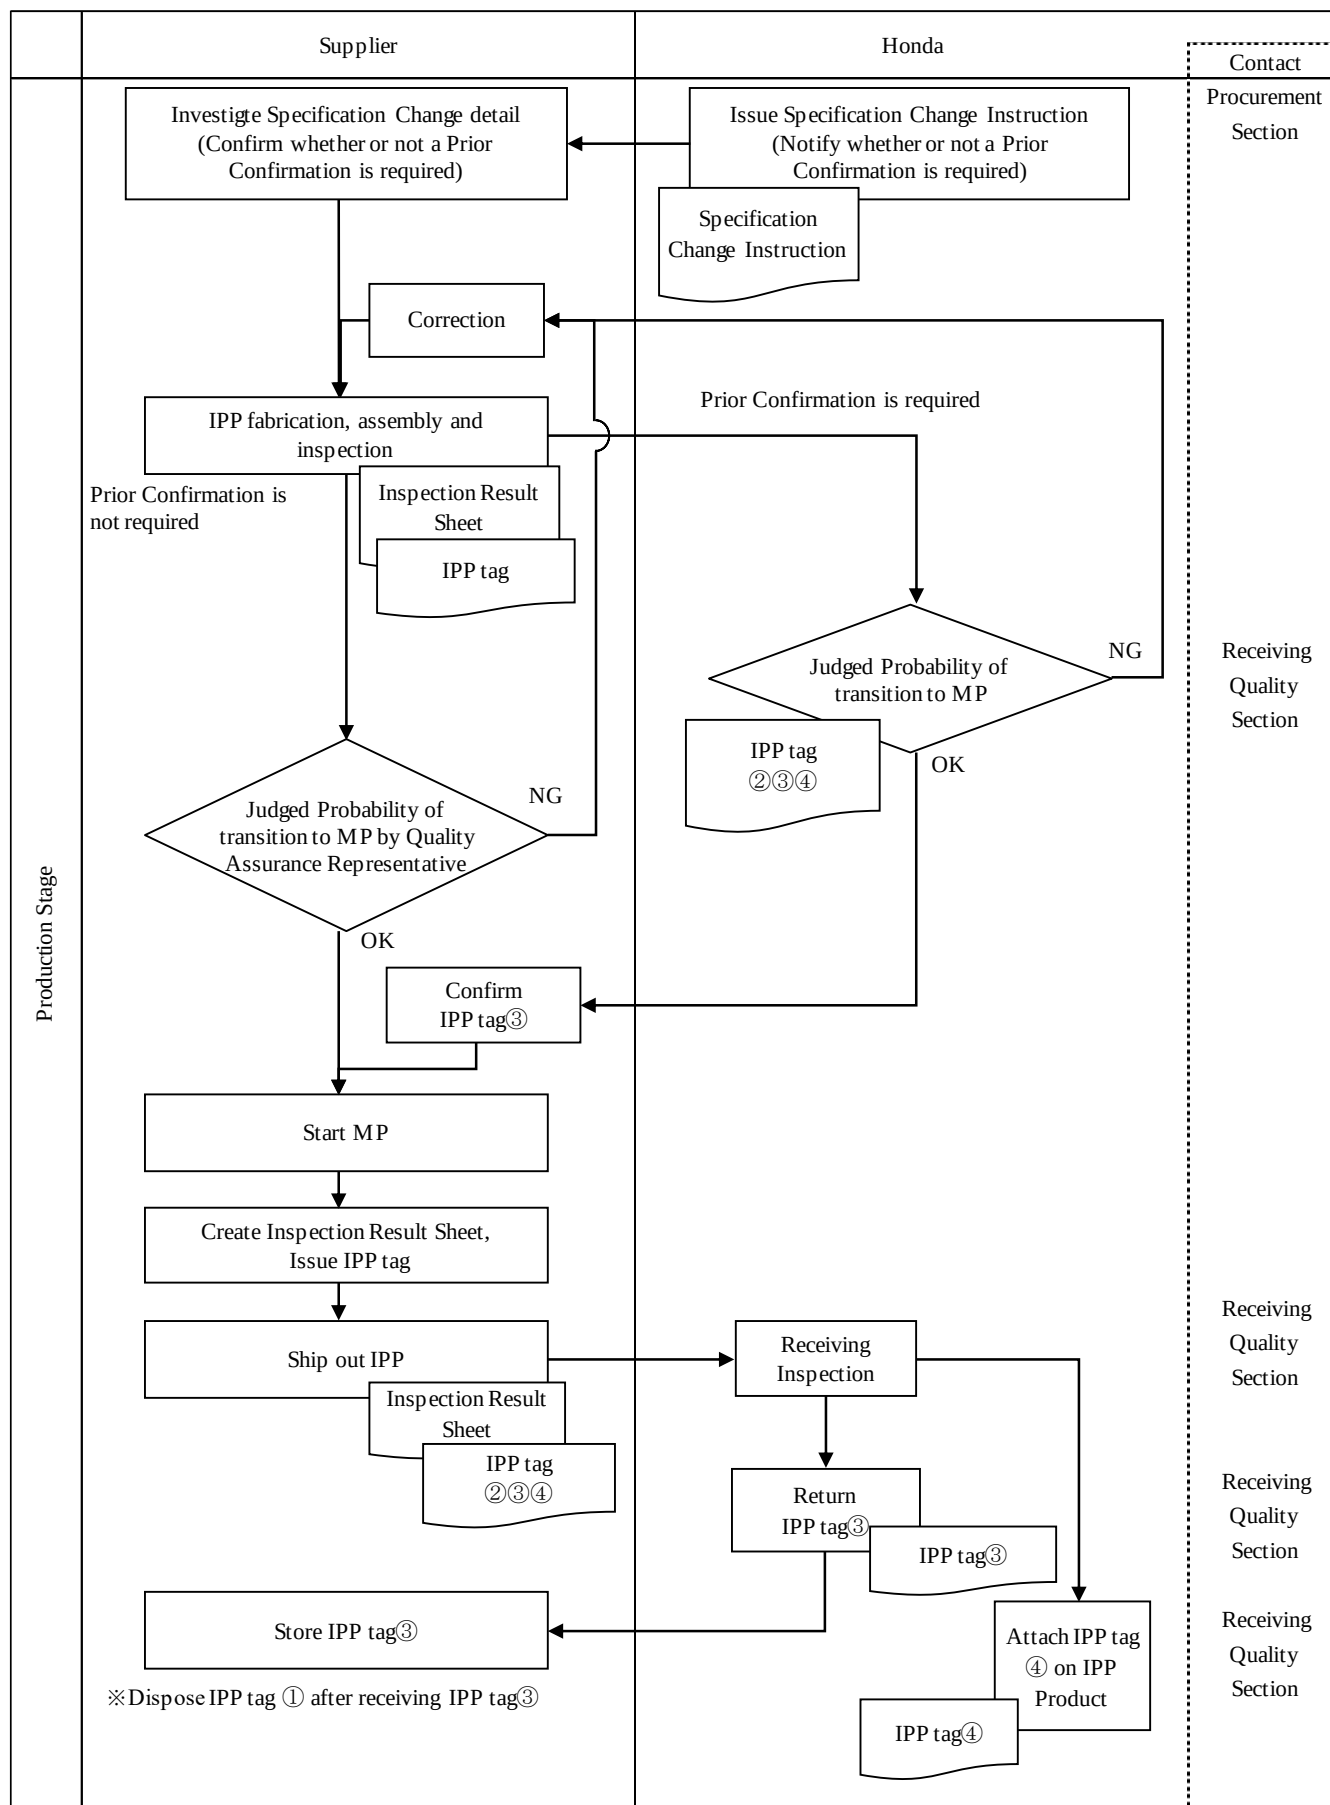

Flowchart: Quality improvement IPP

