AU OPTRONICS CORPORATION
Specification for Approval

INCOMING INSPECTION STANDARD FOR 27.0" TFT-LCD MODULES (A+ grade)
Model Name: G270HAN & G270QAN Series

Approved By	Prepared By
YenChun Fu	YH Chuang

General Display Business Unit/AU Optronics

Customer	Checked and Approved by

Revision History				
Rev.	**Date**	**Page**	**Old Inspection Spec**	**New Inspection Spec**
0	2017.Oct. 5	All		Preliminary Specification
1	2018 Jun. 7	All		Specification for Approval
2	2021 Jan. 20	All		New Format

The revised inspection criteria is effective before the expiration of the IIS as specified

1. Scope:

1.1 The incoming inspection standards shall be applied to TFT-LCD Modules (hereinafter called ""Modules"") that supplied by AU Optronics Corporation (hereinafter called ""seller"").

1.2 Specifications contains

- Electrical inspection specification
- Appearance specification

2. Incoming inspection:

The buyer (customer) shall inspect the modules within ninety calendar days since the delivery date (the ""inspection period"") at its own cost. The results of the inspection (acceptance or rejection) shall be recorded in writing, and a copy of this writing will be promptly sent to the seller.

The buyer may, under commercially reasonable reject procedures, reject an entire lot in the delivery involved. Within the inspection period,if the samples of modules within a lot show a number of unacceptable defects in accordance with this incoming inspection standards, the buyer must notify the seller in writing of any such rejection promptly, and not later than within three business days in the end of the inspection period.

Should the buyer fail to notify the seller within the inspection period, the buyer''s right to reject the modules shall be lapsed and the modules shall be deemed to have been accepted by the buyer.

The buyer (customer) shall sign the IIS back to AUO once the buyer verify the model completely and move to mass production stage. The seller(AUO) has right to follow internal sepcification or base on ES (engineeering sample) performance to the buyer If the buyer (customer) don't sign back to AUO.

3. Inspection sampling method:

Unless otherwise agree in writing, the method of incoming inspection shall be based on ANSI/ASQL Z1.4-2003.

3.1 Lot size: Quantity per shipment lot per model.

3.2 Sampling type: Normal inspection, single sampling.

3.3 Sampling level: Level II.

3.4 Acceptable quality level (AQL):

Major defect: AQL=1.0%.

Minor defect: AQL=2.5%.

4. Inspection instruments:

4.1 Pattern generator: LD-2000 or equivalent model.

4.2 Video board: AU video board or equivalent. The output of the signal should comply with the specification provided by AU.

4.3 Luminance colorimeter: Topcon BM-7 or equivalent model

5. Inspection environment conditions:

5.1 Room temperature : **20 ~ 25** C.

5.2 Humidity: **65±5**% RH.

5.3 Illumination: Fluorescent light (Day-Light Type) display surface illumination to be **300 ~ 700** lux. (standard **500** lux.)

5.4 To be a distance about **50 ± 5** cm in front of LCD unit and view angle should be **± 40°.**

5.5 G270HAN series white luminance set as 600cd/m2 when operating inspection.

5.5 Take off the protector of polarizer while judging the display area

5.6 If there is any question while judging, check the panel again while operating

6. Classification of defects:

Defects are classified as major defects and minor defects according to the degree of defectiveness defined herein.

Major defects:

A major defect is a defect that is likely to result in failure, or to reduce materially the usability of the product for its intended purpose.

Minor defects:

A minor defect is either a defect that is not likely to reduce materially the usability of the product for its intended purpose, or a departure from an intended purpose with little bearing on the effective use or operation of the product.

6.1 Electrical inspection specification:

No.	Inspection Item		Max. acceptable number / Distance	Unit	Note
1	Bright dots	1 dot	0	dot	1, 2, 6
2		2 Adjacent dots	0	pair	4, 5, 6
3		3 Adjacent dots	0	pair	4, 5, 6
4		Over 3 Adjacent dots	0	pair	4, 5, 6
5		Distance between bright dots	-	mm	3
6		Total (1+2+3+4)	0	pcs	
7	Dark dots	1 dot	5	dot	1, 6
8		2 Adjacent dots	2	pair	4, 5, 6
9		3 Adjacent dots	0	pair	4, 5, 6
10		Over 3 Adjacent dots	0	pair	4, 5, 6
11		Distance between dark dots	$\geq$ 15	mm	3
12		Total (7+8+9+10)	5	dot	
13	Bright dot and Dark dot	2 Adjacent dots	1	pair	4, 5, 6
14		Distance between dots	5	mm	3
15	Total amount of Dot Defects (1~13)		5	dot	
16	Small Bright dots	1 dot	5	pcs	1, 2, 6
17		Density	3	dot/ φ 20mm	3
18	Line defect		Not allowed	-	
19	Mura		Use 6% ND filter or judged by equivalent limit sample		6, 7, 8

Note 1) Definition of pixel and sub-pixel: refer to figure 1.

Fig.1

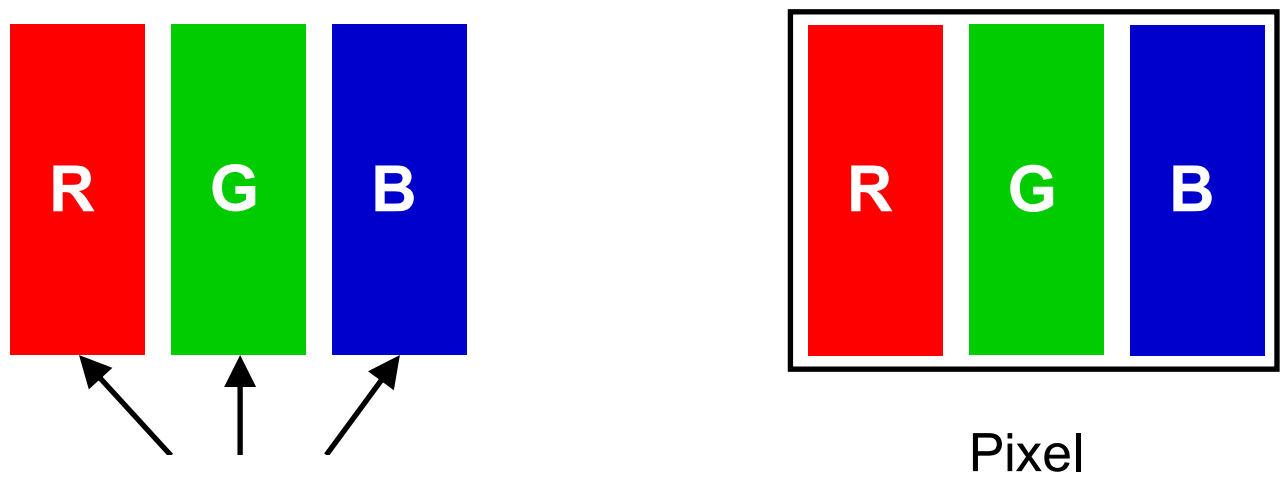

Sub-Pixel

Pixel

Note 2) Bright dot and Small bright dot judgment criteria:

Judgment Criteria		Bright Dot Defect area	
		＞1/2 sub-pixel	≦1/2 sub-pixel
ND filter 10%	Visible	Bright Dot	Small Bright Dot
	Invisible	Small Bright Dot	Small Bright Dot

The drawing of 1/2 area sub-pixel definition: The 1/2 area sub-pixel can be defined as below one or more of specific shapes (Fig.2).

Fig.2

Note 3) Definition of diameter φ as following:

Fig.3

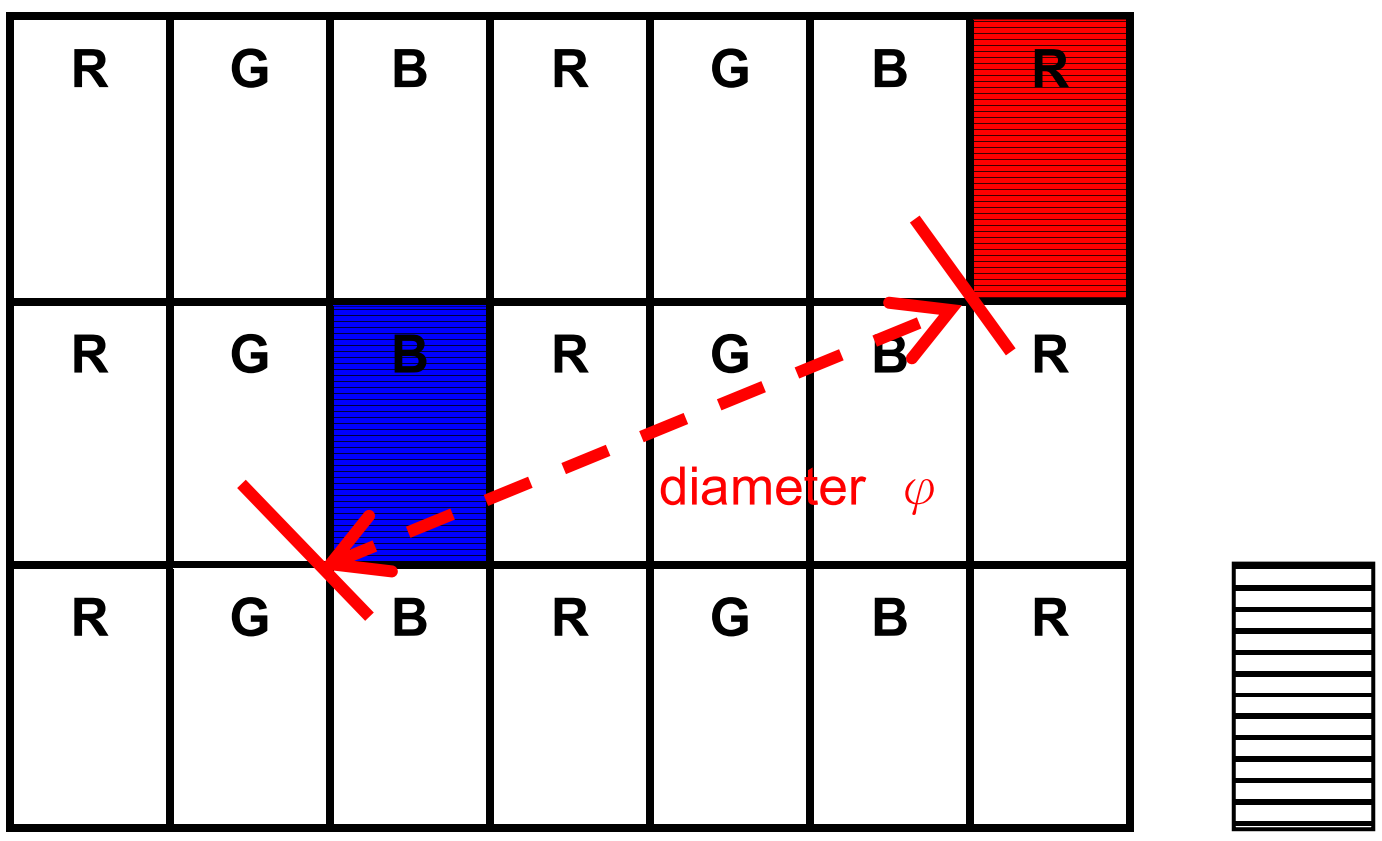

Note 4) Adjacent-dot defect should be observed under the same display pattern in any one of Black/Green/Blue/Red pattern.

Adjacent-dot defect : refer to Figure 4, dot 1,2,..,8 around A are all A's adjacent dots

Fig.4

Note 5) In three (or more) adjacent dot defect, for any 3rd dot that adjacent to 2 continuous defective dots (can be of any combination of bright dots and dark dots), the 3rd dot, no matter how large it may be, should be viewed as a dot.

Note 6) Inspection pattern: Standard inspection patterns of dot defect are listed below. AU uses these patterns as standard criteria for judging dot defect. Please inform AU if any other pattern is to be used to examine it.

Defect type	Inspecting Pattern
Mura/ display un-uniformity	L0/255、L92/255、L255/255
Bright Dot / Small Bright Dot	L0/255
Dark Dot	L255/255、Monotone Red、Green、Blue
BL particle/Scracth	L255/255
Polarizer particle/Scracth/Bubble	L0/255、L255/255

Note 7) Unless other specified written document or limit samples, Mura (display un-uniformity) should be inspected under the ND filter and be acceptable when it is invisible through ND filter.

ND filter use method: The inspection method of ND Filter - holding ND filter in front of the panel around 5 cm and examine the panel from **50±5** cm in the front view for **3** seconds. (Fig.5)

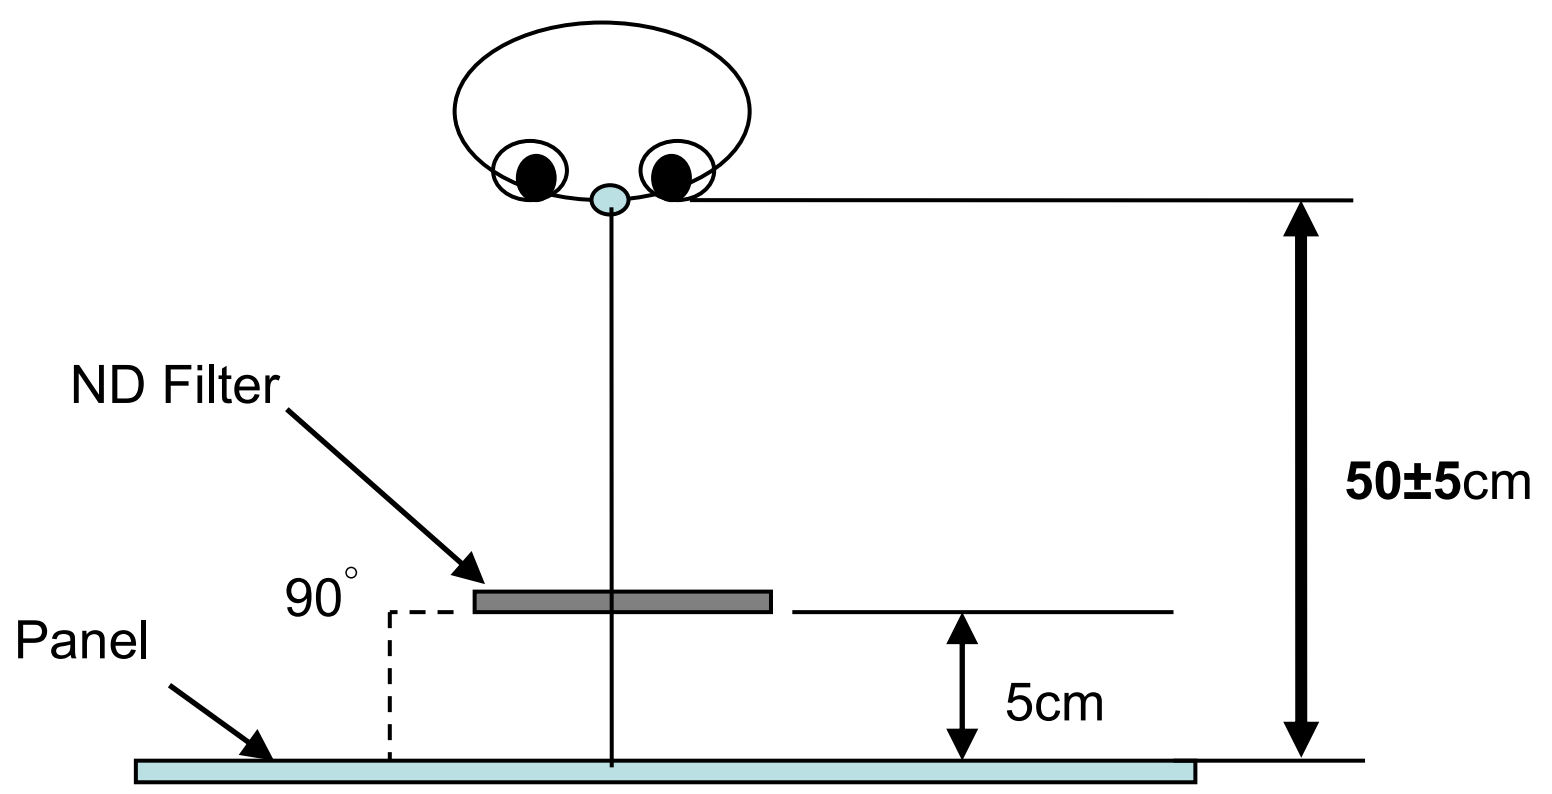

Fig.5

6.2 Scratches, dent, extraneous substances and Appearance inspection specification

<table>
<tr><th rowspan="2">Judge area</th><th rowspan="2" colspan="2">Judge item</th><th rowspan="2" colspan="2">Inspection specification</th><th colspan="2">Judge criterion</th></tr>
<tr><th>Major</th><th>Minor</th></tr>
<tr><td rowspan="9">Active area</td><td rowspan="9">Particles on the polarizer</td><td rowspan="4">Circular</td><td>Average diameter: D (mm)</td><td>Numbers</td><td rowspan="4"></td><td rowspan="4">○</td></tr>
<tr><td>D≦0.20</td><td>Disregarded</td></tr>
<tr><td>0.20＜D≦0.50</td><td>n≦3</td></tr>
<tr><td>0.50＜D</td><td>n＝0</td></tr>
<tr><td rowspan="5">Linear</td><td>Width: W (mm)
Length: L (mm)</td><td>Numbers</td><td rowspan="5"></td><td rowspan="5">○</td></tr>
<tr><td>「W≦0.07 and L≦ 2.0」or
「W≦0.10 and L≦ 0.3」</td><td>Disregarded</td></tr>
<tr><td>0.07＜W≦0.10 and 0.3＜L≦2.0</td><td>n≦3</td></tr>
<tr><td>0.10＜W or 2.0＜L</td><td>n＝0</td></tr>
</table>

	Scratch/Dent on the polarizer	Circular	**Average diameter: D (mm)**	**Numbers**		○
			D≦0.15	Disregarded		
			0.15＜D≦0.30	n≦4		
			0.30＜D	n＝0		
		Linear	**Width: W (mm)** **Length: L (mm)**	**Numbers**		○
			W≦0.05 and L≦ 2.0	Disregarded		
			0.05＜W or 2.0＜L	n＝0		
	Bubble on the polarizer	Circular	**Average diameter: D (mm)**	**Numbers**		○
			D≦0.50	n≦4		
			0.50＜D	n＝0		
	Extraneous substances	Circular	**Average diameter: D (mm)**	**Numbers**		○
			D≦0.20	Disregarded		
			0.20＜D≦0.50	n≦3		
			0.50＜D	n＝0		
		Linear	**Width: W (mm)** **Length: L (mm)**	**Numbers**		○
			「W≦0.07 and L≦ 2.0」 or 「W≦0.10 and L≦ 0.3」	Disregarded		
			0.07＜W≦0.10mm, 0.3＜L≦2.0	n≦3		
			0.10＜W or 2.0＜L	n＝0		
Bezel	Gap between front bezel and Polarizer on all sides	H ≦ 1.75mm (Note 11)				○
	Scratches, Warp, Sunken and Color Difference	1. No sharp burr/edge to cause safety issue. 2.The bezel defect to be accepted if it is not affecting display performance.				○
	Assembly Fail	Not allowed			○	
Label (S/N, B/L, WEEK)	No label	Not allowed			○	
	Upside Down				○	
	Content Error				○	
	Dirt	Word can be read. Barcode can be scanned.				○
	Not clear					○
	Font Deformation					○
	Label Broken					○
	Crease					○
	Label overlapping					○
	Position	Be attached on right position				○
Screw	Missing screw	Not allowed			○	
	Loose	Not allowed			○	
Connector	Appearance	As long as no function issues CN can be allowed.			○	

Note 8 : Extraneous substances which can be wiped out, such as fingerprint and particles are not considered as a defect.

Note 9 : Defects on the Black Matrix (outside Active Area 0.3mm) are not considered as a defect.

Note 10 : Defect size definition: (Unit:mm). When L≧2W, defect count as liner defect.

D: Average Diameter; L: Length W: Width

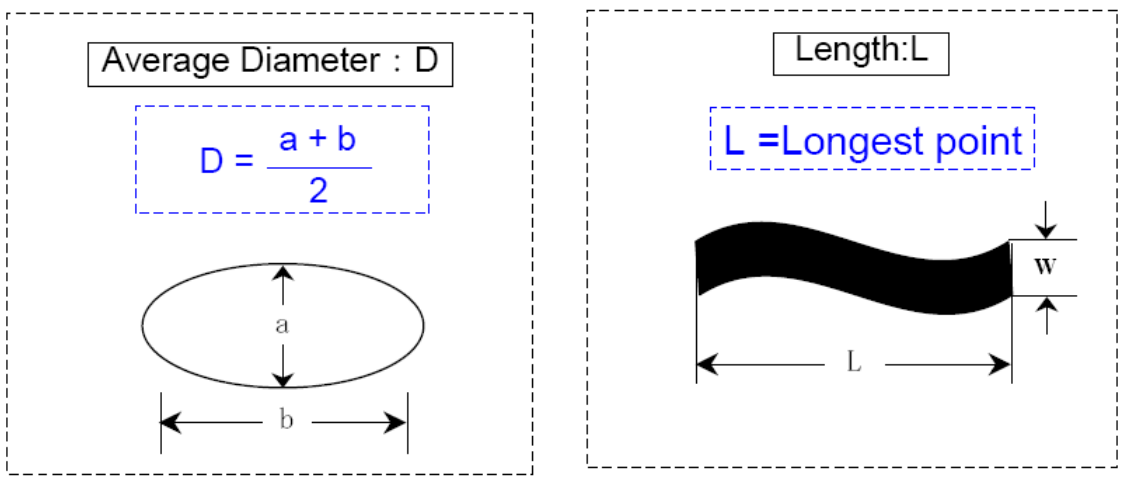

Fig.6

Note 11 : The gap between front bezel and Polarizer :

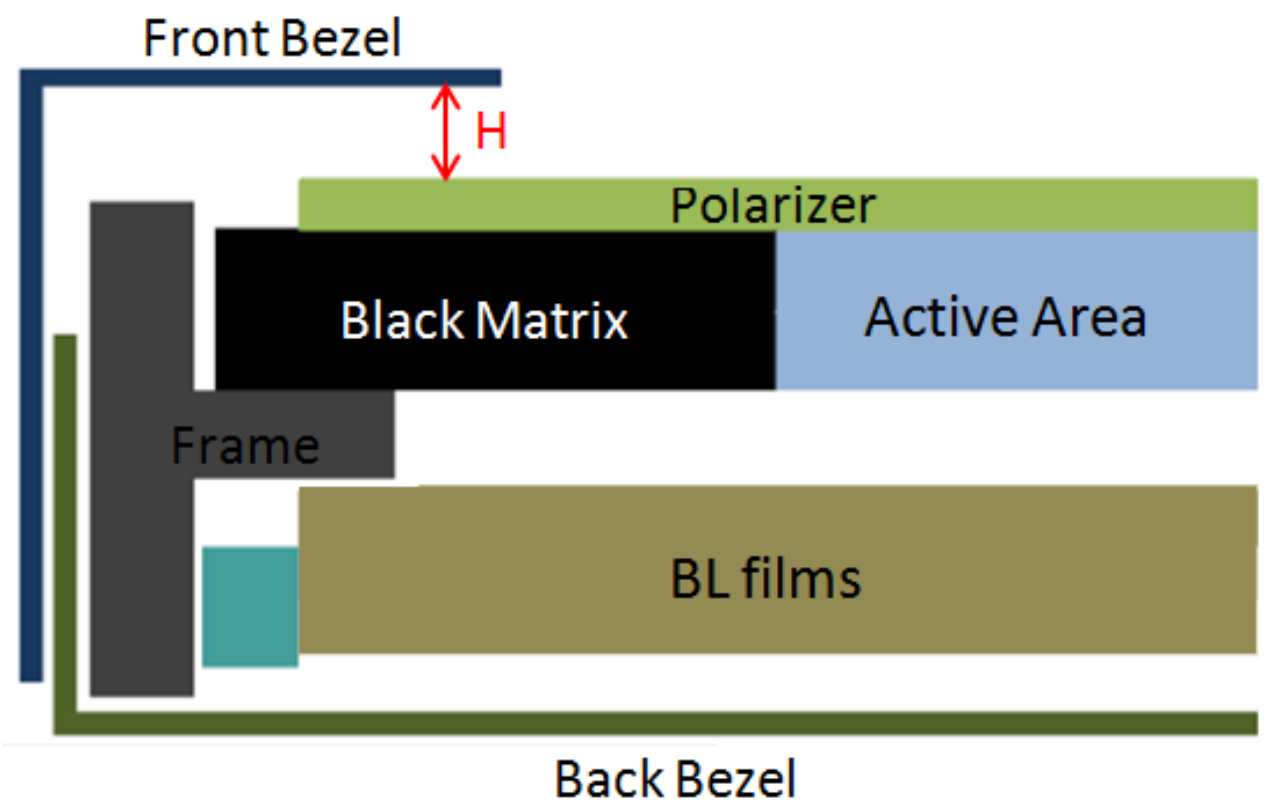

Fig.7

7. Inspection judgement:

7.1 The judgement of the shipped lot (acceptance or rejection) should follow the sampling plan of ANSI/ASQL Z1.4-2003, single sampling, normal inspection, level II.

7.2 If the number of defects is equal to or less than the applicable acceptance level, the lot shall be accepted.

7.3 If the number of defects is more than the applicable acceptance level, the lot shall be rejected and the buyer should inform the seller of the result of incoming inspection in writing.

8. Precaution:

Please pay attention to the following items when you use the LCD Module with back-light unit.

1. Do not twist or bend the module and prevent the unsuitable external force for display module during assembly.
2. Adopt measures in adequately ventilated environment. Be sure to use the module in the specified temperature range.
3. Avoid dust or oil mist during assembly.
4. Follow the correct power sequence while operating. Do not apply the invalid signal, otherwise, it will cause improper shut down and damage the module.
5. Try to avoid the electrical magnetic interference, and it will be more safety and less noise.
6. Please operate module in suitable temperature. The response time & brightness will drift by different temperature.
7. Avoid displaying the fixed pattern (exclude the white pattern) in a long period, otherwise, it will cause image sticking.
8. Be sure to turn off the power when connecting or disconnecting the circuit.
9. Display surface Polarizer scratches easily, please avoid dirt and stains carefully.

10. A dewdrop may lead to destruction. Please wipe off any moisture before using module.
11. Sudden temperature changes cause condensation, and it will cause polarizer damaged.
12. High temperature and humidity may degrade performance. Please do not expose the module to the direct sunlight and so on.
13. Avoid any acid or chlorine compounds, which are harmful to the LCD module.
14. Static electricity will damage the modules; please do not touch the module without any grounded device connected.
15. Do not disassemble and reassemble the module by self.
16. Do not touch the rear side directly to avoid the electrical shock by the backlight high voltage.
17. Avoid strong vibration or shock. or it will cause the module broken.
18. Store the modules in suitable environment with regular packing.
19. Be careful of injury from a broken display module. Please avoid the pressure adding to the surface (front or rear side) of modules, because it will cause the non-uniformity or other function issue to display.
20. Please softly tear the sticking tape of protective film to prevent bezel out of shape and un-uniformity display.

AUO Display Plus Corporation,
No. 1, Li-Hsin Rd. II,
Science-Based Industrial Park,
Hsin-Chu City, Taiwan, R.O.C.Tel : +886-3-563-1288