McMurdo Station, Ross Island

BUILDING INFORMATION SHEET

Chapel of the Snows

Location ID: B007

Single-story structure with a center high-bay nave flanked by offices on one side and by storage and furnace rooms on the other. Used as a non-denominational chapel and NSFA chaplain's office.



Photo 1: *Chapel of the Snows*

General Structure Information

Usage	Chapel (Chapel of the Snows)
Occupancy Group	A-3 Assembly
Maximum Occupancy	180 (verify with firehouse)
Construction Type	Type V, N, combustible; wood-framed structure sheathed with T-5 insulated plywood panels and horizontal ship-lap wood siding, wood-framed roof with plywood and sheet metal roofing, wood-framed floor. Interior partitions are wood-framed gypsum board.
Year Constructed	1989
Dimensions	40' x 52'20' x 4' Entry Vestibule
Floor Area	

Floor	Area
Floor 1	2,160 sq ft
Total	2,160 sq ft

HVAC System

Heating	One Jackson-Church forced-air oil burning unit (150,000 Btu/hr)

Air Handling Units	Fresh air intake has an electric duct heater.
Fuel Tank	300 gallon fuel tank

Water and Sewer

Water Service	2" stub off the 4" main
Sewer Service	4" stub off the 4" main
Connections	Sinks: 2 Toilets: 1 Urinals: 0 Showers: 0 Water Fountains: 0
Water Heater	6 gallon water heater located under the counter in the kitchen area.

Electrical Service

Service Feeder	Feeder B
Electrical Service	208/120V, 3PH, 225A Main

Fire System

Fire Panel Type	Pyrotronics System 3 control panel with Kingfisher KFRTI-WP-8 radio interface/ transmitter panel, heat and smoke detectors, pull stations.
Heat Detectors	Located throughout building
Suppression Type	Automatic dry-chemical fire extinguisher located in furnace room.

Floorplans

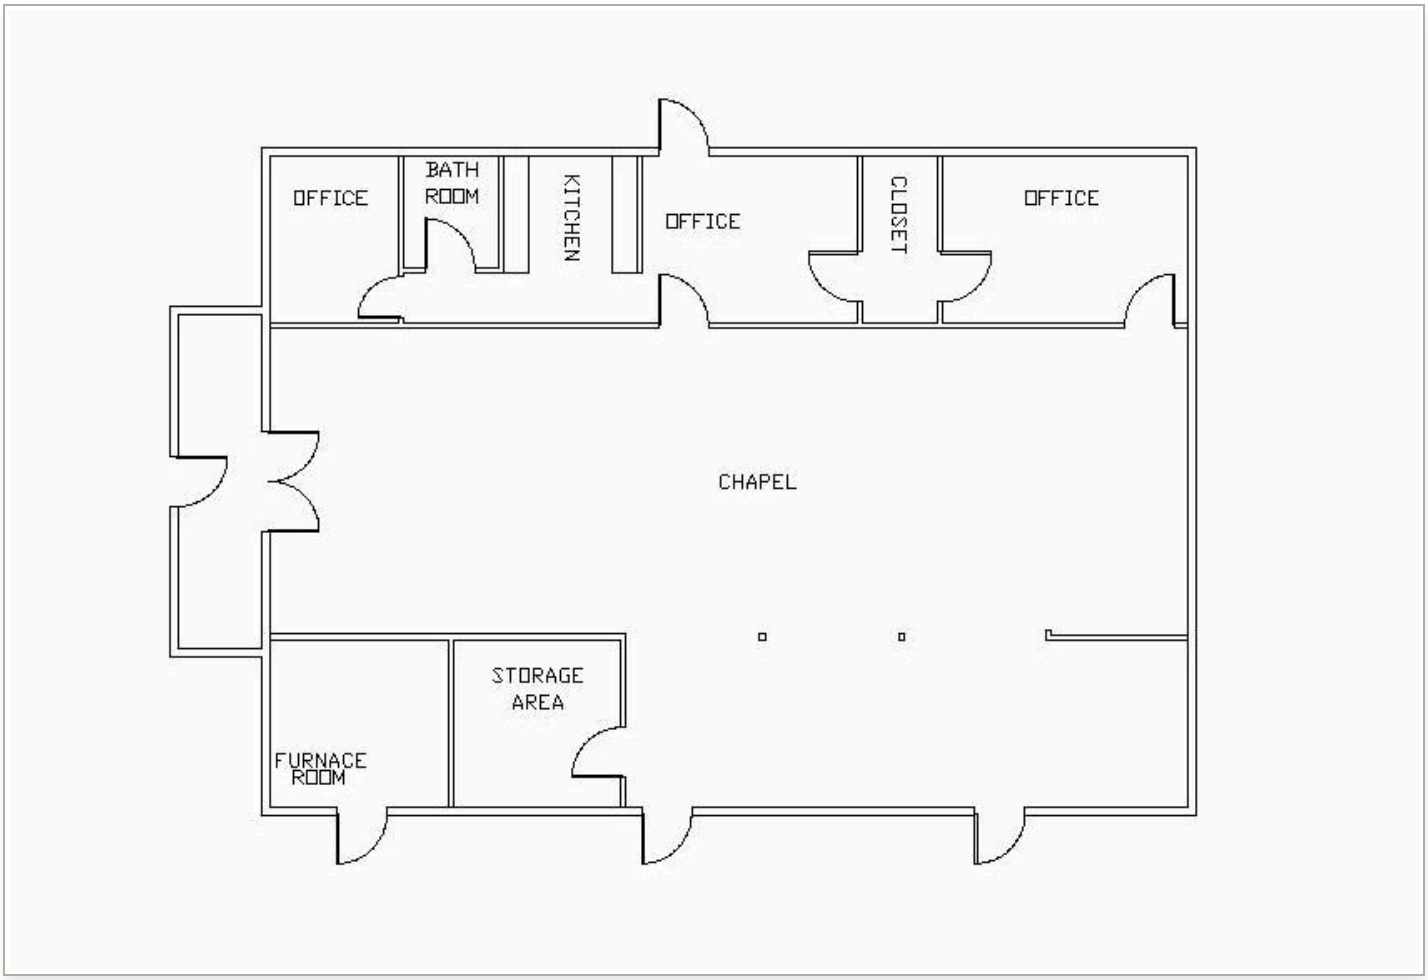


Figure 1: *Chapel of the Snows*