
Little Sun v.4

LittleSun GmbH

Results based on test procedures detailed in IEC 62257-9-5, ed. 3.0

Verify Online:

www.lightingglobal.org/products/ls-littlesun *Valid Until:* September 30, 2020

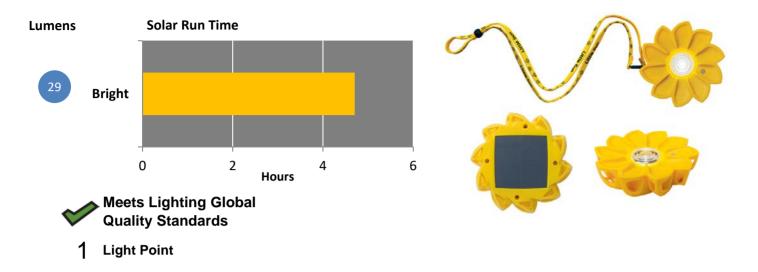

Warranty Information

2 year limited warranty includes the battery

Performance Details	
	Brightness Setting***
Performance Measure	Bright
Full battery run time* (hours)	4.7
Run time per day of solar charging* (hours)	4.7
Total light output (lumens)	29
Total area with illumination > 50 lux** (m ²)	
Total lighting service (lumen-hours / solar-day)	140

^{*} Run time estimates do not account for mobile phone charging or other auxiliary loads; the run time is defined as the time until the output is 70% of the initial, stabilized output.

^{***} Additional brightness settings (not tested): Dimmer

Lighting Details	
Lamp type	LED
Description of light points	One LED with transparent cover
Colour characteristics	CRI 81
	CCT "Cool" (3000-5000 K)
Distribution type	Wide
Lumen maintenance	87% of the original output remains after 2,000
	hours run time

^{**} Total area with illumination > 50 lux is determined by the maximum area with adequate illumination at a 0.75 m distance and at the distance from which the product would normally provide task lighting service.

Special Features		
LEDs	UV-free LEDs	
	10 1 1100 1110	
Enclosure	Made from UV-resistant plastic	
Battery	High-temperature battery	
Durchility		
Durability Overall durability and workmanabin	Door	
Overall durability and workmanship	Pass	
Durability tests passed	Drop test, switch and connector cycling, strain	
	relief test, physical ingress protection test.	
	Protection from frequent rain; meets IP44.	
Solar Details		
PV module type	Monocrystalline silicon	
PV maximum power point	0.58 watts	
F v maximum power point	10.56 Walls	
Battery Details		
Battery replaceability	Not easily replaceable with common tools	
Battery chemistry	Lithium iron phosphate	
Battery package type	1x 14500 cylindrical cell	
Battery capacity	421 mAh	
Battery nominal voltage	3.2 V	
Appropriate battery protection circuit	Pass	
Marks and Certifications		
Factory certification	ISO 9001	
Due des d'Artelle		
Product Details		
Manufacturer name	LittleSun GmbH	
Product name	Little Sun v.4	
Product model / ID number	V.4	
Contact information	business@littlesun.com	
Website	www.littlesun.com	
SSS Information	Contamb or 20, 2020	
Specs sheet expiration date	September 30, 2020	
Quality Standards Framework Version	2018	
Revision	2018.09	