
SS-1030

Stud & nut set M22 × 1.5 RH

Illustrative M22 stud and flange-nut pairing. Thread agreement does not establish nut-seat compatibility or fitment.


Type	Stud & nut set
Supplied as	Stud and nut
Thread	M22 × 1.5 RH
Finish	Clear (bright) zinc (visual finish; unconfirmed)

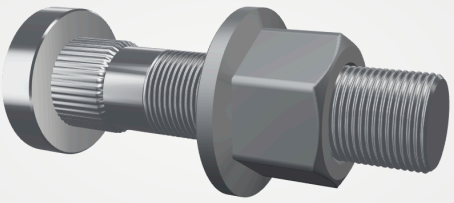

RENDER · VISUAL APPROXIMATION

Schematic geometry · not for manufacture or installation

Dimensions in mm · Not to scale · L includes head · L = H + K + S + T

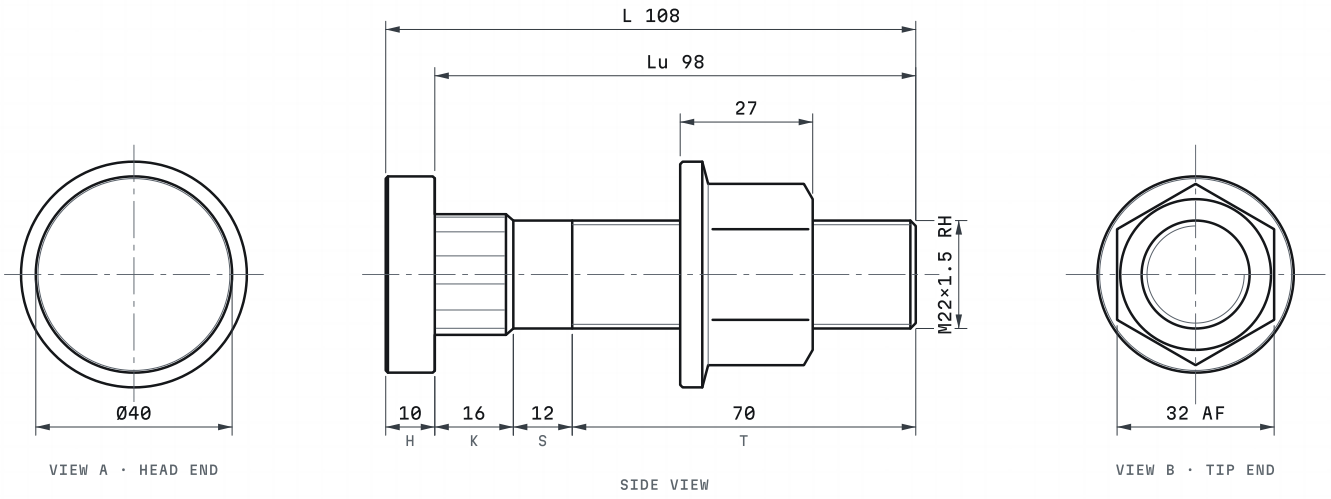

ILLUSTRATIVE DIMENSIONS (MM)

Overall length L (incl. head)	108
Length under head Lu	98
Head Ø × thickness H	40 × 10
Head form	Round
Knurl Ø × length K	24.6 × 16
Knurl splines	40
Shoulder Ø × length S	22 × 12
Threaded length T	70
Check: H + K + S + T	10 + 16 + 12 + 70 = 108

THREAD

Size	M22 × 1.5
Direction	Right-hand (RH)
Tolerance class	6g

ILLUSTRATIVE NUT PAIRING · SS-2002

Thread	M22 × 1.5 RH
Across flats	32 mm
Height	27 mm
Seat	Flat, Ø46 × 4.5 flange
Finish	Zinc-flake, silver
Clamp length shown (reference)	50 mm

IDENTIFICATION EVIDENCE

Status	Illustrative · identification pending

Assessment

108 overall/70 thread differs from GH118.5 overall/41 thread and Volvo115/77; shared M22 does not establish fitment or nut compatibility.

MATERIAL & FINISH

Material	Unverified
Property class	Unverified
Finish	Clear (bright) zinc (visual finish; unconfirmed)

EXAMPLE APPLICATIONS · CONFIRM FITMENT

Hino	500 Series	Unconfirmed	Rear · Unconfirmed
Volvo	FM / FH	Unconfirmed	Front & rear · Unconfirmed
Scania	P / G / R	Unconfirmed	Front & rear · Unconfirmed

INCLUDED

- 1 × Wheel stud M22 × 1.5 RH, L 108 (SS-1030)
- 1 × Flange nut M22 × 1.5 RH, 32 AF (SS-2002)

StudSport · [Street address], [Suburb], Harare
Tel +263 77 468 4534 · WhatsApp +263 77 468 4534 · [sales@studsport.example]
studsport.example/products/ss-1030

Illustrative prototype data. Verify specifications and fitment before use.