Project 03 - Remote Drive

Rev 1.1

Goal:

The course started with you evaluating the piRover using the Yahboom smart phone app. You will complete the course by implementing your own version of this controller.

In part 1, you will investigate the piRover Bluetooth module provided by the instructor. The module will provide message inputs to your application when a smart phone is connected and application buttons are pressed. You will use input and selection patterns developed in earlier lessons to decode the direction message and call functions from your piRover Drive module.

In part 2, you will work with the instructor to create additional modules to control the buzzer and the front servo. These modules will be integrated into your main remote drive application so that user presses will activate features.

Finally, in part 3, you will create an LED module on your own. This module provides the final functionality for the Yahboom smartphone application. Part 3 the final assessment for the course. An additional document will be provided. Do your best and do you own work. Do not assist others.

Prerequisites:

This assessment requires content and code solutions from the following:

Keyboard Drive

Performance Outcomes:

- 1. Create a solution using multiple modules
- 2. Interface with Bluetooth to enable remote drive.
- 3. Create a module to support buzzer operation
- 4. Create a module to support servo operation
- 5. Create a module to support LED operation

Resources:

1. See prerequisite lessons

Materials:

- 1. piRover
- 2. piRover_Bluetooth.py (provided)
- 3. piRover_drive.py (created during prior lesson)
- 4. Smart phone

Part 1 - Set Up

- 1. Prepare your workspace for this project.
 - a. Connect to your piRover using VNC. Access your piRover folder and launch VS Code.
 - b. Create a 12.RemoteDrive directory.
 - c. Create a new **remote_drive.py** file in the 12.RemoteDrive directory. This is the solution file for this project.
 - d. Locate the **piRover_drive.py** code in the 11.piRoverDriveModule directory. Copy this file the new 12.RemoteDrive directory.
 - e. Download the Bluetooth file into the solution directory.

 wget -O piRover_Bluetooth.py http://bit.ly/K2-piRover-bluetooth

Part 2 - piRover_Bluetooth Investigation

- 1. Create a new **bt_test.py** file in the solution directory.
- 2. Enter the following code to test the piRover Bluetooth interface and messaging.

```
You, seconds ago | 1 author (You)

1 ''' Test code for piRover Bluetooth
2 '''

3 import time
4 from piRover_Bluetooth import Bluetooth, Action
5

6 bt = Bluetooth()
7 while(True):
8 | action = bt.next_action()
9 print(action.name)
10 if action == Action.LED_OFF:
11 | break
12 time.sleep(.1)
13 print("Done")
14
```

- 3. Connect your smart phone to the piRover and run the test code.

 Note line 10 where the action value is checked for a specific value

 (Action.LED_OFF)
- 4. Open the piRoverBluetooth.py file and review the Action definitions. They are shown in Figure 1 on the following page for your reference. You will implement piRover code to respond to these user messages. (Note: OUTFIRE is not used.)

```
Class Action(Enum):

STOP = 0
FORWARD = 1
BACKWARD = 2
LEFT = 3
RIGHT = 4
LEFT_ALT = 5
RIGHT_ALT = 6

BEEP = 8
SPEED_UP = 9
SPEED_DOWN = 10
SERVO_LEFT = 11
SERVO_MID = 12
SERVO_RIGHT = 13
LED_OFF = 14
LED_RED = 15
LED_GREEN = 16
LED_BLUE = 18
OUTFIRE = 19
```

Figure 1- piRover Bluetooth Actions

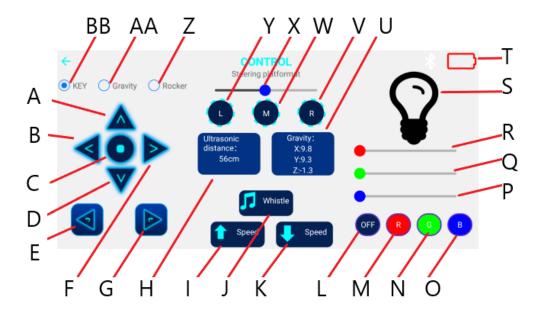


Figure 2 - Yahboom Smartphone App Interface

Part 3 - Bluetooth Drive

1. Open the piRover_Drive.py file and modify the init() function name to drive_init() as shown below. The renaming is required due to later modules also requiring an initialize function. Each must have a unique name to prevent "name collisions".

```
def drive_init(): ...

def forward(): ...

def backward(): ...
```

- 2. Review the keyboard_drive.py located in your prior lesson. The initial remote_drive.py solution for this project is almost identical to this solution except the input is captured from the piRover_Bluetooth module rather than the keyboard.
- 3. Enter the code in the remote_drive.py file that enables you to drive the piRover using the smart phone application. This requires code similar to the keyboard_drive reviewed in the prior step along with the Bluetooth integration demonstrated in Part 2.
- 4. You will need to decide on how left vs. left_alt and right vs. right_alt are implemented.

- 5. The requirements for the remote_drive.py file are:
 - a. Imports the piRover_Bluetooth module. See the example in Part2.
 - b. Imports the piRover_drive module. See your keyboard_drive solution.
 - c. Welcomes the user to the Remote Drive solution and specifies that the smart phone app must be installed and connected to Bluetooth.
 - d. Continually captures next actions from the Bluetooth module, selects appropriate move based on the action, and calls the require move method in the piRover Drive module.
- 6. Run, test, and debug your solution.

Part 4 - Bluetooth Buzzer

- 7. Add a piRover_buzzer.py module to your solution.
- 8. Implement the following member functions.

9. Complete the buzzer module by adding the required GPIO code. Ignore buzzer_beeps initially. This function requires that a PWM port is used. Get basic code functional and then add PWM pulse functionality as time permits.

- Integrate with the Remove Drive solution by importing the module and specifying the buzzer_beep function if the beep action is selected.
- 11. Run, test, and debug your code.

Part 5 - Bluetooth Servo

- 12. Add a piRover_servo.py module to your solution.
- 13. The instructor will present detail on servo control and assist with creating the required code that implements the servo functions below.

- 14. Integrate with the Remove Drive solution by importing the module and specifying the servo_left, servo_center, and servo_right functions if one of the servo actions is selected by the user.
- 15. Run, test, and debug your code.

Part 6 - Bluetooth LED

16. This section is the final assessment for the course. You will create an LED module on your own. An additional document will be provided specifying requirements. Do your best and do you own work. Do not assist others.

Part 7 - Project Extension

17. User a combination of keys or key timing to specify an exit condition for the application. Exit the application when the user enters this key combination. Timing should be used to distinguish an exit from a

normal combination of key presses. The instructor example uses multiple presses of the LED_OFF button to exit the application.

Evaluation

18. See the grading rubric on the following page.

	P03 - Remote Drive - Project Evaluation		
Section	Description 15 15 15 15 15 15 15 15 15 15 15 15 15	Points	Score
Main	Files remote_drive, piRover_Bluetooth, piRover_drive, piRover_buzzer, piRover_servo and piRover_led submitted in a zipped solution folder.	4	4
	Docstring identifies solution and file function. Name and date included.	2	2
	Solution imports required modules	4	4
	Solution calls initialization code required for each module.	4	4
	Solution welcomes user and specifies smartphone connection requirements.	2	2
	Solution continuously captures Bluetooth input.	4	4
	Solution call appropriate module function based on Bluetooth input.	4	4
	No Python syntax errors	2	2
	Valid logic and structure used. Runs as specified.	2	2
Drive	docstring identifies file solution.	2	2
	piRover drive contains required global constants and variables.	2	2
	drive_init initializes GPIO and PWM	4	4
	Motion functions provide basic drive moves	4	4
	Speed functions enable speed up and speed down	2	2
	No Python syntax errors	2	2
	Valid logic and structure used. Runs as specified.	2	2
Buzzer	docstring identifies file solution.	2	2
	piRover buzzer contains required global constants and variables	2	2
	buzzer_init initializes GPIO	4	4
	Buzzer functions implemented as defined	2	2
	Beeps function modifies initialization and functions as required	2	2
	No Python syntax errors	2	2
	Valid logic and structure used. Runs as specified.	2	2
Servo	docstring identifies file solution.	2	2
	piRover servo contains required global constants and variables	2	2
	servo_init initializes GPIO and PWM	4	4
	Servo functions implemented as defined	2	2
	No Python syntax errors	2	2
	Valid logic and structure used. Runs as specified.	2	2
LED	docstring identifies file solution.	2	2
	piRover LED contains required global constants and variables	2	2
	led_init initializes GPIO and global values	4	4
	LED functions implemented as defined	6	6
	LED toggle operation implemented as described	4	2
	No Python syntax errors	2	2
	Valid logic and structure used. Runs as specified.	2	2
Other	Bluetooth key combination causes program to exit	2	2
TOTAL		100	100

Submission:

- 1. Review the grading rubric on the prior page. Partial credit is awarded. Use comment lines to identify issues.
- 2. Zip your solution file folder with all required files.
- 3. Submit your zip file to the Moodle link by the deadline specified.