



SUREN NETWORK
PLAY WITH TECHNOLOGIES


SNCNA

SUREN NETWORK CERTIFIED NETWORK ASSOCIATE

DHCP CLI TEST

Write a command for this scenario ?

Enable dhcp on R1 for this two department

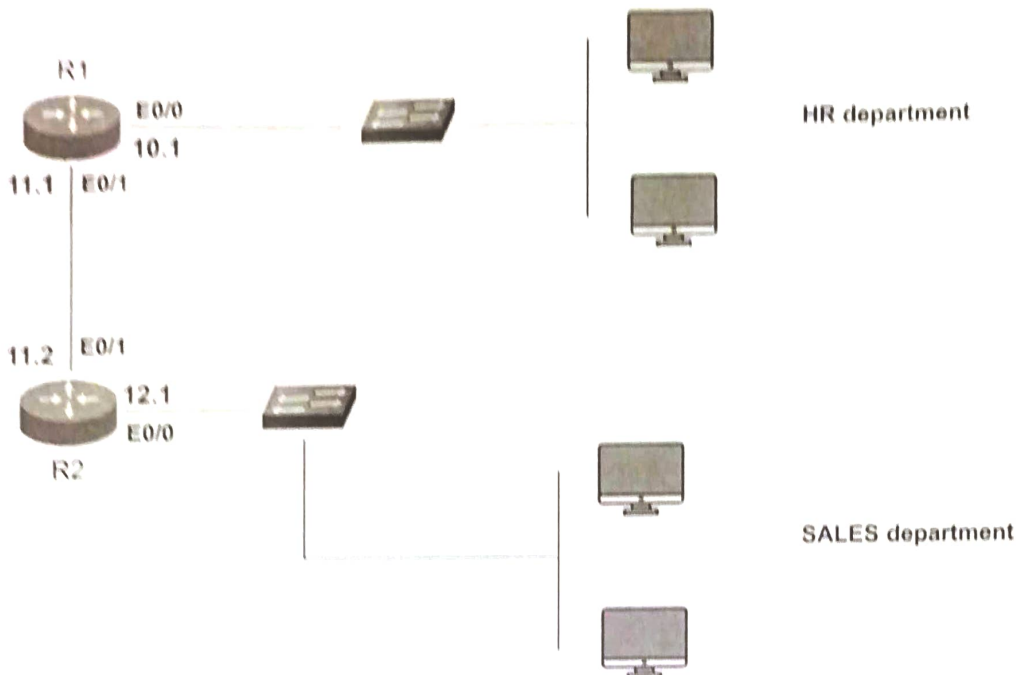

Command line interface

Step: 1

```

R1 > en
R1 # conf t
R1 (Config) int e0/0
R1 (Config-line) ip add 10.0.0.1 255.0.0.0
R1 (Config-line) no sh (no shutdown)
R1 (Config-line) ex
R1 (Config) int e0/1
R1 (Config-line) ip add 11.0.0.1 255.0.0.0
R1 (Config-line) no sh
R1 (Config-line) ex
R1 (Config) ip dhcp pool HR
R1 (Config-dhcp) network 10.0.0.0 255.0.0.0
    
```

```

R1 (Config-dhcp) default-router 10.0.0.1
R1 (Config-dhcp) dns-server 8.8.8.8
R1 (Config-dhcp) lease 1
R1 (Config-dhcp) ip excluded-address 10.0.0.1 10.0.0.10
R1 (Config-dhcp) ip dhcp pool SALES
R1 (Config-dhcp) return
R1 (Config-dhcp) ex

open Router 2 Step: 2
Assign IP
R2 (Config) int e0/0
    
```

R#(Config-line) ip add 12.0.0.1 255.0.0.0

" no sh

" ex

R#(Config) int e0/1

R#(Config-line) ip add 11.0.0.2 255.0.0.0

" no sh

" ex

Step 3:

open R1

" ip dhcp pool SALES

" network 12.0.0.0
255.0.0.0

" default-router 12.0.0.1

" dns-server 8.8.8.8

" lease 1 2

" ex

R#(Config) ip ^{dhcp} excluded-address
12.0.0.1 12.0.0.10

Step 4:

open R2

R#(Config) int e/0

R#(Config-line) ip helper address
11.0.0.1