

Nabd · نبض

Read where the network goes silent.


An AI agent that turns coordinated network silence into a live disaster-impact map for command centres — the impact map in the first minute, triage across the first 72 hours.

Theme 6 — Climate Resilience & Environmental Monitoring

Nokia Network-as-Code

Agent layer: LangGraph

Kadir's Team

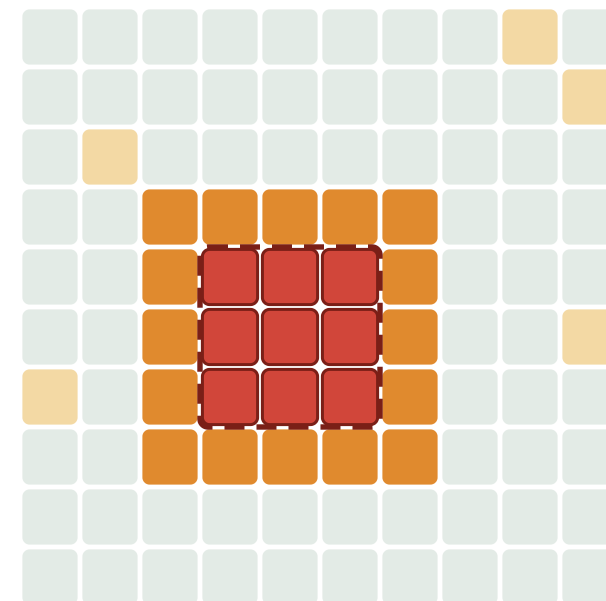

The first hours decide who is found alive.

53,000+

Kahramanmaraş, Türkiye
earthquakes, February 2023

~3,000

Al Haouz, Morocco
earthquake, September 2023

11,000+

Derna, Libya
dam collapse and flood, September
2023

In each of them, sensors confirmed *something* had happened within seconds.
Which neighbourhoods had lost their people — that map arrived hours late.

2024: Dubai and Oman floods. Same region, a different hazard, the same missing map.

Detection is solved. Impact is not.

SECONDS

Seismometers, satellites and phone-based systems say “**it happened**” almost instantly.

HOURS

“**Which district first?**” is pieced together from fragmented calls, social media and field reports — on a network that is overloaded at exactly that moment.

NABD IS NOT

early warning. Seismometers and existing alert systems own quake detection; we do not compete with them.

NABD IS

the **impact map in the first minute**, and **triage across the first 72 hours** — who is cut off, and where.

Silence is a sensor.

When a whole block of cells goes dark at the same moment, the network already knows where the disaster hit — before a single emergency call gets through.


1 An area goes **dark**: its cells stop answering.

2 The ring around it goes **hot**: everyone calls at once.


3 That pair, at the same instant, is a signature **no other event produces**.

Disaster-agnostic: earthquake, flood, storm, mass power outage — to the network they are the same thing, an area going silent.

Two layers. Detection is aggregate; triage is consented.

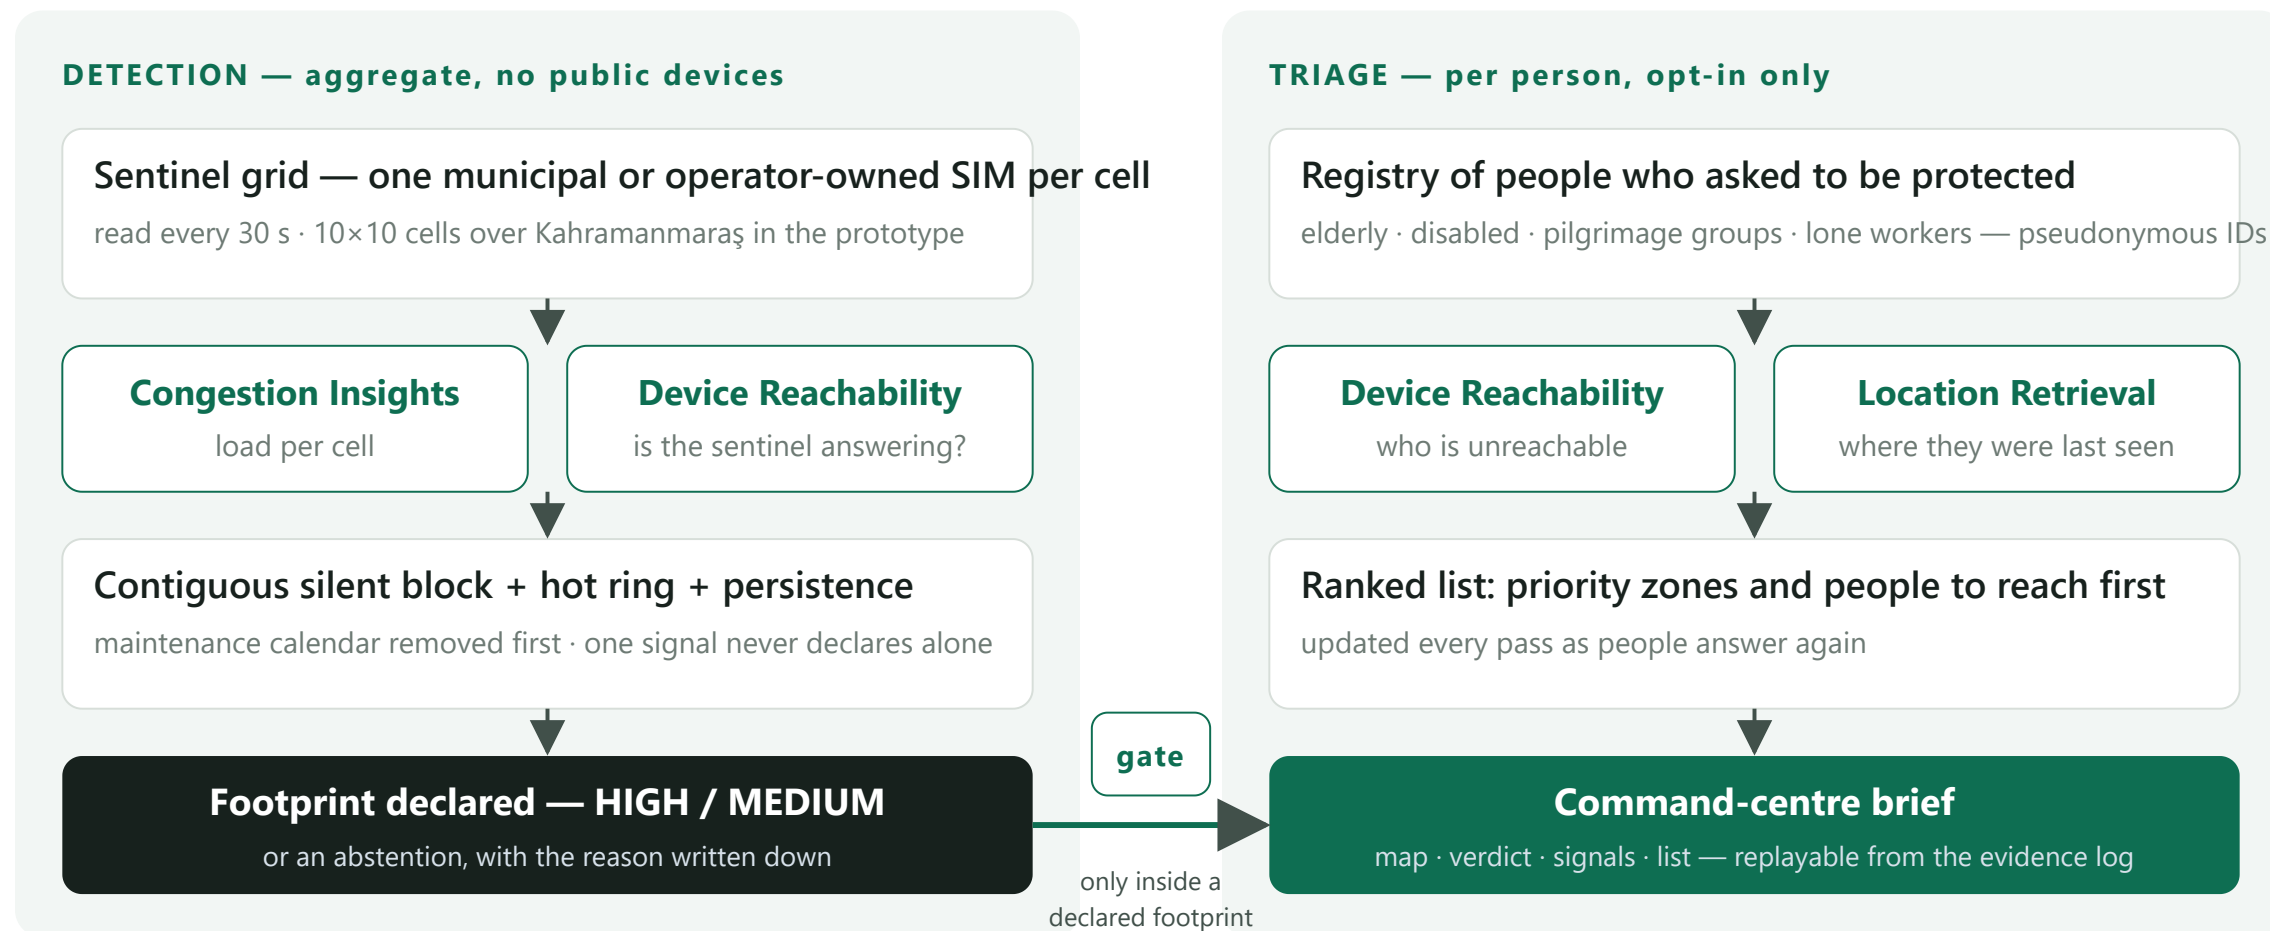

A block goes silent. The ring around it goes hot.

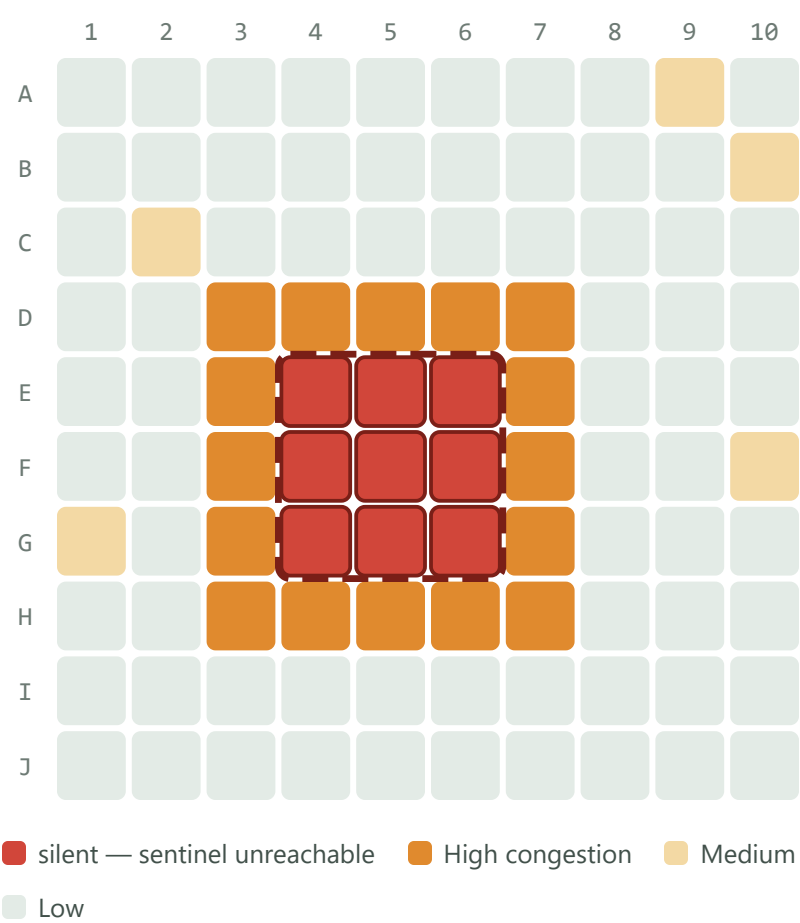

The grid is drawn from the evidence record of the declaring pass, not illustrated.

9 cells silent

E4 → G6, about 4.0 km². Their sentinels stop answering — *Device Reachability*.

16 / 16 ring cells at High

Everyone around the block is calling at once — *Congestion Insights*.


Onset synchronised

All nine went dark inside one 30-second window. A cell fault does not do that.

Persisted a second pass

Candidate at 09:02:30, declared at 09:03:00 — **55 seconds after onset**, confidence **HIGH**.

One signal never declares alone.

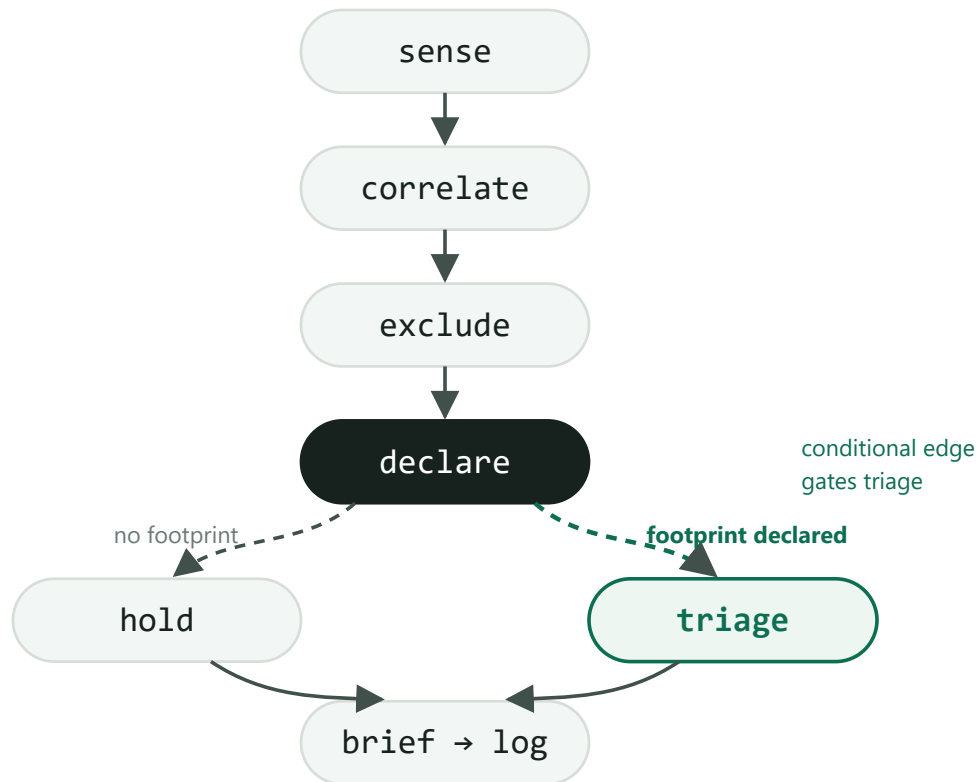

Corroborate before you speak. Silence is only the hypothesis. It must be backed by a synchronised onset or a hot ring, persist for a second pass, and survive the operator's maintenance calendar.

Grade the confidence. Two corroborations → HIGH. One → MEDIUM. None → abstain, with the reason written into the log.

Gate the personal layer. The conditional edge means no registry device is ever queried outside a declared footprint — a fuzzed test invariant, not a promise.

Keep the LLM off the control path. Detection is deterministic and replayable; the language model only writes the command-centre sentence.

A working agent, offline and live through one surface.

world · model	10×10 grid, 48-person opt-in registry, quake / cell-fault / peak events, maintenance calendar
gateway	one CAMARA surface, two backends — simulator (NaC vocabulary and shapes) and live via the Nokia SDK
detector	correlate → exclude → declare; pure functions, no framework import
triage · brief	reachability and last-seen inside the footprint only; the command-centre sentence
graph · loop	the LangGraph runner and the plain runner — same evidence, byte for byte
scene · console	three scenes; a self-contained command-centre console generated from the evidence

Runs on bare Python

no account, no server, no CDN — the demo cannot fail in the room

Same agent, live

`--backend live` makes the identical three calls through the Nokia SDK and records the raw exchanges

Two runners, identical

plain loop and LangGraph diffed byte for byte — 4,405 CAMARA calls

65 / 65 tests, 8 suites

incl. fuzzed invariants: no footprint without a contiguous block; no personal-device call outside a footprint

Declared 55 seconds after onset. Six people to reach first.

NABD · COMMAND CENTRE

scene: earthquake · pass 7 / 21 · 30 s cadence

09:03:00

DECLARE

HIGH

9 cells · ~4.0 km² · centred 37.5828N 36.9333E

- Device Reachability: 9 contiguous cells unreachable (~4.0 km²)
- Congestion Insights: no reading from 9/9 of those cells
- onset synchronised: all 9 cells went dark within 0s
- hot ring: 16/16 neighbouring cells at High congestion

registry 13 opted-in people inside · **6 unreachable**

R-010	elderly	F5	last seen 2 min ago · within 1301 m
R-022	elderly	G6	last seen 2 min ago · within 1474 m
R-007	pilgrim-group	E6	last seen 2 min ago · within 994 m

declared 09:03:00 — 55 s after onset


13 inside · peak 6 unreachable

21 passes · 4,405 CAMARA calls

evidence: nabd-scene-quake.jsonl

Later passes: footprint held; the list updates 6 → 4 as people answer again. Every element on the console is redrawn from the evidence log — the screen is a view over the record, never a second source of truth.


The agent does not cry wolf.



09:01:00 · SINGLE CELL

“single-cell silence at C3: one sentinel unreachable, neighbours normal — consistent with a cell fault, not an impact”


ABSTAIN



09:03:00 · MAINTENANCE

“4 contiguous cells silent, but the block matches maintenance ticket MNT-2214 — expected silence, no alert”

ABSTAIN



09:05:00 · STADIUM KICK-OFF

“congestion without silence: 9 contiguous cells at High but every sentinel answers — a crowd, not an impact”

ABSTAIN

Noise scene: 21 passes, three abstentions, **zero declarations** — each refusal with its reason in the log. The quiet scene stays quiet. Written reasons are what make a false alarm auditable and a true alarm trusted.

Remove the network APIs and nothing works. The network is the sensor.

API	ROLE	PROTOTYPE
Congestion Insights	detection — load per sentinel cell, the hot ring	live path
Device Reachability Status	detection (sentinels) and triage (registry)	live path
Location Retrieval	triage — last-seen position of the unreachable	live path
Geofencing Subscriptions	boundary events as the footprint grows or shrinks	roadmap
Quality on Demand	a priority channel for responders inside the footprint	roadmap

WHY CAMARA, NOT A CONTROL ROOM

An operator's NOC sees its own cells go down — from inside one operator.

Responders — civil defence, the Red Crescent, municipalities, hospitals — sit **outside**, and cannot log into three operators in the middle of a disaster.

Open Gateway is the **one standard door**: operator-independent, and it unifies every national operator behind a single interface. Stable since 2025, available on Network-as-Code today.

Live where it can be. Simulated where it must be. Private by design.

LIVE VS SIMULATED

The sandbox cannot stage a disaster. So the split is explicit: the **live platform proves the contract** with real, recorded calls; the **simulator stages the disaster** through the same code path, shaped on the public record of the 2023 Kahramanmaraş outage.

One gateway surface, two backends, identical agent code and identical evidence format.

PRIVACY

Detection reads only **sentinel devices the city or operator owns** — never the public.

Its output is **area-level**: cells and a footprint, not people. No cameras, no message content, no tracking.

CONSENT

Triage touches an individual only if they **opted in** to be protected.

The agency holds the registry; the operator honours it. IDs are pseudonymous, and **no location call is ever made outside a declared footprint**.

One engine, many hazards. Minutes, not hours.

IMPACT

Earthquake, flood, storm, mass outage — to the network each is an area going dark, so one engine covers them all.

The first dispatch decision moves from **hours to minutes**, and the most vulnerable are reached first.

SCALE

A sentinel grid scales by **cell count**; SIMs are municipal or operator-owned, so a national rollout is a procurement, not a behaviour change.

Open Gateway makes the same agent portable across operators and countries in the region.

BUSINESS

Buyers: civil-defence agencies (AFAD), Red Crescent societies, municipalities, hospital networks.

Seller: the operator, as an Open Gateway **impact-feed product** — a standing subscription for the grid, per-event triage on top.

ROADMAP Population Density Data as the detection upgrade once published on NaC · Geofencing for boundary events · QoD priority for responders inside the footprint · multi-operator fusion

The network already knows. Nabd makes it say so — in the first minute.

NEXT

Live contract run on Network-as-Code devices · pilot with one civil-defence agency on one city's sentinel grid · Population Density upgrade when published

TEAM

Kadir Can Yıldırım — Kadir's Team, solo builder, Türkiye. Code, evidence logs and the command-centre console are in the submission links.

See you in Doha — MWC Doha, November 2026.

