

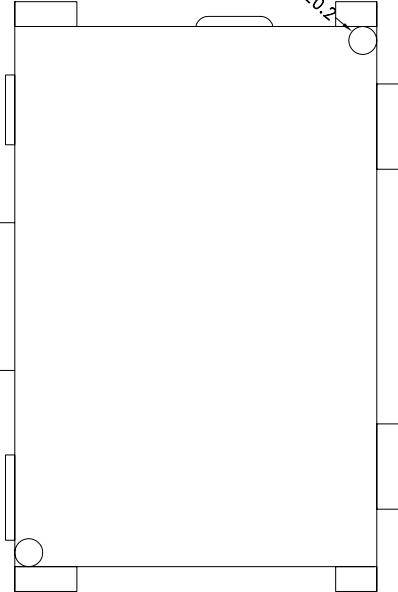



ISSUE	MODIFY DESCRIPTION	DATE

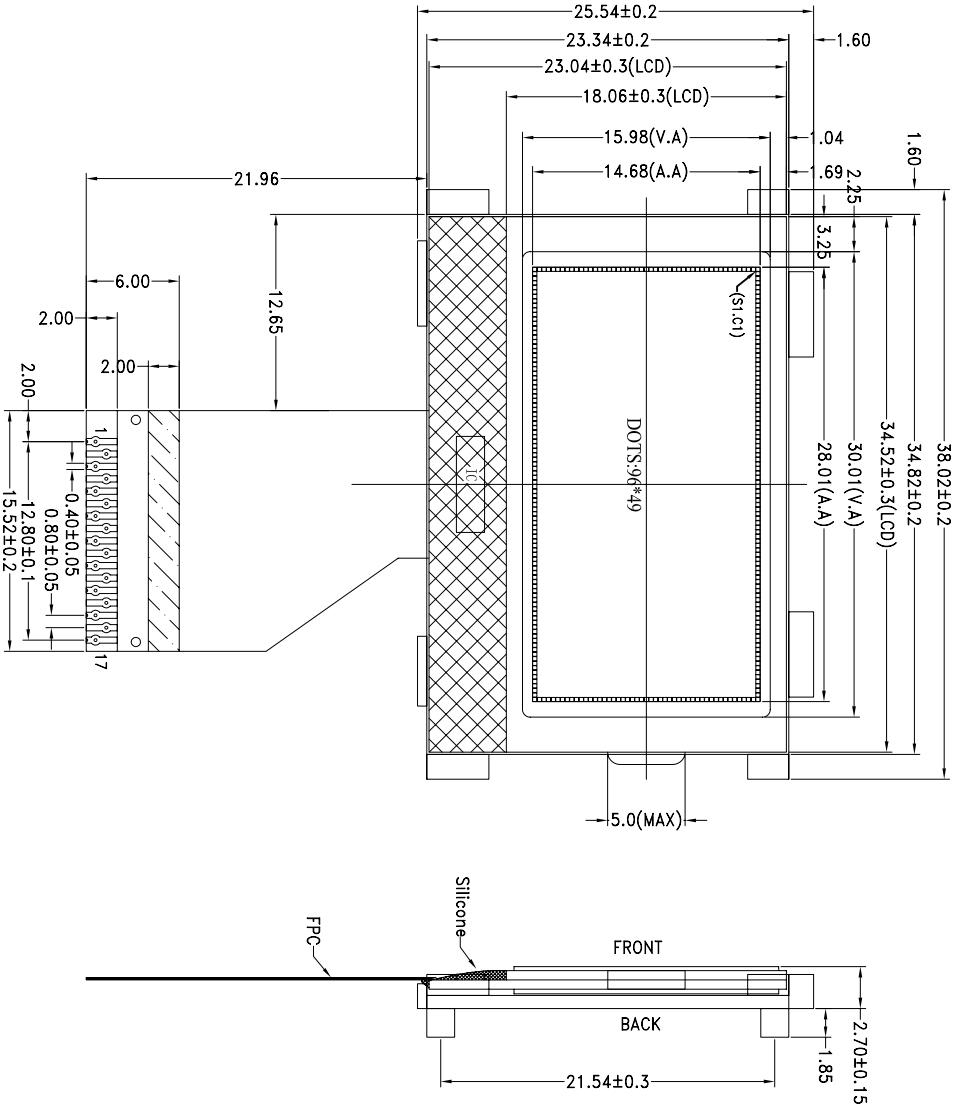


FPC ASSIGNMENT:

1	VB1+
2	VB1-
3	VB0-
4	VB0+
5	NC
6	VLCD
7	GND
8	VDD
9	SDA
10	SCL
11	GND
12	CD
13	RST
14	CS
15	GND
16	NC
17	NC



Display Type	ESTN / TRANSFLECTIVE/ POSITIVE
Display Resolution	DOTS:96*49
Viewing Angle	6:00
Max.Ratio and Bias Level	1/49 DUTY,1/7 BIAS
LCD Controller/Driver	UC1701(COG)
Logic Voltage	3.3V
LCD Driving Voltage	TBD
Operation Temperature	-10° C TO 70° C
Storage Temperature	-20° C TO 80° C
Backlight Specialty	-
Remark	Internal Resistor



TITLE: Module Specialty			
ITEM NO:			
PROJECT NO:		G9649A01-01	
DESCRIPTION:			
TOLERANCE UNLESS:		X.X±0.3	
OTHERWISE SPECIFIED:		X.XX±0.2	
THIRD ANGLE PROJECTION			
DRAWN		NAME	SIGN DATE
CHECKED			
APPROVED			
REV: A	UNIT: mm	SCALE:1/1	SHEET: 1 OF 1