



Lenovo 4XB7A10202 internal solid state drive 1 TB 2.5" U.2 NVMe 3D TLC

Brand : Lenovo Product code: 4XB7A10202 Product name : 4XB7A10202


ThinkSystem U.2 Intel P4510, 1 TB, Entry NVMe, PCIe3.0 x4, Hot Swap, SSD

Lenovo 4XB7A10202 internal solid state drive 1 TB 2.5" U.2 NVMe 3D TLC:

The ThinkSystem Intel P4510 Entry NVMe SSDs are general-purpose yet high-performance drives with a PCIe 3.0 x4 interface. They are designed for greater performance and endurance in a cost-effective design, and to support a broader set of workloads.

The Intel P4510 SSDs are based on Intel-developed controller, firmware, and 64-layer TLC Intel 3D NAND technology. Rigorous qualification and compatibility testing by Lenovo ensures a highly reliable SSD. Lenovo 4XB7A10202. SSD capacity: 1 TB, SSD form factor: 2.5", Read speed: 2850 MB/s, Write speed: 1100 MB/s, Component for: Server/workstation

Features		Features	
Security algorithms	256-bit AES	Certification	FCC Title 47, Part 15B, Class B CA/CSA-CEI/IEC CISPR 22:02 EN 55024: 1998 EN 55022: 2006 EN-60950-1 2nd Edition UL/CSA EN-60950-1 2nd Edition Low Voltage Directive 2006/95/EC C-Tick: AS/NZS3584 BSMI: CNS 13438 KCC Article 11.1 RoHS DIRECTIVE 2011/65/EU WEEE Directive 2002/96/EC
SSD capacity *	1 TB		
SSD form factor *	2.5"		
Interface *	U.2		
NVMe *	✓		
Memory type *	3D TLC		
Component for *	Server/workstation		
Hardware encryption *	✓		
Read speed	2850 MB/s	Power	
Write speed	1100 MB/s	Power consumption (read)	10 W
Random read (4KB)	465000 IOPS	Power consumption (write)	10 W
Random write (4KB)	70000 IOPS	Weight & dimensions	
PCI Express interface data lanes	x4	Width	70 mm
Hot-swap	✓	Depth	100 mm
End-to-End Data Protection	✓	Height	15 mm
Uncorrectable Bit Error Rate (UBER)	< 1 per 10^17 bits read	Weight	139 g
Mean time between failures (MTBF)	2000000 h	Operational conditions	
		Operating temperature (T-T)	0 - 70 °C
		Operating relative humidity (H-H)	5 - 90%
		Operating vibration	2.17 G
		Operating shock	1000 G
		Maximum operating altitude	3048 m
		Logistics data	
		Harmonized System (HS) code	84717070

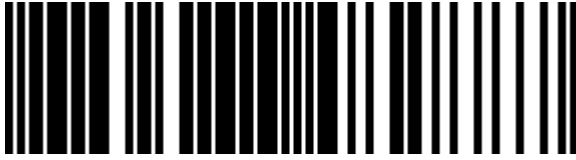

0889488482887



889488482887

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.