


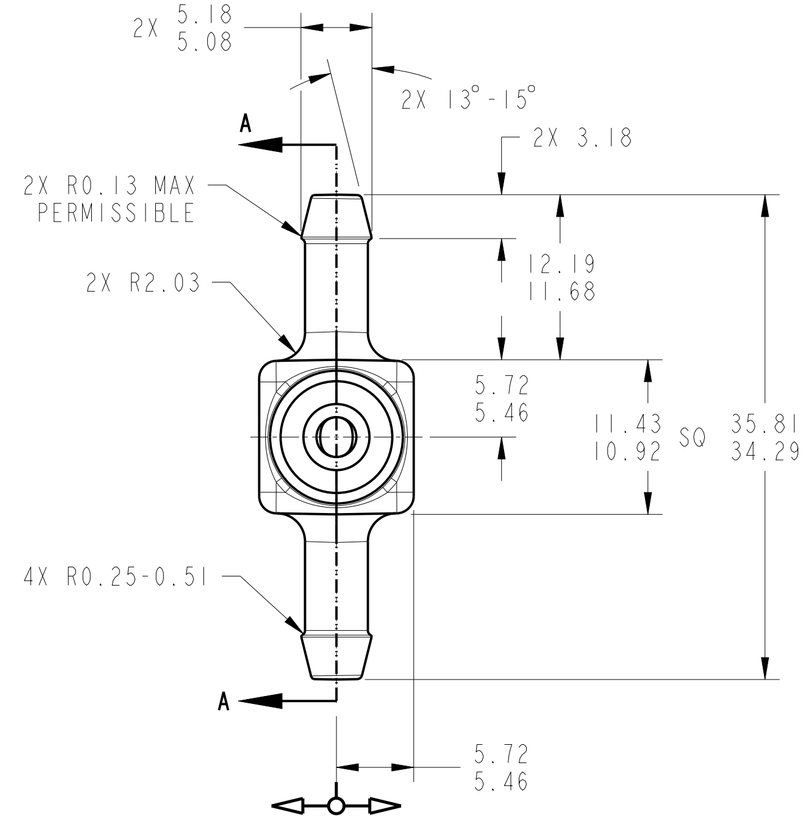


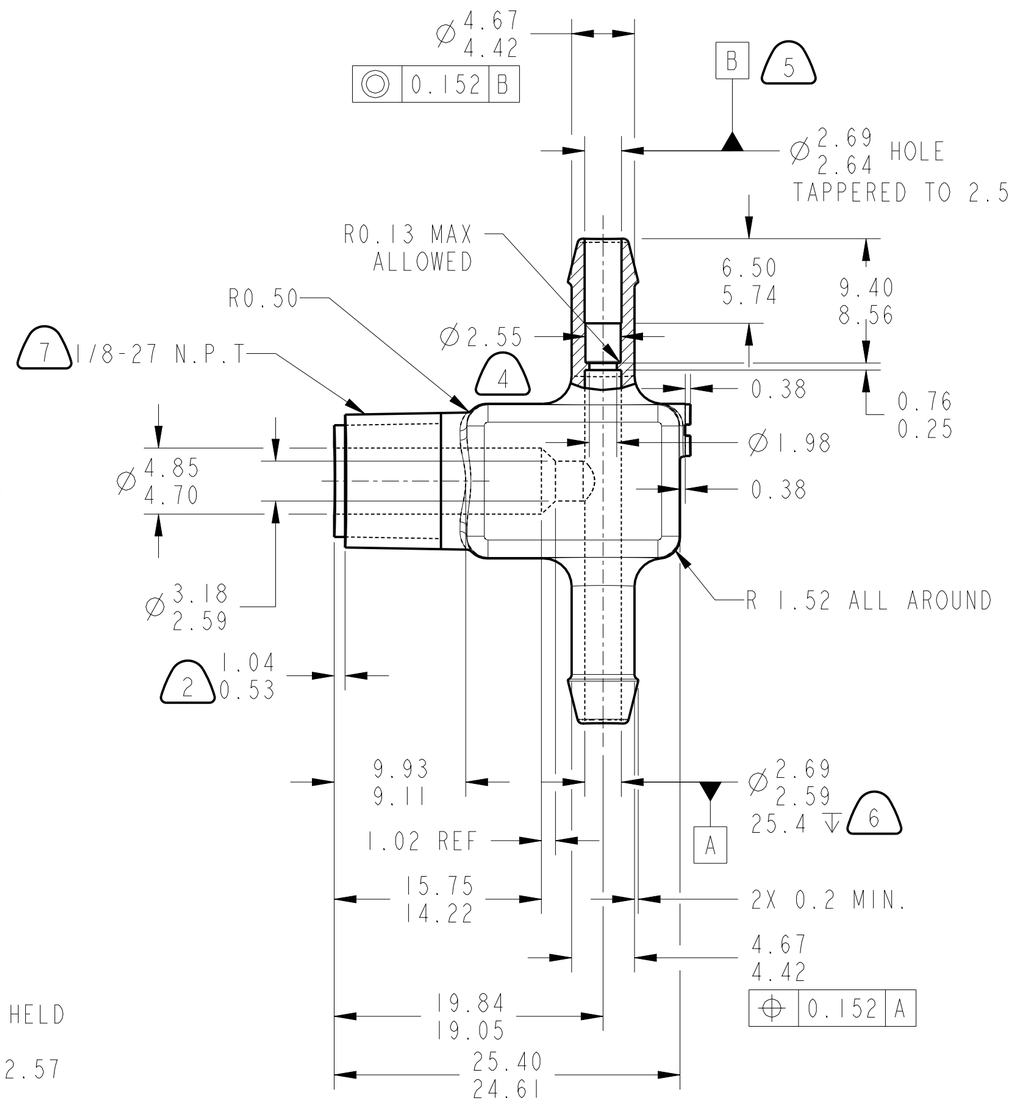

SECTION A-A



SCALE 2:1

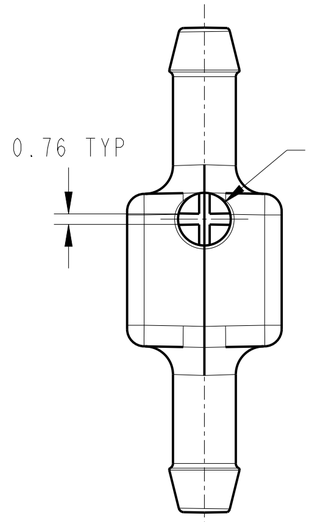

NOTES:

1 MATERIAL: SEE TABLE.
2 THREAD TO START Ø0.53 TO 1.04 FROM END.
3 INTERNAL PASSAGE MUST BE OPEN AND FREE OF ALL FLASH.
4 THE DIA BETWEEN THE 6.50 DIM. AND 8.81 DIM. IS TO BE HELD WITHIN 2.54-02.57.
5 THE JUNCTION BETWEEN THE TAPERED HOLE AND THE Ø2.54/2.57 IS TO BE WITHOUT ANY STEM OR SHOULDER.
6 ACCEPTABLE IF AN 2.36 PIN CROSSES OVER PROJECTION AT JUNCTION OF TWO HOLES.
7 THREAD TO FIT GAUGE, +1,-1/2 THREAD TO PROJECT WHEN 5 INCH LBS TORQUE ARE APPLIED DISCOUNT UNTHREADED PORTION AT SMALL END.
8 REFER TO 3D MODEL FOR ANY DIMENSIONS NOT SHOWN. 3D MODEL DIMENSIONS WILL ALWAYS TAKE PRECEDENCE OVER DRAWING DIMENSIONS. UNLESS OTHERWISE SPECIFIED, ALL FEATURES TO BE WITHIN 0.4 RELATIVE TO SOLID MODEL.

DIMENSIONAL TOLERANCE TABLE	
SIZE (MILLIMETERS)	TOLERANCE ±
HOLE Ø	0.05
ANGLES	2°
ABOVE INCL.	----
0 - 12.5	0.12
12.5 - 25	0.16
25 - 50	0.20
50 - 75	0.24
75 - 100	0.28
100 - 125	0.32
125 - 150	0.36
150 - 175	0.40
175 - 200	0.50

PART NO.	DESCRIPTION	PRIMARY MATERIAL	RAW MATERIAL NO. / ALTERNATE MATERIAL	MATERIAL	COLOR
24-758-3	FITTING, BRANCH TEE	RESIN, MODIFIED, POLYPHENYLENE OXIDE, RoHS	01-61-223	GE PLASTICS NORYL GRADE SEIX-873	WHITE
		COLORANT, RoHS	02-512-277	CLARIANT UN 6994	GREEN
24-758-11	ADAPTER, BRANCH TEE	RESIN, MODIFIED, POLYPHENYLENE OXIDE, RoHS	01-61-223	GE PLASTICS NORYL GRADE SEIX-873	WHITE
		CONCENTRATE, POLYPHENYLENE OXIDE COLORING AGENT	02-512-250	CLARIANT OMNICOLOR UN3872	RED

SEE WINDCHILL WTPARTS FOR SUFFIX STATES, LATEST RELEASED REVISIONS AND APPLICABLE SPECIFICATIONS

- UNLESS OTHERWISE SPECIFIED -

ALL GEOMETRY IS DRAWN TO NOMINAL SIZE OF DIMENSION

VIEW PLACEMENT PER 3RD ANGLE PROJECTION

REFER TO JCI B.E. ENGINEERING STANDARDS FOR CURRENT INFO ON ENGINEERING DESIGN REQUIREMENTS

STANDARD DIMENSION TOLERANCES: SEE TABLE

MAXIMUM SURFACE TEXTURE 3.2 (MICROMETERS)

PARTING LINE

SAFETY KEY LAST CHARACTERISTIC SYMBOL [NONE]

Johnson Controls
BUILDING TECHNOLOGIES & SOLUTIONS
MILWAUKEE, WI., U.S.A.

IN CONSIDERATION OF THE RECEIPT OF THIS DOCUMENT, THE RECIPIENT AGREES NOT TO REPRODUCE, COPY USE OR TRANSMIT THIS DOCUMENT AND/OR THE INFORMATION THEREIN CONTAINED, IN WHOLE OR IN PART, TO SUFFER SUCH ACTION BY OTHER, FOR ANY PURPOSE, EXCEPT WITH THE WRITTEN PERMISSION OF JOHNSON CONTROLS, INC. AND FURTHER AGREES TO SURRENDER SAME TO JOHNSON CONTROLS, INC. UPON DEMAND.

ALL APPROVALS ELECTRONICALLY STORED INSIDE WINDCHILL

DRAWN BY: Amarjeet Yadav
DATE: 04-01-25
STATE: Released
SCALE: 3:1
SIZE: C-SIZE
UNITS: US METRIC MM[INCH]
DRAWING STANDARD: ASME Y14.5-2009

TITLE: ADAPTER, BRANCH TEE, INTERNAL RESTRICTOR, 1/4 O.D. PLASTIC TUBING X 1/8 MALE PIPE THREAD

DRW#: 24-758-SUFFIX
LAST ECN: ECN69314
REV: F
SH#: 1 OF 1

CREO\PLM
Rev C
12-20-20