


1. You can use the “grep” command to search for something or filter.

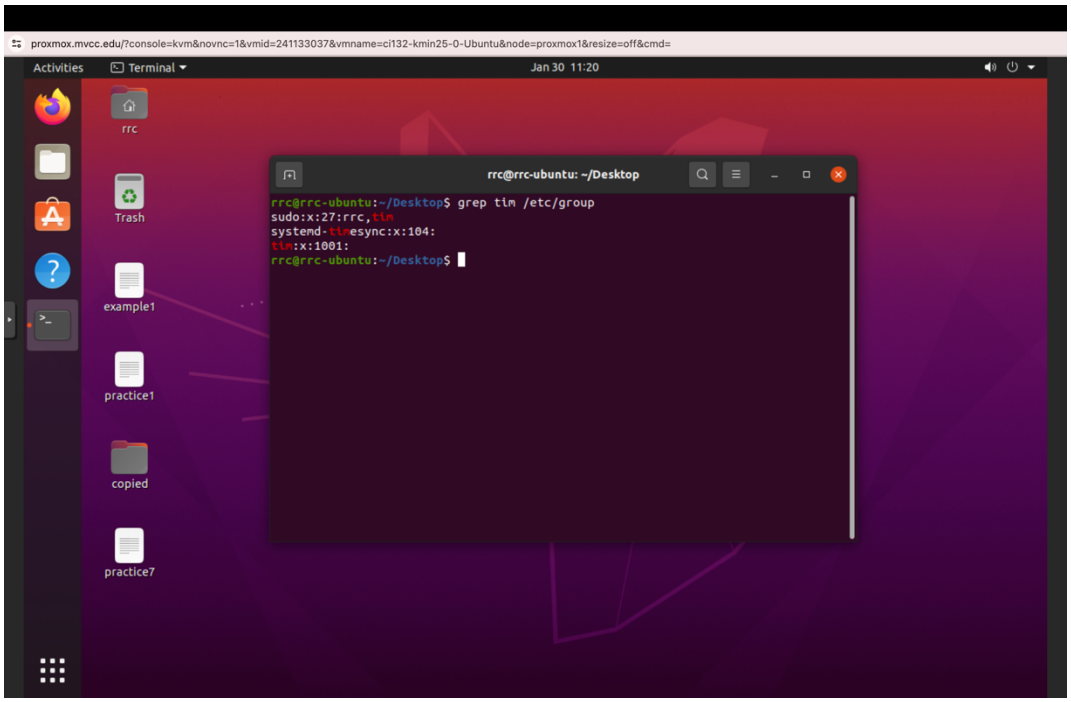


2. You can use “|” called pipe to forward one command to another.

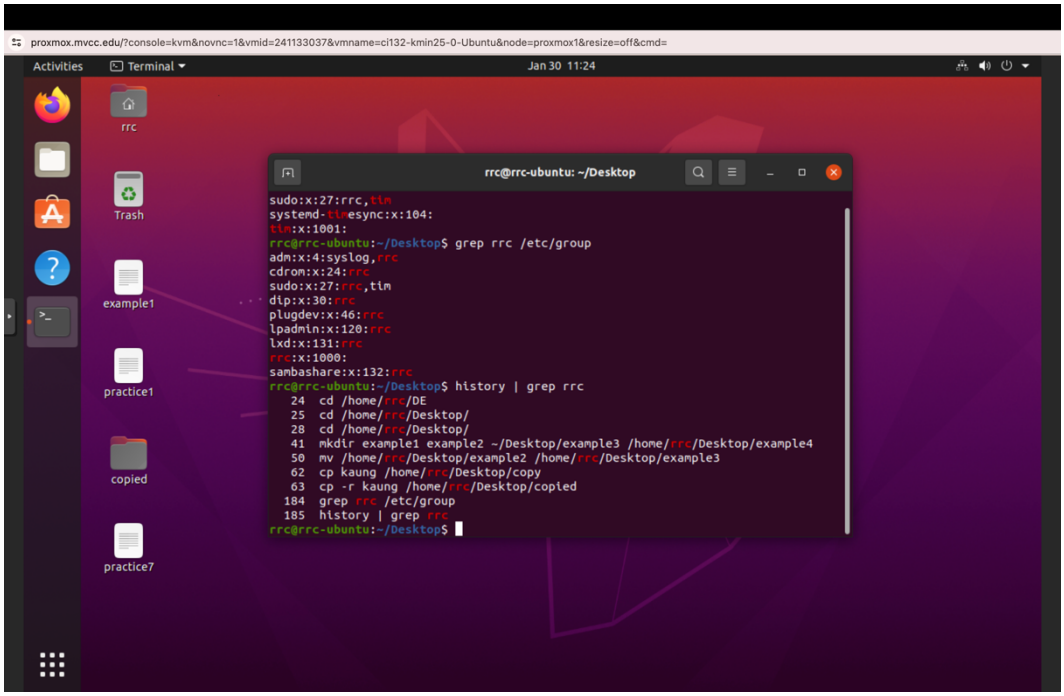


3. You can run the previous command out of your history with “!” and the command number in the history.

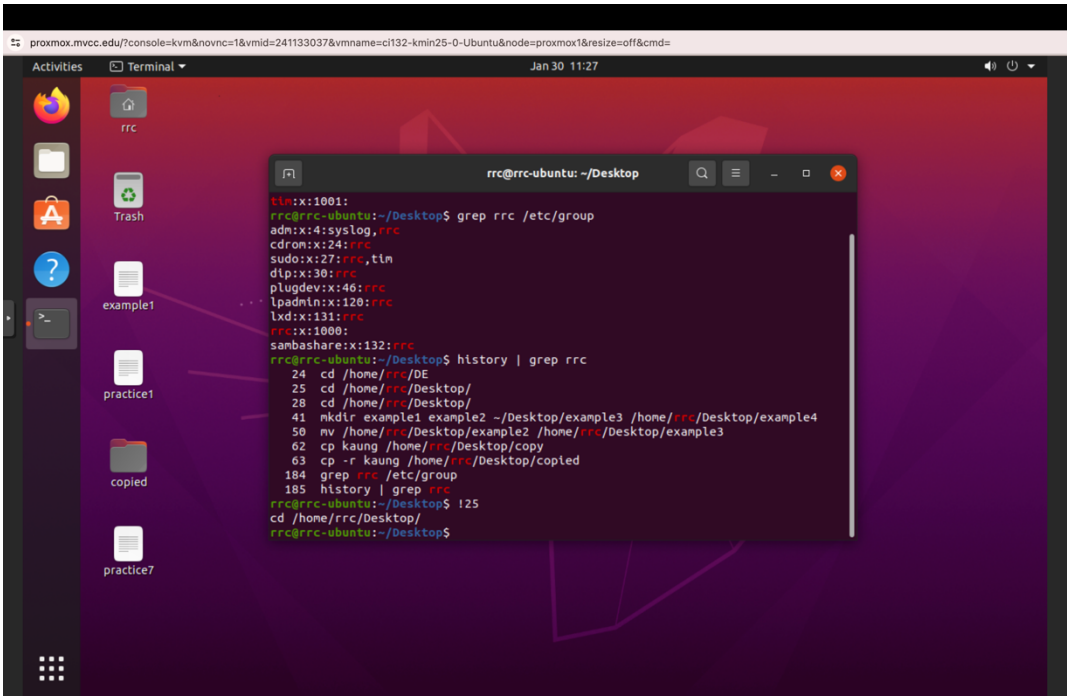


4. You can also change someone else’s account using the “sudo passwd” command.

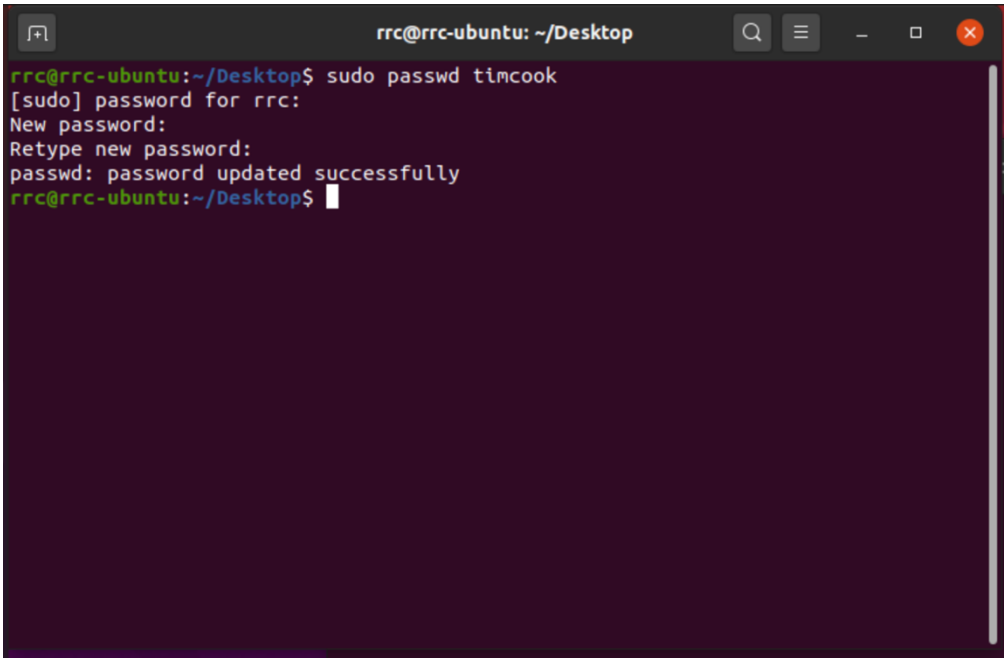


5. You can view the passwd file by simply using the “cat” command. But this passwd file doesn’t store any information about users’ passwords.

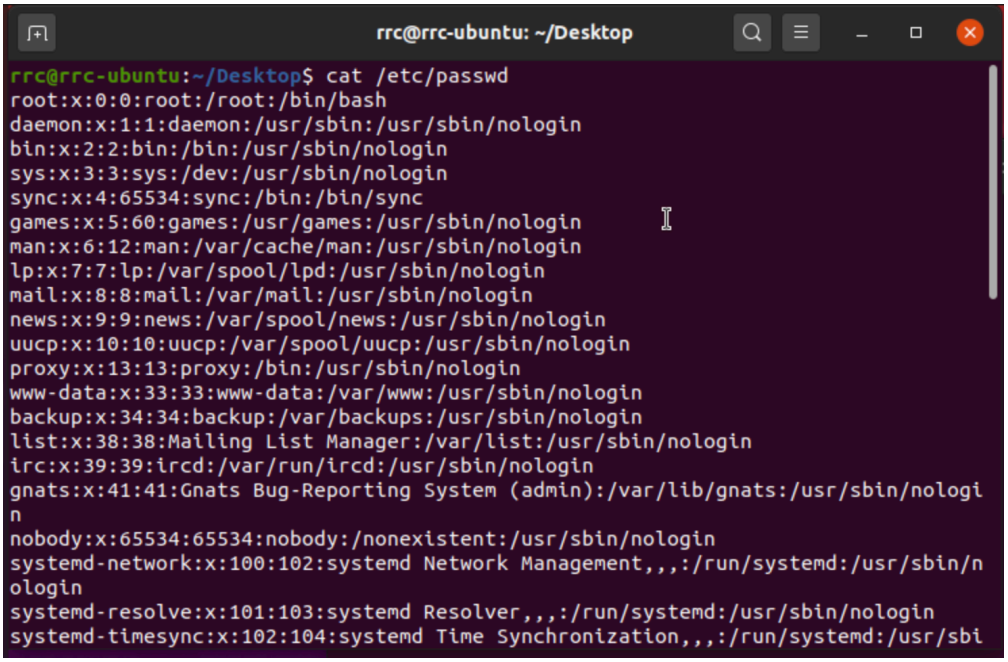


6. However, there is a file named “shadow” inside “/etc” which you need sudo permission to view since it stores the password information.

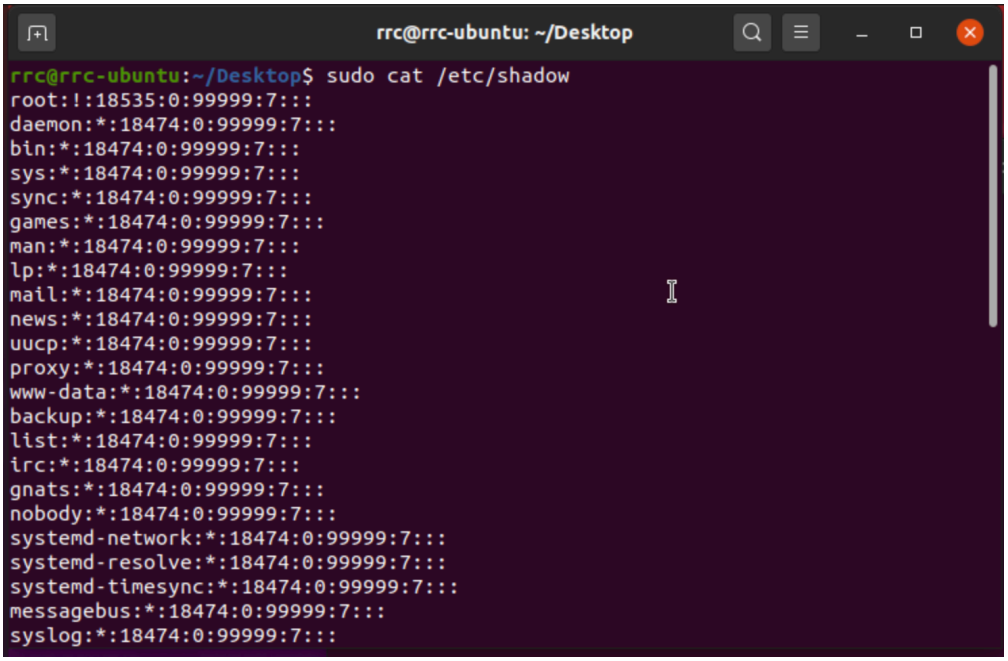


7. As you can see the computer stores our password information in other forms. Your computer does not know your password. When you type your password, it changes into this form and the computer will only unlock if it matches these random words.

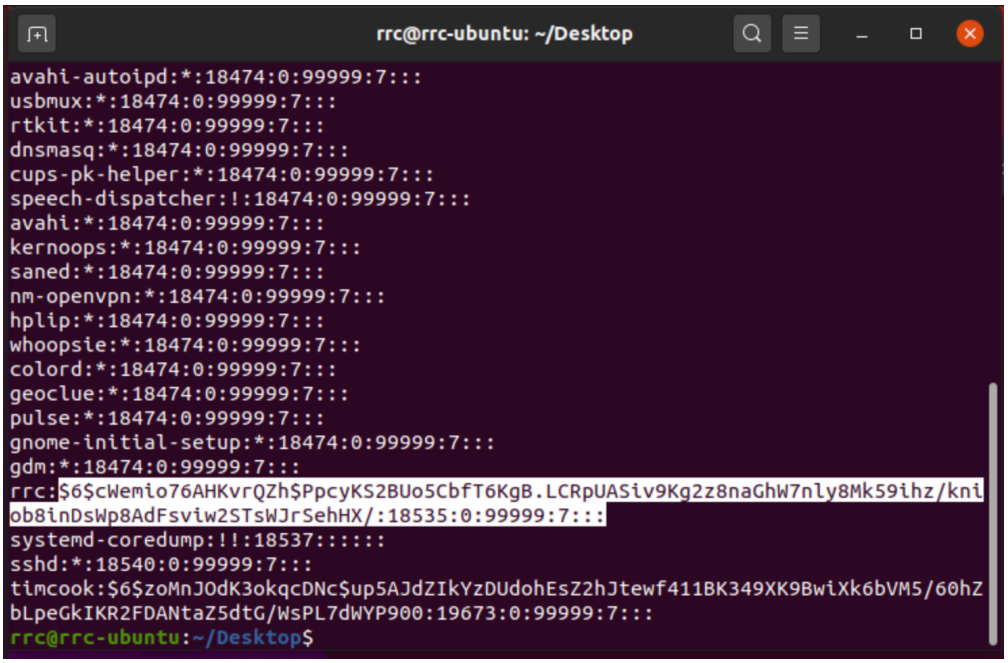


8. You can use the Python language to work on guessing the password. Just simply type “python3” then “import crypt”.

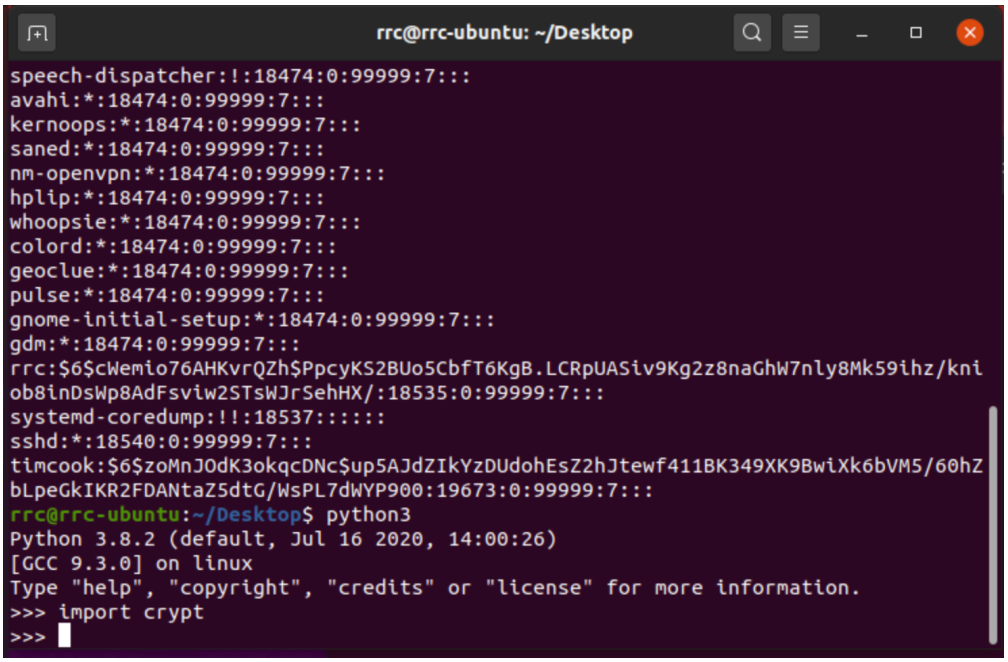


9. You can now type crypt.crypt as below and then type the password you think might be and then type the higilighted text from the first $ to the third $ in the format shown below.

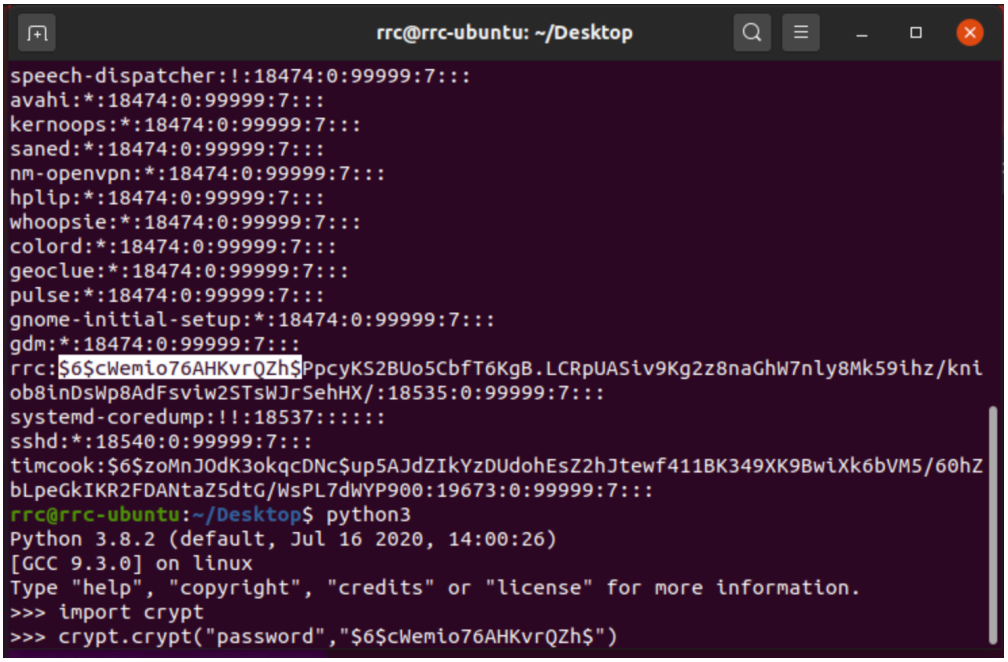


10. It will generate the following random words that match the highlighted words meaning your password guess is correct. In this case, the password is just “password”.

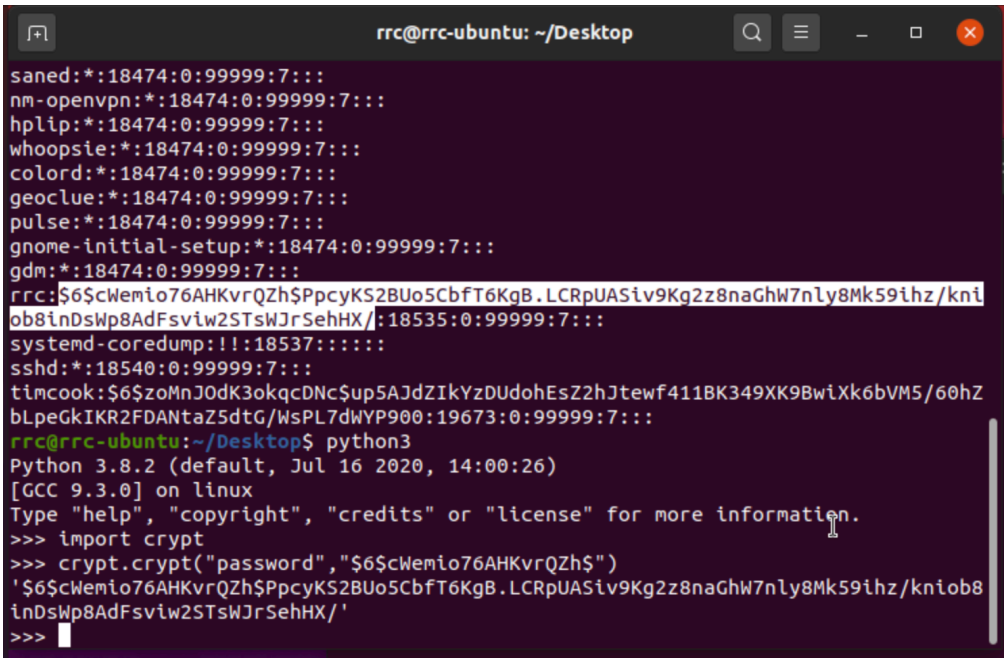


11. You can see that if you try to put an upper case letter, the outputs will be completely different even just one letter.

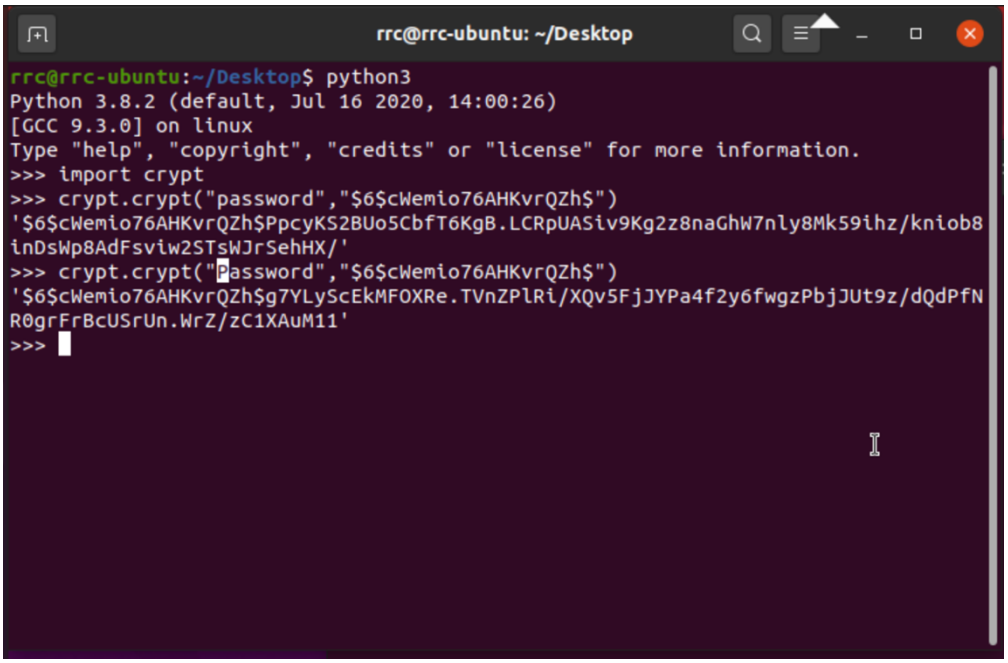


12. Here's what I've done for my new user, Tim.

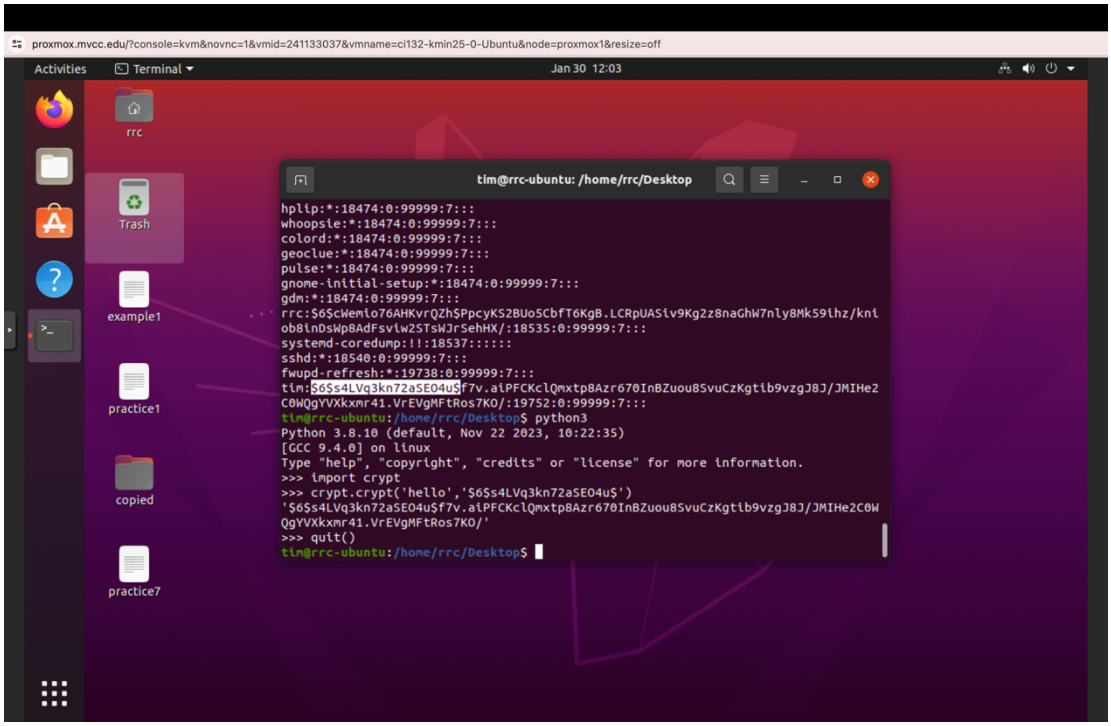


13. You can use the "ifconfig" command to see your network configuration. This only works when you add net tools when you set up your machine.

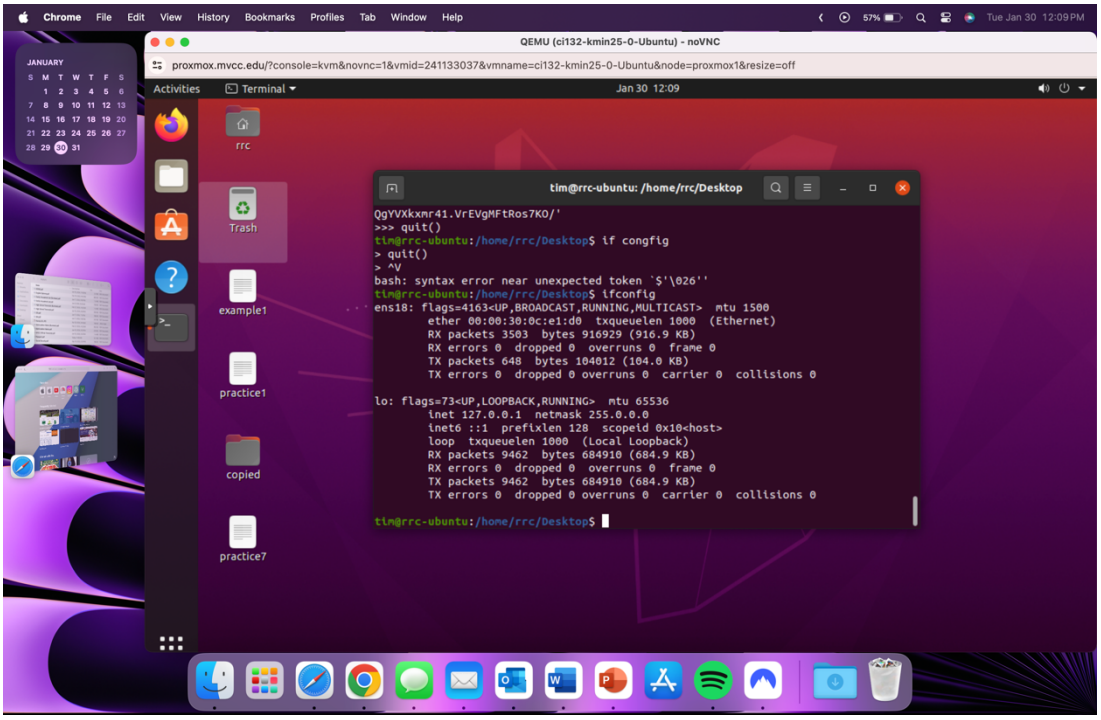


14. But, the “ip a” command will work throughout the entire Linux system providing the network configuration.

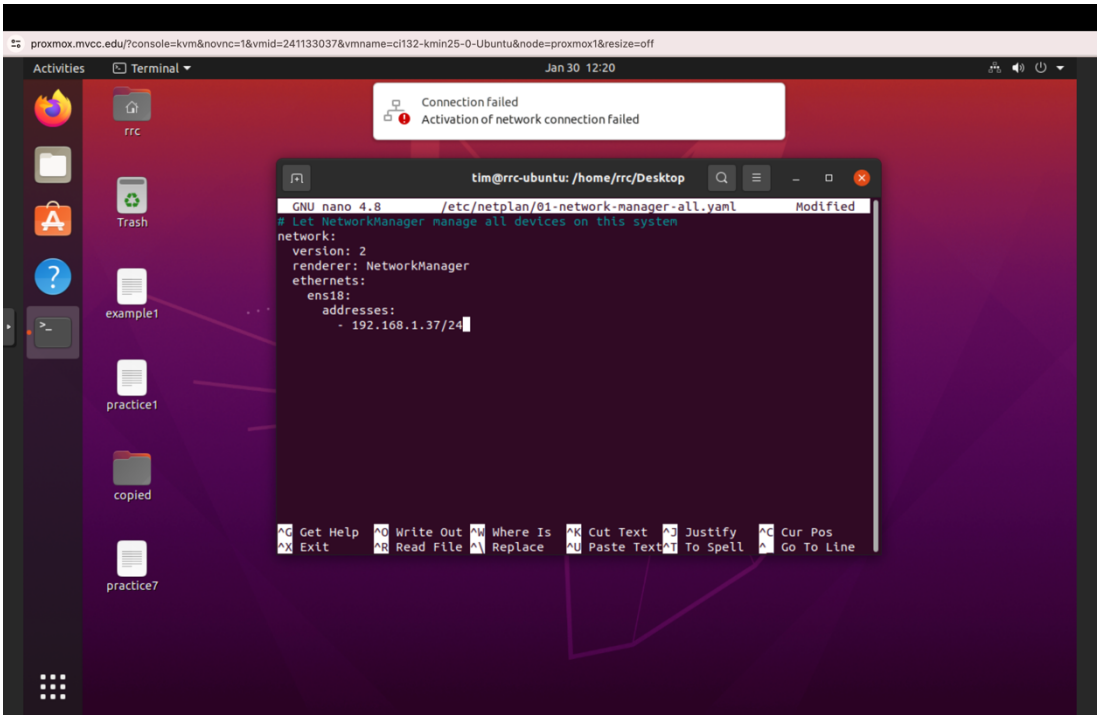

15. You can add ip address to your ens18 by editing the interface file. Type the following exactly apart from the address and the mask. And then, save it.

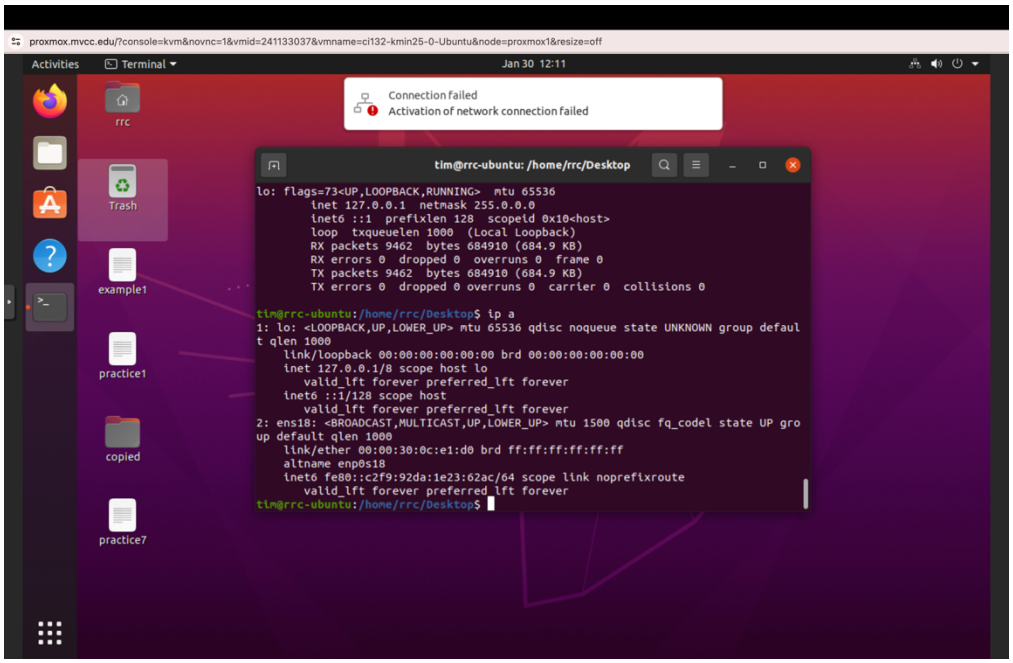

16. You will need to restart this part, NOT the computer, to start the service. The command for this is “sudo systemctl restart networking”

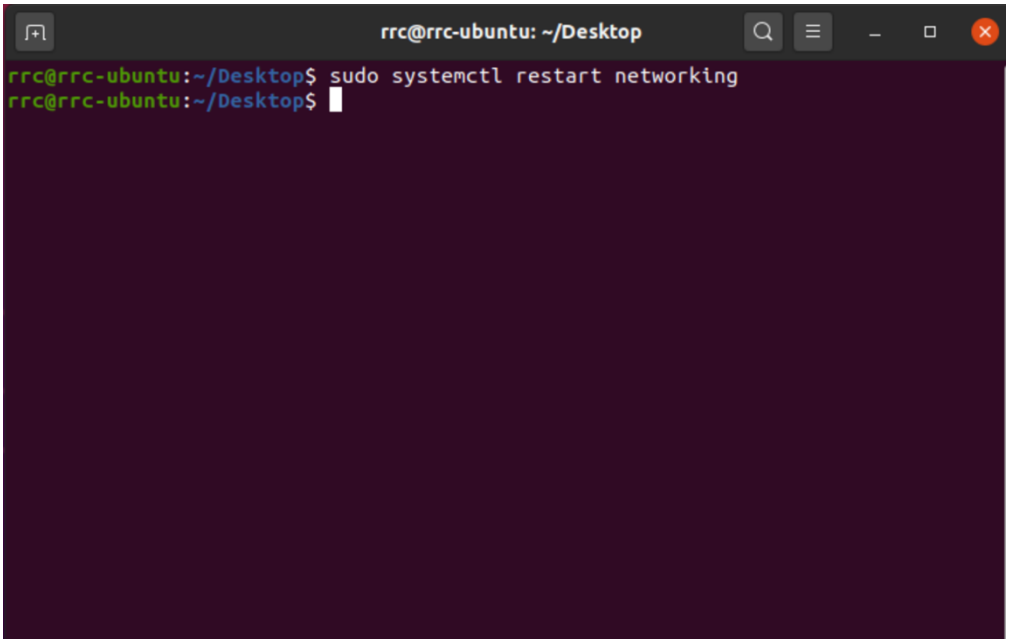

17. You can type the “ping” command that tires sending the signal to the IP address provided.

