

Selected street

39.74446, -104.96777

Location: 39.74446, -104.96777

The concern

Audit example: the sidewalk narrows at the bus stop, forcing people into the road.

What we would like to improve

Keep a clear route for people walking and rolling.

What we are asking for

Please arrange a site walk with transit staff and neighbors to review the clear walking route.

No linked observation supplied. The concern and location have not been independently verified.

Concept for discussion. Review the dimensions, assumptions, and limited checks on the following pages. This document does not submit a request to an agency.

Prepared September 28, 2026 (UTC).

Existing-condition dimension basis: Assumed.

Existing dimensions are working assumptions, not a verified site survey.

Proposed widths remain concept allocations, not surveyed conditions.

Source or method: Not provided.


Before · recorded or assumed layout

Declared right-of-way: 50 ft · Two Way



After · proposed layout

Declared right-of-way: 50 ft · Two Way

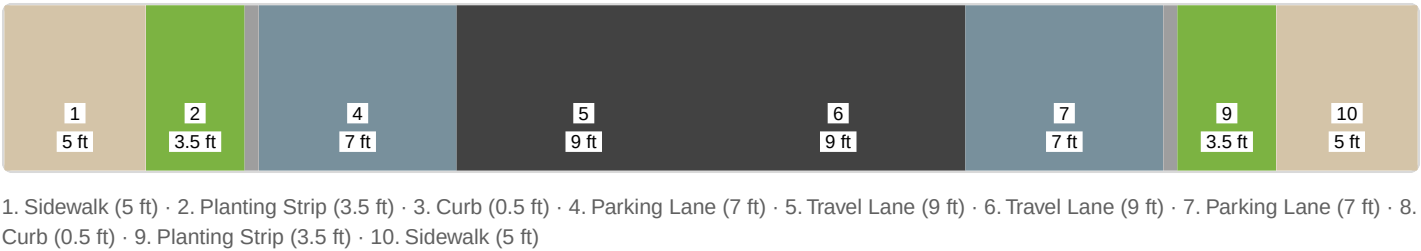

Space allocation changes

- Sidewalk: 12.0 ft to 10.0 ft (-2.0 ft)
- Parking Lane: 16.0 ft to 14.0 ft (-2.0 ft)
- Travel Lane: 20.0 ft to 18.0 ft (-2.0 ft)
- Planting Strip: 0.0 ft to 7.0 ft (+7.0 ft)

Widths are summed by element type across the street. These changes do not predict traffic, safety, accessibility, or other real-world outcomes.

Schematic cross-sections, proportional within each diagram. Intersection geometry, grades, and conditions along the street are not represented.

Selected street

Declared right-of-way: 50 ft · Curb-to-curb: 32 ft

Functional class: Local · Template: complete-street-local

Element	Side	Width	Min.	Rec. min.	Stored guidance source
Sidewalk	Left	5 ft	4 ft	5 ft	PROWAG R302.3; NACTO USDG p.39
Planting Strip	Left	3.5 ft	2 ft	4 ft	NACTO USDG p.43
Curb	Left	0.5 ft	0.5 ft	0.5 ft	NACTO USDG p.38
Parking Lane	Left	7 ft	7 ft	7.5 ft	NACTO USDG p.84
Travel Lane	Left	9 ft	9 ft	10 ft	NACTO USDG p.74; narrow for traffic calming
Travel Lane	Right	9 ft	9 ft	10 ft	NACTO USDG p.74; narrow for traffic calming
Parking Lane	Right	7 ft	7 ft	7.5 ft	NACTO USDG p.84
Curb	Right	0.5 ft	0.5 ft	0.5 ft	NACTO USDG p.38
Planting Strip	Right	3.5 ft	2 ft	4 ft	NACTO USDG p.43
Sidewalk	Right	5 ft	4 ft	5 ft	PROWAG R302.3; NACTO USDG p.39

Min. and recommended minimum values above are stored element guidance, not a complete specification or proof that local requirements are met.

Selected dimensional checks

The validator compares supported element widths against stored minimum, maximum, and recommended widths, including applicable stored PROWAG width entries and NACTO guidance. It also compares summed widths with the declared right-of-way and curb-to-curb widths.

Reported findings: 0 errors · 6 warnings · 2 guidance notes

These are findings, not a count of checks performed. An empty result does not establish compliance or approval.

Info · sidewalk width 5 ft is below NACTO recommended 6 ft — could be improved NACTO USDG p.39 · Entered: 5 ft · Comparison value: 6 ft
Warning · planting-strip width 3.5 ft is below NACTO recommended minimum of 4 ft NACTO USDG p.43 · Entered: 3.5 ft · Comparison value: 4 ft
Warning · parking-lane width 7 ft is below NACTO recommended minimum of 7.5 ft NACTO USDG p.84 · Entered: 7 ft · Comparison value: 7.5 ft
Warning · travel-lane width 9 ft is below NACTO recommended minimum of 10 ft NACTO USDG p.74 · Entered: 9 ft · Comparison value: 10 ft
Warning · travel-lane width 9 ft is below NACTO recommended minimum of 10 ft NACTO USDG p.74 · Entered: 9 ft · Comparison value: 10 ft
Warning · parking-lane width 7 ft is below NACTO recommended minimum of 7.5 ft NACTO USDG p.84 · Entered: 7 ft · Comparison value: 7.5 ft
Warning · planting-strip width 3.5 ft is below NACTO recommended minimum of 4 ft NACTO USDG p.43 · Entered: 3.5 ft · Comparison value: 4 ft

Still to be assessed

Local requirements, verified site dimensions, right-of-way boundaries, slopes, crossing and curb-ramp details, sight distance, traffic operations, drainage, utilities, construction feasibility, and broader accessibility are not assessed here.

Citations identify guidance stored in the app. Check the original sources, their applicability, and current local requirements with the intended reviewer. This is not a comprehensive engineering, legal, or accessibility assessment.

Prepared with Curbwise on September 28, 2026 (UTC). Use this brief to discuss a next step, not as construction documentation.