


基础 Foundation



Stationary Crane
固定式起重机

塔身 Tower	高度 (米) TH(m)	臂长 (米) Jib reach(m)	基础载荷 Foundation loadings			地脚反力 Corner forces	
			Mc(kN.m)	Nc(kN)	H(kN)	F1(kN)	F2(kN)
L68B2	60,5	65	5403	799	145	-1710	2110

运输 Shipping

塔身 Tower	高度 (米) TH(m)	集装箱数量 Container QTY			
		FR	40' OP	40' HQ	20' GP
L68B2	60,5			6	1

机构性能 Mechanisms

机构特性 Mechanisms specification									kW		
起升 Hoisting		55JLF30	m/min	0-108	0-72	0-36	0-54	0-36	0-18	450m	45
			t	1,5	3,0	6,0	3,0	6,0	12,0		
			m/min	0-80		0-40	0-40	0-20		550m	51,5
			t	2,5		5,0	5,0	10,0			
变幅 Trolleying		4T3V4	m/min	0-58						95Nm	
回转 Slewing		RZV145x 2	r/min	0,64						145Nm x 2	
行走 Travelling		4RTVF4	m/min	22						4 x 4	
电源 Power Supply					380V 50Hz / 440V 60Hz						
KVA 供电容量 Necessary Electric Power					53kVA / 57kVA						

沈阳宝泉商贸有限公司

地址: 辽宁省沈阳市大东区东北大马路264号, ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA

电话: 0086-24-26210512

邮箱: bqswgs@163.com

网址: http://www.bq-sy.com


SHENYANG BAOQUAN BUSINESS CO., LTD

ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA


Tel: 0086-24-26210512

E-mail: bqswgs@163.com

Url: http://www.bq-sy.com

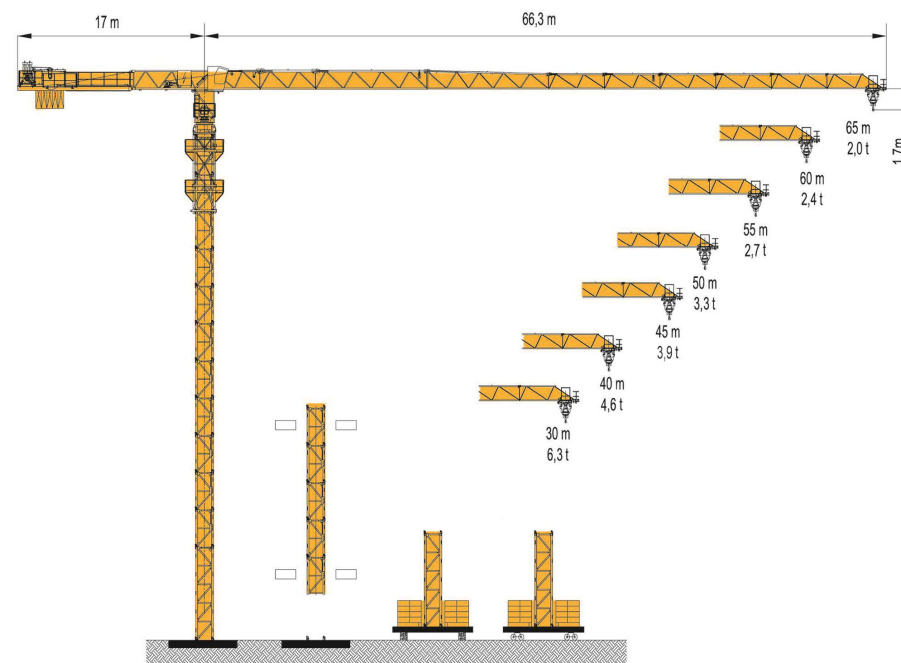


塔身 Tower

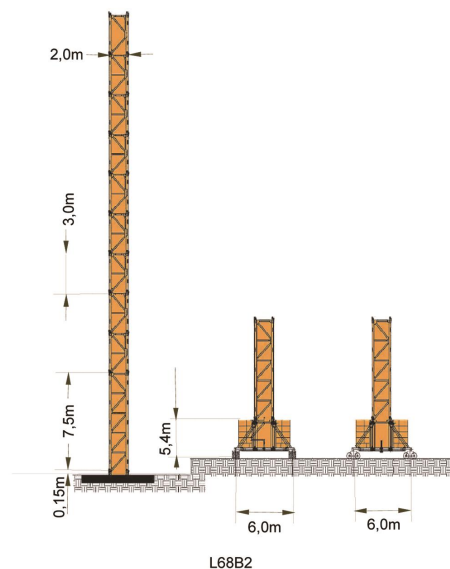


Tower configuration
塔身组成

序号 No.	塔身 Tower	基础节 Base Mast	标节 Mast	高度 (米) HH(m)	臂长 (米) Jib reach(m)
1	L68B2	1	17	60.5	30-65


起重臂 Jib

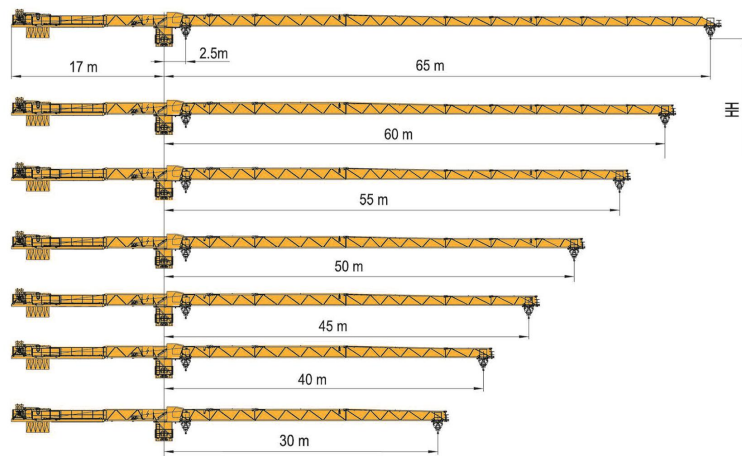

载荷特性 Load Diagrams

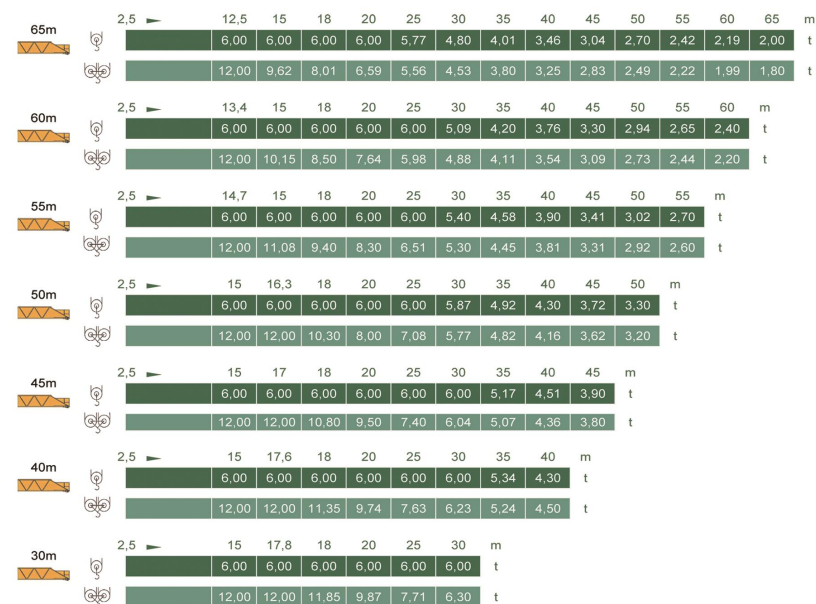

附着 Anchorages

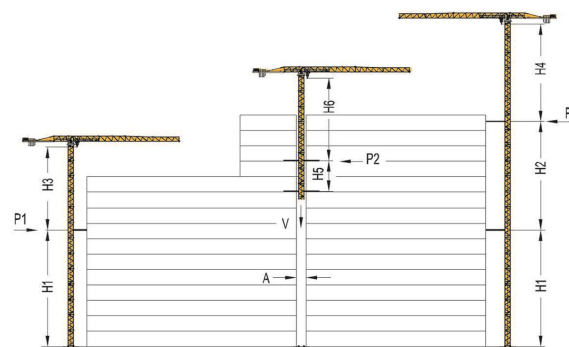

塔身 Mast	m	L68B2	
		工作状态 Working	非工作状态 Off Working
H1	48.0	—	—
H2	36.0	—	—
H3	48.5	—	—
H4	48.5	—	—
H5	18.0	—	—
H6	33.5	—	—
P1	—	9.5	28.1
P2	—	14.3	28.8
V	—	80.4	70.4
A	2.6	—	—
B	2.2	—	—

