



## 附着 Anchorages

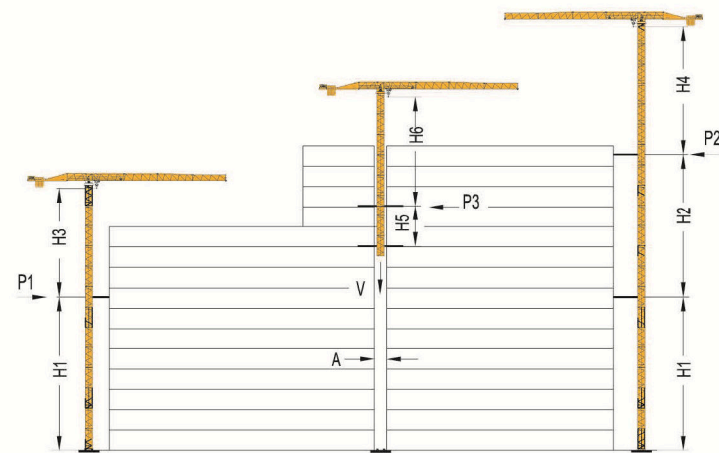

| 塔身<br>Mast | m    | TG20B           |                      | T17,18          |                      |
|------------|------|-----------------|----------------------|-----------------|----------------------|
|            |      | 工作状态<br>Working | 非工作状态<br>Off Working | 工作状态<br>Working | 非工作状态<br>Off Working |
| H1         | 48,0 | —               | —                    | 36,2            | —                    |
| H2         | 36,0 | —               | —                    | 30,0            | —                    |
| H3         | 48,5 | —               | —                    | 43,3            | —                    |
| H4         | 48,5 | —               | —                    | 37,3            | —                    |
| H5         | 18,0 | —               | —                    | 12,0            | —                    |
| H6         | 36,5 | —               | —                    | 37,3            | —                    |
| P1         | —    | 16,8            | 27,3                 | —               | 23,5                 |
| P2         | —    | 11,4            | 28,0                 | —               | 19,5                 |
| P3         | —    | 14,4            | 27,5                 | —               | 19,8                 |
| V          | —    | 78,7            | 68,5                 | —               | 70,5                 |
| A          | 2,6  | —               | —                    | 2,1             | —                    |
| B          | 2,2  | —               | —                    | 2,1             | —                    |



## 机构性能 Mechanisms

| 机构特性<br>Mechanisms specification  |         |       |                       |      |      |      |      | kW          |  | 可选择<br>OptionsI<br>winch |
|-----------------------------------|---------|-------|-----------------------|------|------|------|------|-------------|--|--------------------------|
| 起升<br>Hoisting                    | 45JLF25 | m/min | 0-84                  | 0-42 | 0-42 | 0-21 | 500m | 55          |  |                          |
|                                   |         | t     | 2,5                   | 5,0  | 5,0  | 10,0 |      |             |  |                          |
| 变幅<br>Trolleying                  | 95JXL   | m/min | 0 - 58                |      |      |      |      | 95Nm        |  |                          |
| 回转<br>Slewing                     | RCV95   | r/min | 0,55                  |      |      |      |      | 95Nm x 2    |  |                          |
| 行走<br>Travelling                  |         | m/min | 22 / 11               |      |      |      |      | 3,4/1,7 x 4 |  |                          |
| 电源 Power Supply                   |         |       | 380V 50Hz / 440V 60Hz |      |      |      |      |             |  |                          |
| KVA 供电容量 Necessary Electric Power |         |       | 62kVA / 66kVA         |      |      |      |      |             |  |                          |

沈阳宝泉商贸有限公司

地址：辽宁省沈阳市大东区东北大马路264号, ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA

电话：0086-24-26210512

传真：0086-415-3165597

邮箱：bqswgs@163.com

网址：http://www.bq-sy.com

SHENYANG BAOQUAN BUSINESS CO., LTD


ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA

Tel: 0086-24-26210512


Fax: 0086-415-3165597

E-mail: bqswgs@163.com

Url: http://www.bq-sy.com

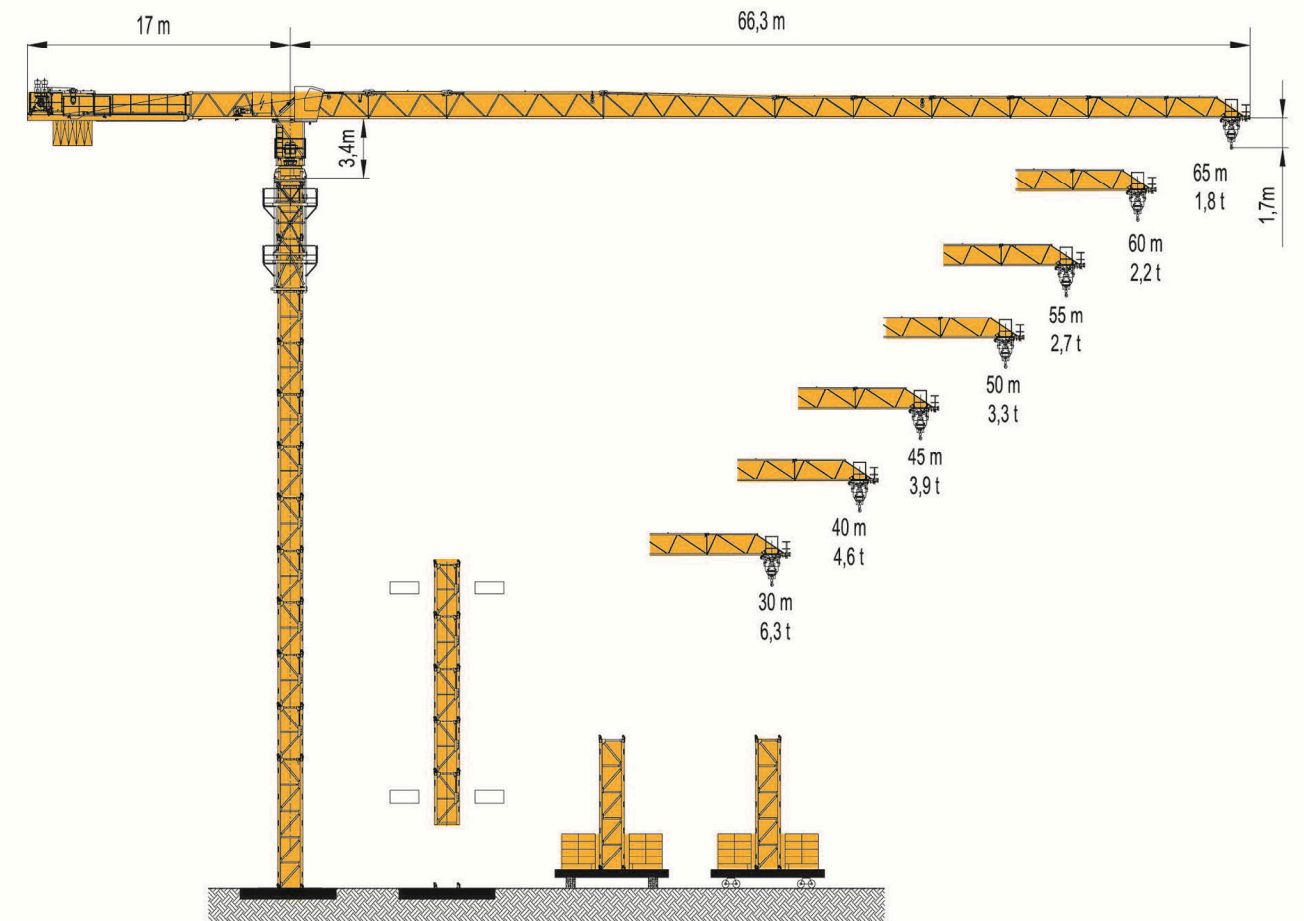


起重臂 Jib

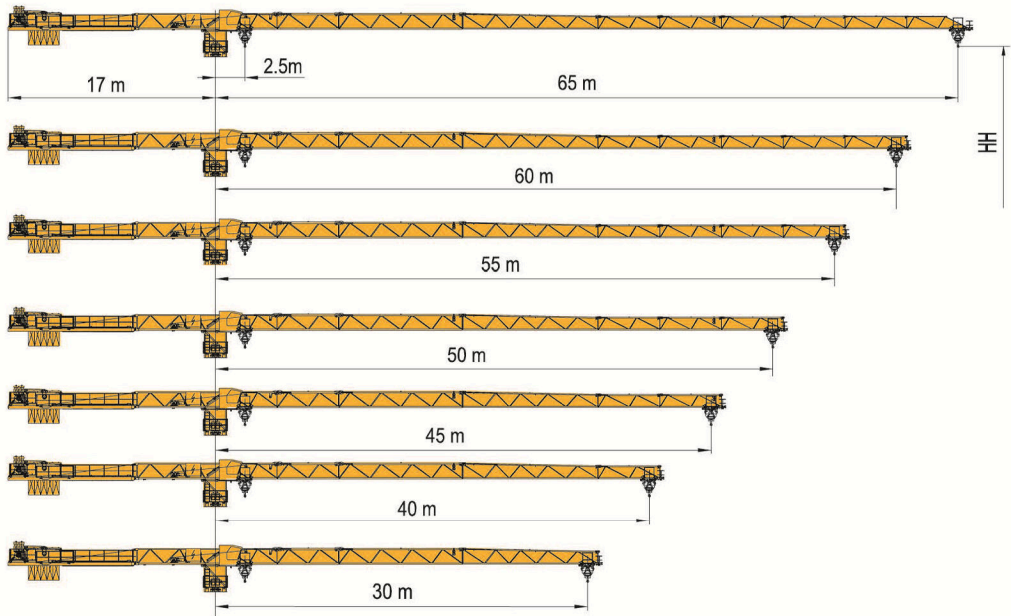

载荷特性 Load Diagrams

|     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |   |
|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 65m | 2,5  | 14,5 | 15   | 18   | 20   | 25   | 27,7 | 28,2 | 30   | 35   | 40   | 45   | 50   | 55   | 60   | 65   | m |
|     | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 4,60 | 3,81 | 3,26 | 2,84 | 2,50 | 2,22 | 1,99 | 1,80 | t |
| 60m | 2,5  | 15   | 15,4 | 18   | 20   | 25   | 29,4 | 30   | 35   | 40   | 45   | 50   | 55   | 60   |      |      | m |
|     | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 4,00 | 3,56 | 3,10 | 2,74 | 2,45 | 2,20 |      |      | t |
| 55m | 2,5  | 15   | 16,7 | 18   | 20   | 25   | 30   | 32,1 | 32,5 | 35   | 40   | 45   | 50   | 55   |      |      | m |
|     | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 4,58 | 3,90 | 3,41 | 3,02 | 2,70 |      |      | t |
| 50m | 2,5  | 15   | 18   | 18,3 | 20   | 25   | 30   | 34,7 | 35,1 | 40   | 45   | 50   |      |      |      |      | m |
|     | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 4,30 | 3,72 | 3,30 |      |      |      |      | t |
| 45m | 2,5  | 15   | 18   | 19   | 20   | 25   | 30   | 36,2 | 36,6 | 40   | 45   |      |      |      |      |      | m |
|     | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 4,51 | 3,90 |      |      |      |      |      | t |
| 40m | 2,5  | 15   | 18   | 19,6 | 20   | 25   | 30   | 35   | 36,9 | 37,3 | 40   |      |      |      |      |      | m |
|     | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 5,00 | 4,60 |      |      |      |      |      | t |
| 30m | 2,5  | 15   | 18   | 19,8 | 20   | 25   | 30   |      |      |      |      |      |      |      |      |      | m |
|     | 5,00 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | t |

塔身 Tower

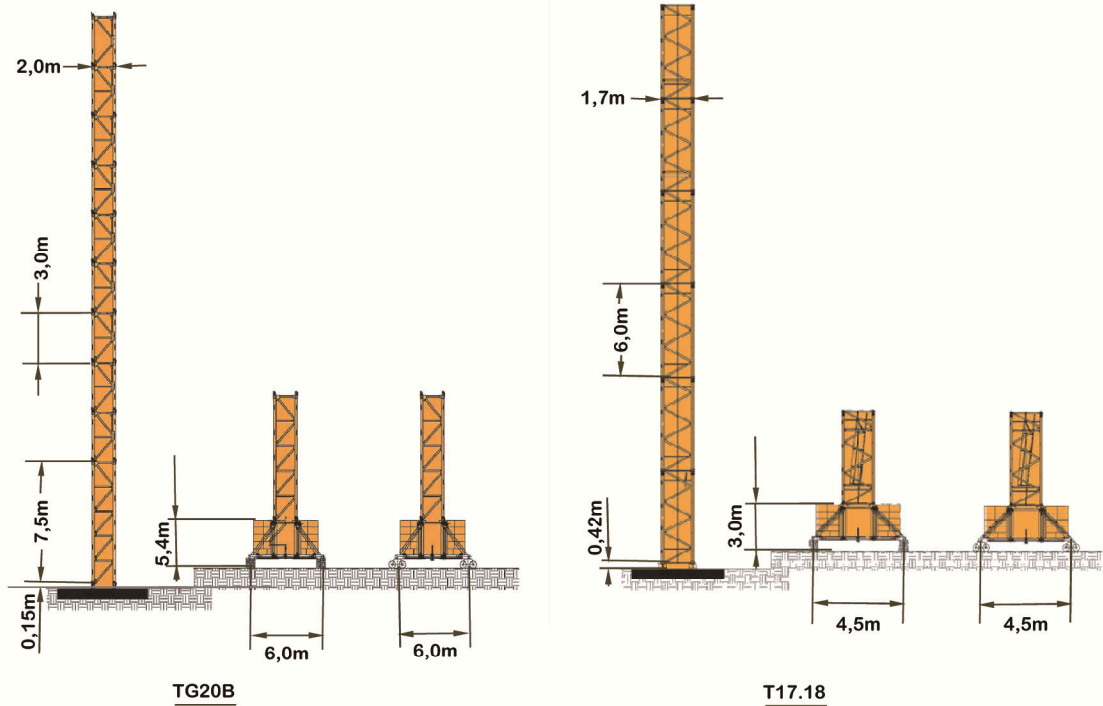

| 固定式 Stationary type |             | 臂架长度 Boom |    |    |    |    |    |    |  |
|---------------------|-------------|-----------|----|----|----|----|----|----|--|
| 塔身 Mast             | 塔身高度 HH (m) | 30        | 40 | 45 | 50 | 55 | 60 | 65 |  |
| No.                 | HH (m)      |           |    |    |    |    |    |    |  |
| 1                   | 9,6         | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 2                   | 12,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 3                   | 15,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 4                   | 18,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| ...                 | ...         | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 15                  | 51,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 16                  | 54,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 17                  | 57,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 18                  | 60,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |

| 压重式或行走式 Travelling type |             | 臂架长度 Boom |    |    |    |    |    |    |  |
|-------------------------|-------------|-----------|----|----|----|----|----|----|--|
| 塔身 Mast                 | 塔身高度 HH (m) | 30        | 40 | 45 | 50 | 55 | 60 | 65 |  |
| No.                     | HH (m)      |           |    |    |    |    |    |    |  |
| 1                       | 9,5         | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 2                       | 12,5        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 3                       | 15,5        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 4                       | 18,5        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| ...                     | ...         | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 15                      | 51,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 16                      | 54,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 17                      | 57,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 18                      | 60,6        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |

| 固定式 Stationary type |             | 臂架长度 Boom |    |    |    |    |    |    |  |
|---------------------|-------------|-----------|----|----|----|----|----|----|--|
| 塔身 Mast             | 塔身高度 HH (m) | 30        | 40 | 45 | 50 | 55 | 60 | 65 |  |
| No.                 | HH (m)      |           |    |    |    |    |    |    |  |
| 1                   | 8,4         | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 2                   | 14,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 3                   | 20,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 4                   | 26,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 5                   | 32,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 6                   | 38,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 7                   | 44,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 8                   | 50,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |

| 压重式或行走式 Travelling type |             | 臂架长度 Boom |    |    |    |    |    |    |  |
|-------------------------|-------------|-----------|----|----|----|----|----|----|--|
| 塔身 Mast                 | 塔身高度 HH (m) | 30        | 40 | 45 | 50 | 55 | 60 | 65 |  |
| No.                     | HH (m)      |           |    |    |    |    |    |    |  |
| 1                       | 8,4         | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 2                       | 14,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 3                       | 20,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 4                       | 26,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 5                       | 32,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |
| 6                       | 38,4        | ●         | ●  | ●  | ●  | ●  | ●  | ●  |  |