


Arduino Pro Mini 328, 3.3V/8MHz

The Arduino Pro Mini 328, 3.3V/8MHz is a minimalist board from SparkFun that is ideal for experienced users. It has an ATmega328 processor, 8 analogue pins, 14 digital I/O pins and supports auto-reset.

Product number DEV-11114

Weight 0.002kg

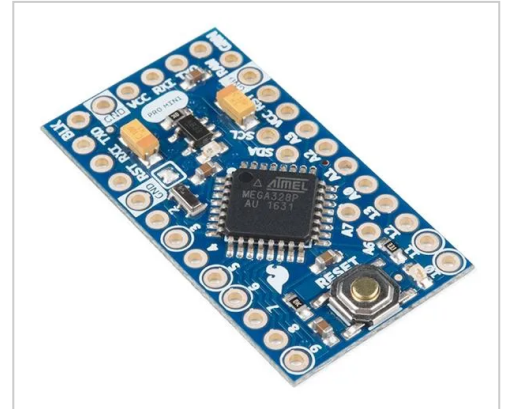

Product description

Arduino Pro Mini 328, 3.3V/8MHz

The Arduino Pro Mini is a minimalist design from SparkFun for Arduino. This is a 3.3V Arduino with an 8MHz bootloader. The board comes without pre-installed pin headers so that individual connectors or wires can be soldered in. It is ideal for experienced users who are familiar with the limitations of the system voltage and the lack of connectors and USB outside the board.

Features at a glance

- ATmega328 runs at 8MHz
- 3.3V operating voltage
- Supports auto-reset
- Power and status LEDs on the board
- USB connector outside the board

Technical specifications

- Operating voltage: 3.3V
- DC input: 3.3V to 12V
- Analogue pins: 8
- Digital I/O pins: 14
- Max. Output: 150mA
- Dimensions: 18x33mm
- Weight: less than 2 grams
- Low-voltage board, no interface circuit to 3.3V devices required
- Supports FTDI basic breakout board and auto-reset
- 0.8mm thin board

Other data

- External resonator with 0.5% tolerance
- Overcurrent protection
- OSHW logo

Scope of delivery

- 1x Arduino Pro Mini 328

Documentation:

- [Circuit diagram](#)
- [Eagle files](#)
- [Tutorial for the first steps](#)
- [Graphical data sheet](#)
- [GitHub](#)

Product properties

Gross Weight (kg)	0.002
Country of Origin	USA
Brand	SparkFun
Product ID	DEV-11114
Manufacturer ID	DEV-11114
EAN	5904422348779
Zolltarifnummer	85423111

More images

