


U6: your measurements recorded

C2NM supports S-812C33AMC, a 3.3 V regulator. Board remains unpowered for resistance tests.

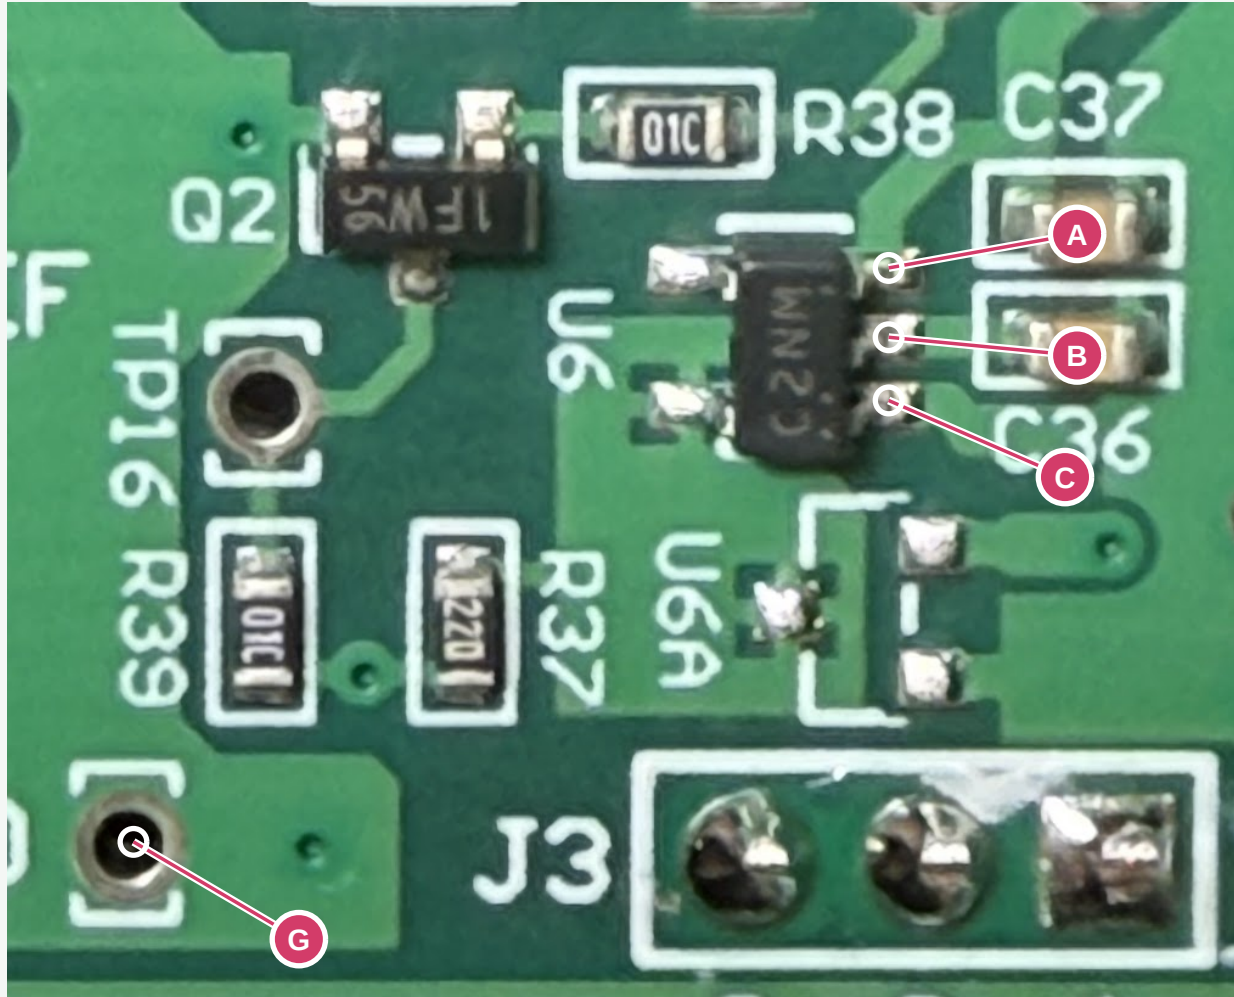

A = original R1 / upper-right lead; B = R2 / middle-right; C = R3 / lower-right.

S-812C33AMC predicts C = pin 1 / GND, B = pin 2 / VIN, A = pin 3 / VOUT. Ground is supported, not proven.

Original photo pixels; vector callouts only. Board orientation is unchanged. Candidate identities are unconfirmed.

PetSafe 100-1339 R03 A | 2026-10-08 | v0.5 measurement plan

Meter setup

Use resistance / ohms. First short the probes together and note the lead resistance.

Keep the black probe on G, the plated hole labelled GND on the PCB. Touch only the circled solder pad with the red probe.

Your readings; shorted tips = 0.5 ohm

G to A = 4.2 kohms (reported)

G to B = 34 kohms (reported)


G to C = 2.7 ohms (reported)

Wait for each reading to settle. Report changing readings too. If unclear, reverse the probes and give both readings.

A beep alone is not enough: a 22-ohm resistor can also trigger continuity. A direct copper connection should be close to your shorted-probe reading.

Q8 and C6: measured results

D-E and S-G read 2 ohms. E-F reads 400 kohms: the proposed direct C6 output tie is withdrawn.

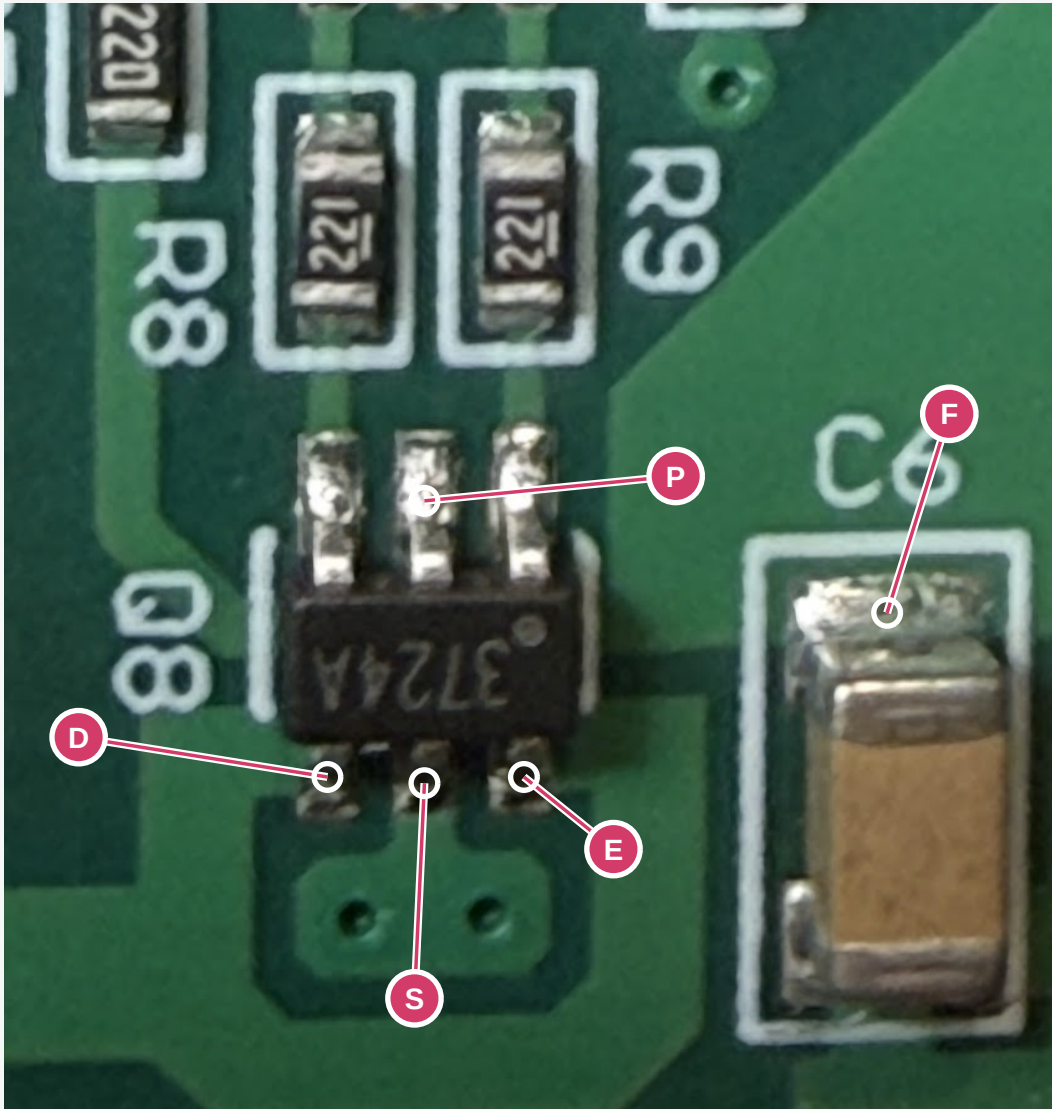

Recorded results

D to E = 2 ohms. This supports joined drain pads.

S to G = 2 ohms. This supports the N-channel source returning to ground.

E to F = 400 kohms. F is not directly joined to the output. That proposed wire is removed.

C6 follow-up results

F to P = 10 ohms (reported)

P is Q8's upper middle solder pad, the candidate P-channel source / supply. F is the upper end of C6.

F to G = 300 kohms (reported)

G is the same ground hole on page 1. F appears supply-related. The 10-ohm path is not yet established as direct copper.

No more measurements requested in this round. C6.1 remains unresolved; contact or series resistance may explain the F-P reading.

C6 connection unresolved. The 400-kohm in-circuit result is not a measurement of a discrete resistor.

Original photo pixels; vector callouts only. Board orientation is unchanged. Candidate identities are unconfirmed.