


PIC GPIO: 8 destinations still missing

U4 / PIC16F18855 / 28-pin SOIC | Pin numbers are physical package numbers, not schematic drawing order.

Orange = unresolved GPIO to trace Grey = already represented, sometimes still inferred

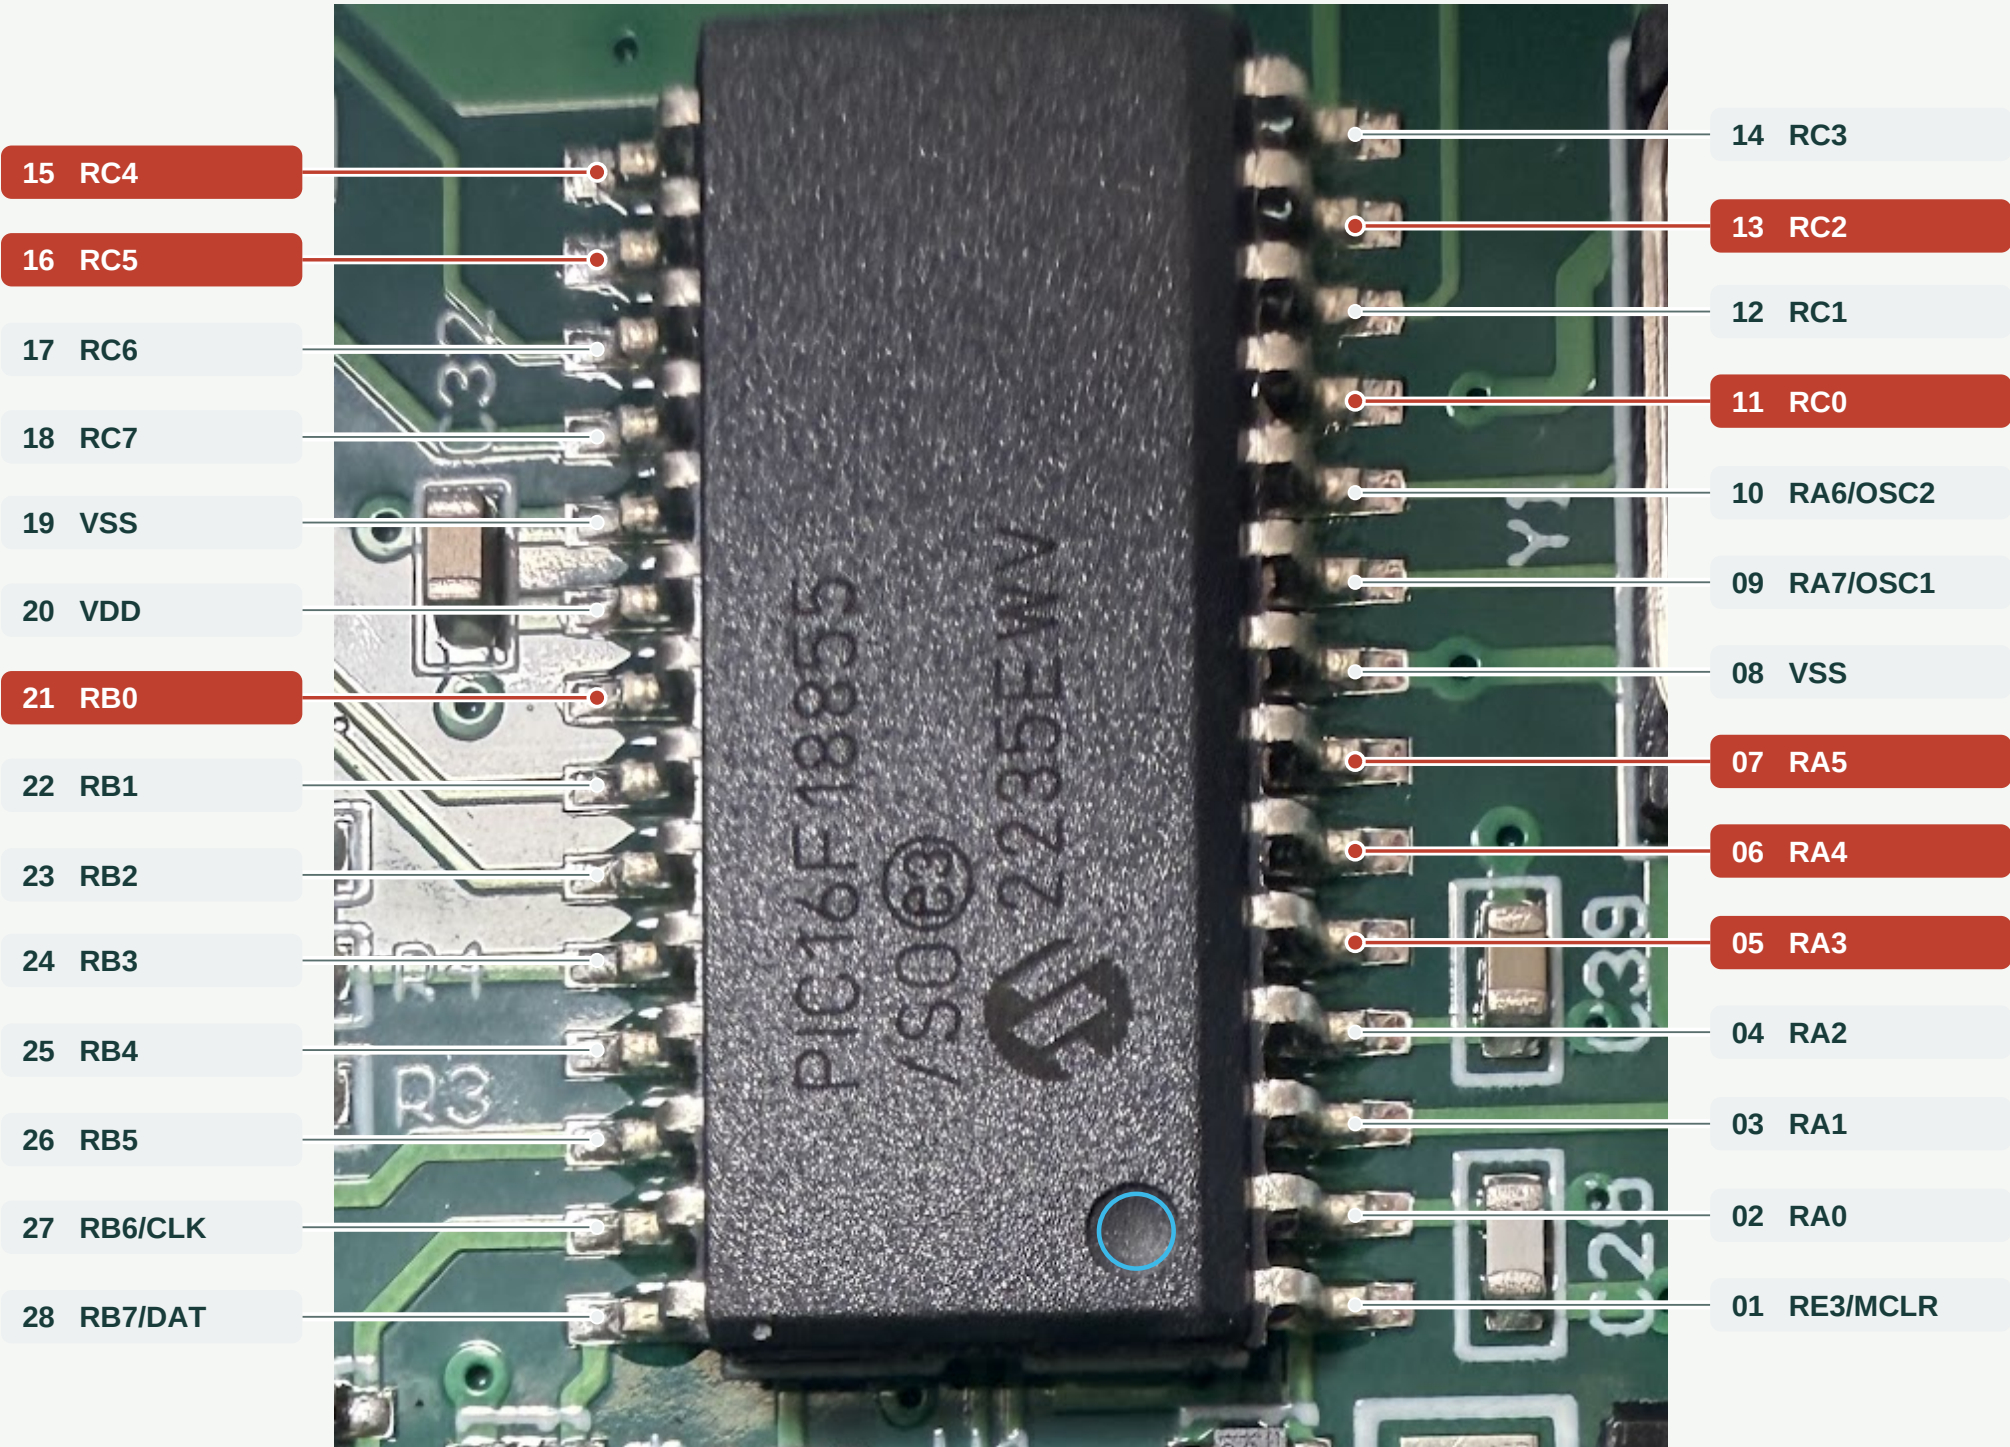

Orientation: pin 1 is at the lower right, beside the round moulded dot (blue ring).

Right row: bottom to top 1-14. Left row: top to bottom 15-28. Do not mirror the image.

Unpowered checks: disconnect battery and programmer. Compare low readings with your shorted-probe baseline (about 0.5 ohm).

Reply example: U4.3 -> Rxx, left pad -> 0.7 ohm. A visual trace is useful too. Give exact pads and actual ohms, rather than only a beep.

Orange lines are callout leaders, not traced copper. Source: your new close-up; original photograph pixels retained.

Pinout: Microchip DS40001802G, page 4. Current schematic: v0.9. Date: 2026-10-08. Full details: evidence/pic_gpio_request.json.

Connection checklist

Three via-only routes; five hidden/possibly unused.

Pin	GPIO	Current observation
5	RA3	<u>Hidden route or unused?</u>
6	RA4	<u>Hidden route or unused?</u>
7	RA5	<u>Hidden route or unused?</u>
11	RC0	<u>Hidden route or unused?</u>
13	RC2	<u>Hidden route or unused?</u>
15	RC4	<u>V022; onward unknown</u>
16	RC5	<u>V023; onward unknown</u>
21	RB0	<u>V026; onward unknown</u>

User meter + visual trace: 3-R28/R29/TP7; 17-R13; 22-TP2; 23-TP1; 25-TP4. 26-TP10 corroborated. Numerical ohms not supplied.
12: VREF/V053 | 2: C25 | 4: C39 | 14: TP11 | 18: TP17 | 24: R4 | 26: TP10/R35 | 27/28: ICSP nodes.
These are not included in the orange pins. No visible route is not proof of NC. No no-connect flags were added. RP7 wording interpreted as photographed TP7.