Allied Vision

Alvium
G5-508c

- IMX250 CMOS sensor
- GigE Vision
- High bandwidths
- 2 lens mount options

Hardware option: Closed Housing C-Mount

Alvium G5 - Speed up your vision application

5GigE Vision camera for demanding applications

Alvium G5-508 with Sony IMX250 runs 95 frames per second at 5.1 MP resolution.

The Alvium G5 camera series combines the advantages of the 5GigE interface for higher bandwidth and the flexibility of the Alvium platform offering various mount and sensor options. It enables an easy upgrade of existing systems (USB3 Vision or GigE Vision) and offers backwards compatibility with 1000BASE-T solutions. Powered by ALVIUM® Technology, the sugar cube Alvium G5 camera delivers highest image quality at a low power consumption.

Easy software integration with Vimba X and compatibility to the most popular third party image-processing libraries.

Allied Vision

Specifications

Product code	17724 | Filter options, black housing, other modular options: Product code and ordering on request
Interface	IEEE 802.3: 5GBASE-T or 2.5GBASE-T (NBASE-T) and 1000BASE-T, IEEE 802.3af Power Class 0 PoE
Resolution	2464 (H) × 2056 (V)
Spectral range	300 to 1100 nm
Sensor	Sony IMX250
Sensor type	CMOS
Shutter mode	GS (Global shutter)
Sensor size	Type 2/3
Pixel size	3.45 µm × 3.45 µm
Lens mount	C-Mount
Optical Filter	Type IRC 625 colored glass IR cut filter
Max. frame rate at full resolution	95 fps at 525 MByte/s, Mono8
ADC	12 Bit
Image buffer (RAM)	512 MByte
Non-volatile memory (Flash)	1024 KByte

Imaging performance	
Imaging performance data is based on the evaluation methods in the EMVA 1288 Release 3.1 standard for characterization of image sensors and cameras. Measurements are typical values for monochrome models measured without optical filter.	
Quantum efficiency at 529 nm	64 %
Temporal dark noise	2.1 e^-
Saturation capacity	10400 e^-
Dynamic range	72 dB
Absolute sensitivity threshold	2.7 e^-

Output	
Bit depth	8-bit, 10-bit, 12-bit; Adaptive (10-bit, 12-bit)
Monochrome pixel formats	Mono8, Mono10, Mono10p, Mono12, Mono12p, Mono12Packed

YUV color pixel formats	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	RGB8 (default), BGR8
Raw color pixel formats (Bayer)	BayerRG8, BayerRG10, BayerRG10p, BayerRG12, BayerRG12p, BayerRG12Packed

General purpose inputs/outputs (GPIOs)	
TTL I/Os	2 GPIOs (LVTTL)
Opto-isolated I/Os	1 input, 1 output

Operating conditions/dimensions	
Operating temperature	-20 °C to +60 °C (housing)
Power requirements (DC)	10.8 to 26.4 VDC AUX | IEEE 802.3af, Power Class 0 PoE
Power consumption	External power: 6.1 W at 12 VDC (typical) | Power over Ethernet: 7.0 W (typical)
Mass	100 g
Body dimensions (L × W × H in mm)	60 × 29 × 29

Quantum efficiency

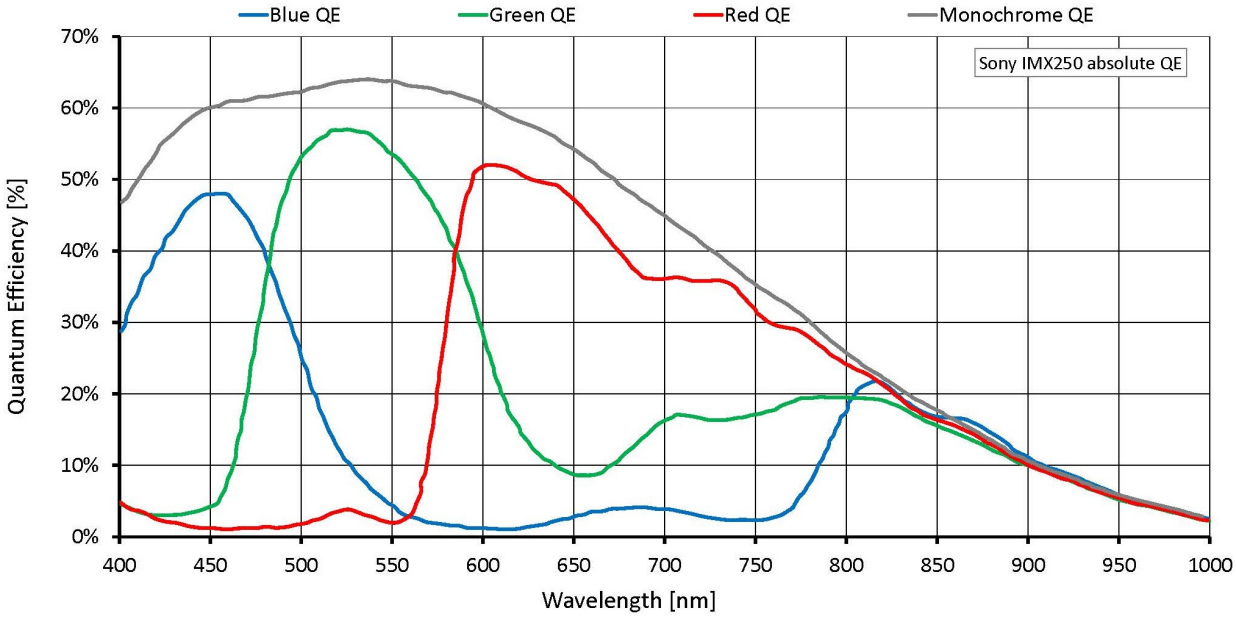
Blue QE
Green QE
Red QE
Monochrome QE
Sony IMX250 absolute QE
Quantum Efficiency [%]
70%
60%
50%
40%
30%
20%
10%
0%
400
450
500
550
600
650
700
750
800
850
900
950
1000
Wavelength [nm]

Features

Image control: Auto

- Auto exposure
- Auto gain
- Auto white balance (color models)

Image control: Other

- Adaptive noise correction
- Binning: Digital
- Binning: Sensor (mono models)
- Black level
- Color transformation (incl. hue, saturation; color models)
- Contrast
- Custom convolution
- De-Bayering up to 5×5 (color models)
- DPC (defect pixel correction)
- FPNC (fixed pattern noise correction)
- Gamma
- Lens shading correction
- LUT (look-up table)
- Multiple ROIs (regions of interest)
- Reverse X/Y
- ROI (region of interest)
- Sharpness/Blur

Camera control

- Acquisition frame rate
- Action commands, incl. ToE (trigger over Ethernet)
- Bandwidth control
- Burst mode
- Counters and timers
- Event channel
- Firmware update in the field
- I/O and trigger control
- Image chunk data
- Power Saving Mode
- PTP (IEEE 1588 Precision Time Protocol)
- Readout modes (SensorBitDepth)
- Sequencer
- Serial I/Os
- Temperature monitoring

- User sets

Technical drawing