


Data Sheet

SIP Communications System Client

Overview

The SIP Communications System Client (SCS) is a Multimedia Communicator. It is fully SIP aware (including the Presence and IM extensions), fully multimedia, allowing communications that converge voice, video, file transfer, chat, instant messaging and presence, both point-to-point and conferenced. Furthermore, it is interoperable with other clients, including Microsoft Messenger.

The SCS Client can run as a stand alone client or as a system client. As a system client it is fully interoperable with SIP Architectural Elements (Proxies, Registrars, etc.), as well as Converged Application Servers (e.g. Ubiquity, DynamicSoft, etc.), and the Services that run on them (e.g. InfoChannels).

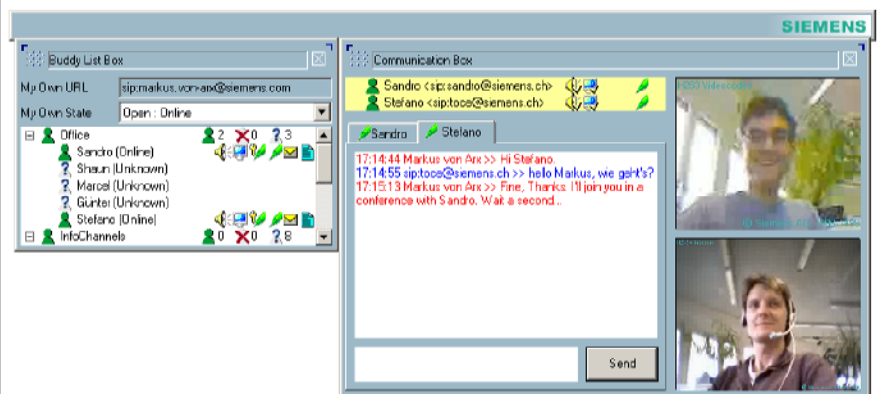

SCS Screenshots / SCS on the internet

Why Another Client?

Because there is no existing client which covers so many features:

- Full SIP feature set, including Instant Message and Presence extensions
- Combination of common telephony communication features (conferences, forward, transfer, hold, mute, history, etc.) with new IP communications features (i.e. buddy lists, polite communications, etc.)
- Flexible Graphical User Interface (i.e. easily changeable) opening a communications platform to simultaneous connections
- Easily integrated into Network-based Services (esp. InfoChannels), using standard protocols (HTTP, SMTP, etc), using default Web-Browsers and Email-Clients
- High-Quality Video conferencing enabling CIF with 15fps

SIP Communications System Client

Features

- Presence based features (also stand alone, no server needed)
- Support for 6 different media: Audio, Video, Secure-Chat, Instant Messages, Presence and Secure-File-Transfer (i.e. SIP negotiated end-to-end Secure-File-Transfer)
- Send Email by using standard Email Clients
- Multi-Media-Session client (possible for all media)
- Multi-Conference-Session, including ad hoc conferencing (for Audio, Video and Chat)
- Buddy list with presence and media information
- Flexible and modular graphical user interface (Snapping Boxes)
- Clean architecture (communication platform and application on top of it)
- The client can be used together with IP and PSTN hard phones (a gateway may be needed)
- Support for dynamic switching between English, German, French, Italian and any other language
- Support for Message Digest Authentication

Graphical User Interface

- Box Concept: client functionality is encapsulated into four flexible types of boxes, allowing the user to decide how they should be arranged, and whether they are visible or hidden
- Buddy List Box: list of buddies containing their presence state (if available), including the display of which media they currently support or wish to be contacted on; users can also define and manipulate their own presence state
- Overview Box: list of all current connections and currently active media; incoming connections appear in this box first
- Communication Box: contains the details concerning the specified connection; displays video pictures and chat sessions; when the communication is a conference, all participants are listed
- Confidence Image Box: shows the picture of the local user enabling correct adjustment of the video camera
- Main Bar: all boxes snap to the Main Bar, which offers the general menu

Technical Data

- Session Initiation Protocol (SIP), RFC 3261
- INFO Method, RFC 2976
- SIP Specific Event Notification, RFC 3265
- Draft-ietf-sip-content-indirect-mech-00
- Draft-ietf-sip-message-07
- Session Description Protocol (SDP), RFC 2327
- Real Time Protocol (RTP), RFC 1889
- Running on Windows NT, 2000 and XP
- Local ad hoc conferencing up to five participants (audio, video, chat)
- Video: H.263, H.261 (planned), QCIF, CIF
- Audio Codecs: G.711, G.723, GSM (planned), G.729 (planned)
- Mediatrix SIP stack

Contact

Siemens Switzerland Ltd

Software House DS MS

Patrick Mächler

Albisriederstr. 245

CH-8047 Zürich

patrick.maechler@siemens.com

Tel. +41 (0)58 558 3846

Fax +41 (0)58 554 4184

www.mySIP.ch -
more than just gosSIP