
R8_AERO_V2_OR.grtload

File: *"R8_AERO_V2_OR.grtload"*

Load data	
Cartridge	308 Win. (308 Winchester, 7,62 x 51)
Projectile	Styria Arms, AERO SB 165 gr, .308, 165.00 grain
Charge	43.06 grain, Reload Swiss RS52
Ladder step	0.30 grain × 5
Seating depth	15.98 mm
Bullet length	34.65 mm
Case capacity	55.78 grain H2O
L3/CL	51.00 mm
L6/OAL	69.67 mm
CBTO	

308 Win. (308 Winchester, 7,62 x 51)

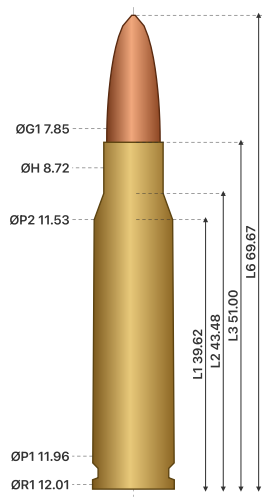


Pmax	4150 bar
PK	4773 bar
PE	5190 bar
EE	3920 J
Q	47.510 mm²
V	57.80 gr H2O
E	3.85 mm
E1	10.39 mm
G1	7.85 mm
H1	8.72 mm
H2	8.72 mm
L1	39.62 mm
L2	43.48 mm
L3	51.18 mm
L6	71.12 mm
M	25.00 mm
P1	11.96 mm
P2	11.53 mm
R	1.37 mm
R1	12.01 mm
alpha	40.0 °

Results 43.06 grain

Pmax	P0	V0	BT	BLT	OBT
3741 bar	627 bar	809 m/s	1.1064 ms	1.0543 ms	1.0496 ms
Fill	**Burnt**	**E0**	**Recoil**	**IPSC/BDS**	**MIP**
102.9 %	99.4 %	3495 J	18 J	438	864

Load ladder

Charge	Pmax	V0	E0	BT	Burnt
43.06 gr	**3741 bar**	**809 m/s**	**3495 J**	**1.106 ms**	**99.4 %**
42.76 gr	3642 bar	802 m/s	3441 J	1.117 ms	99.3 %
42.46 gr	3546 bar	796 m/s	3388 J	1.129 ms	99.2 %
42.16 gr	3453 bar	790 m/s	3336 J	1.140 ms	99.0 %
41.86 gr	3363 bar	784 m/s	3283 J	1.151 ms	98.9 %

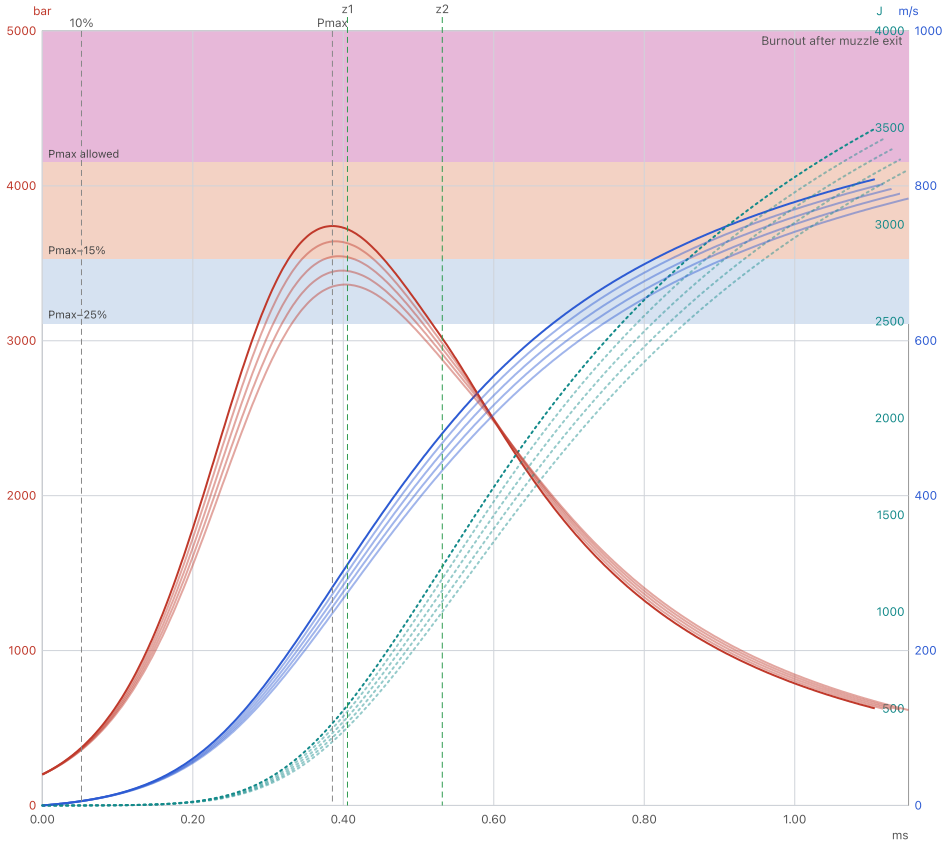

Simulation – neither load data nor an approval. Typical deviation from laboratory measurements: rifle ±4 % V0, ±12–20 % pressure; handgun ±8 % V0, pressure not backed. At low fill ratios (below about 90 %) the pressure is calculated too low. Never load on the basis of this app alone; never exceed the makers' maximum loads; start with their starting load. Use at your own risk; liability excluded to the extent permitted by law.