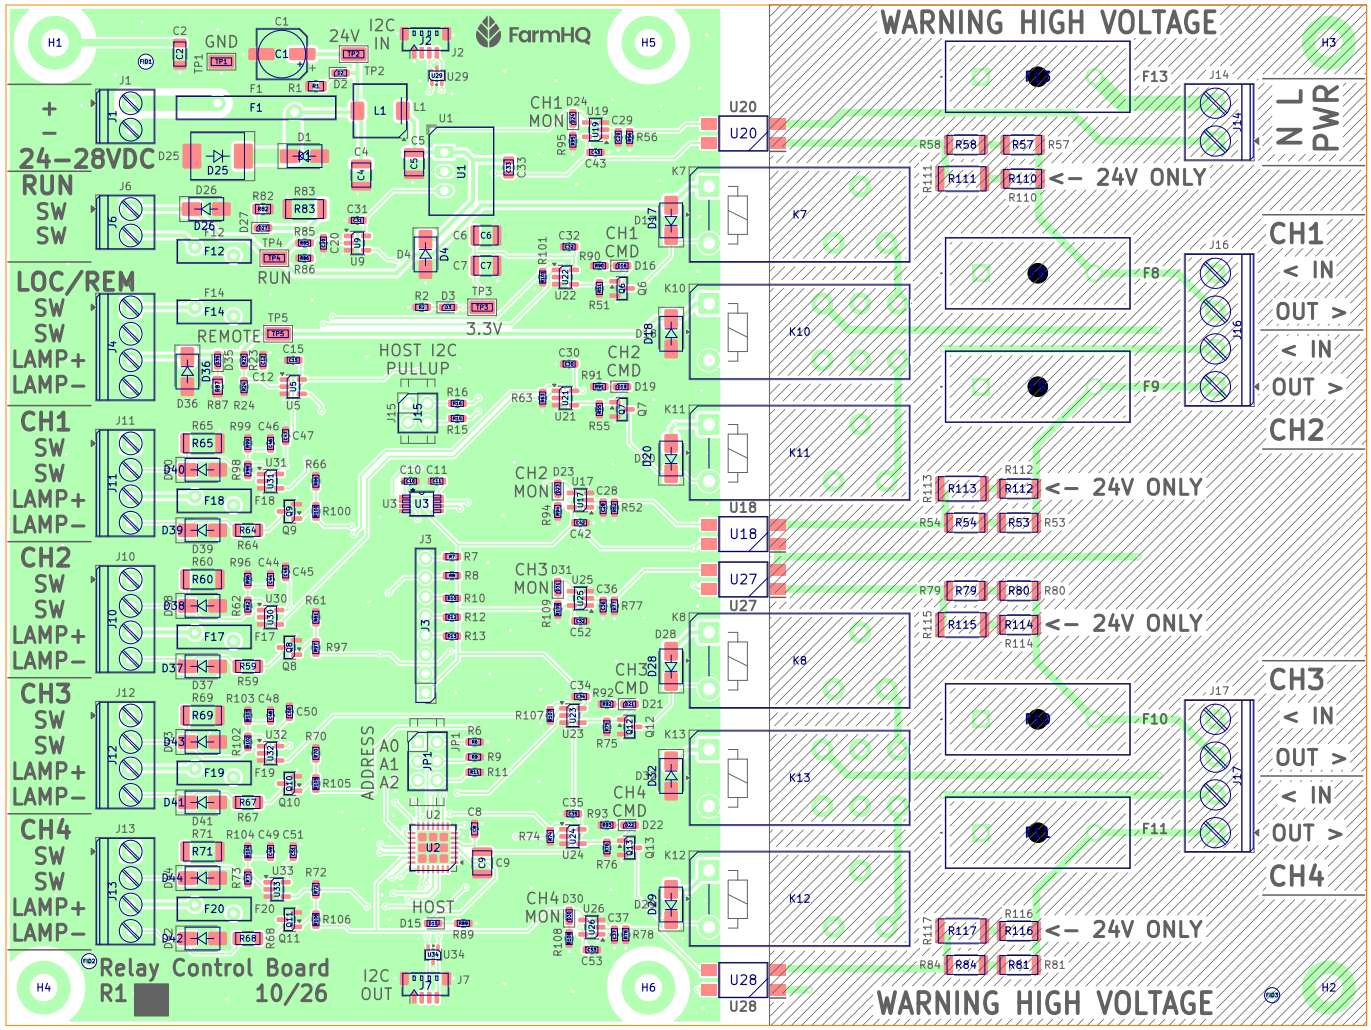


NOTES

1. FABRICATE PER IPC–6012 CLASS 2. ACCEPTABILITY PER IPC–A–600 CLASS 2 (CURRENT REVISION).
2. 2 COPPER LAYERS. FR4, Tg >= 150 C, UL 94V–0. FINISHED THICKNESS 1.6 mm +/–10%.
3. COPPER: 1 oz (35 um) FINISHED, BOTH LAYERS.
4. SURFACE FINISH: ENIG.
5. SOLDER MASK: GREEN LPI, BOTH SIDES. VIAS TENTED BOTH SIDES.
6. SILKSCREEN: WHITE, BOTH SIDES.
7. HOLE SIZES ARE FINISHED SIZES.
8. 100% ELECTRICAL TEST TO IPC–D–356 NETLIST.
9. RoHS COMPLIANT.
10. FAB DATE CODE / UL MARK PERMITTED ON BOTTOM SIDE, CLEAR OF HV WARNING TEXT.

BOARD CHARACTERISTICS

Copper layer count:	2	Board thickness:	1.6000 mm
Board overall dimensions:	180.0000 mm x 135.0000 mm		
Min track/spacing:	0.2500 mm / 0.2000 mm	Min hole diameter:	0.3000 mm
Copper finish:	ENIG	Impedance control:	No
Castellated pads:	No	Press–fit pads:	No
Plated board edge:	No	Edge card connectors:	No


Board2Pdf: Colored TOP – Page 1/6


FarmHQ

Sheet: Colored TOP
File: FarmHqRelay_R1.kicad_pcb

Title: Relay Control Board

Size: USLetter	Date: 2026–10–27	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: /1

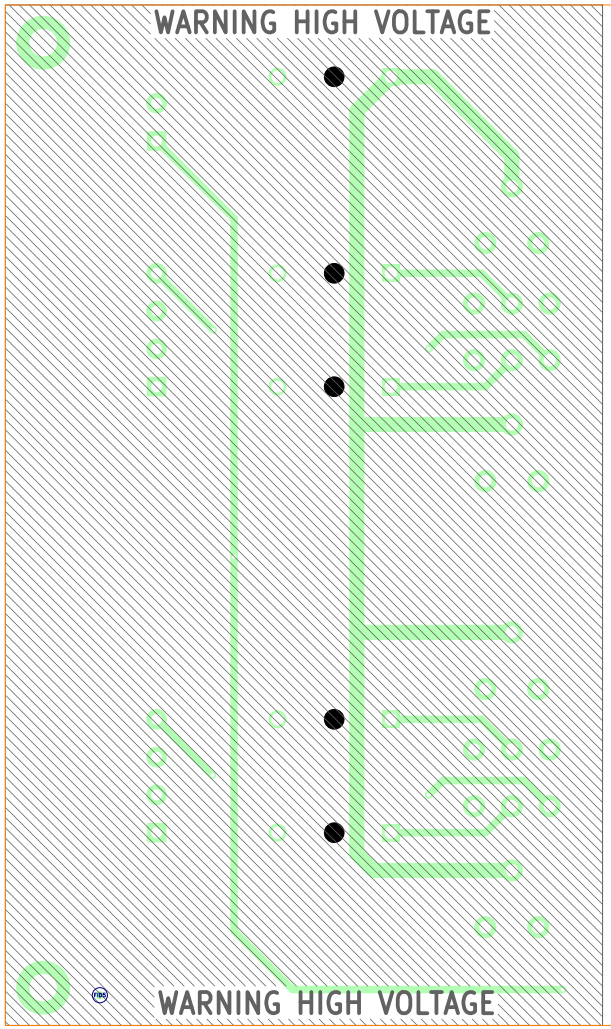

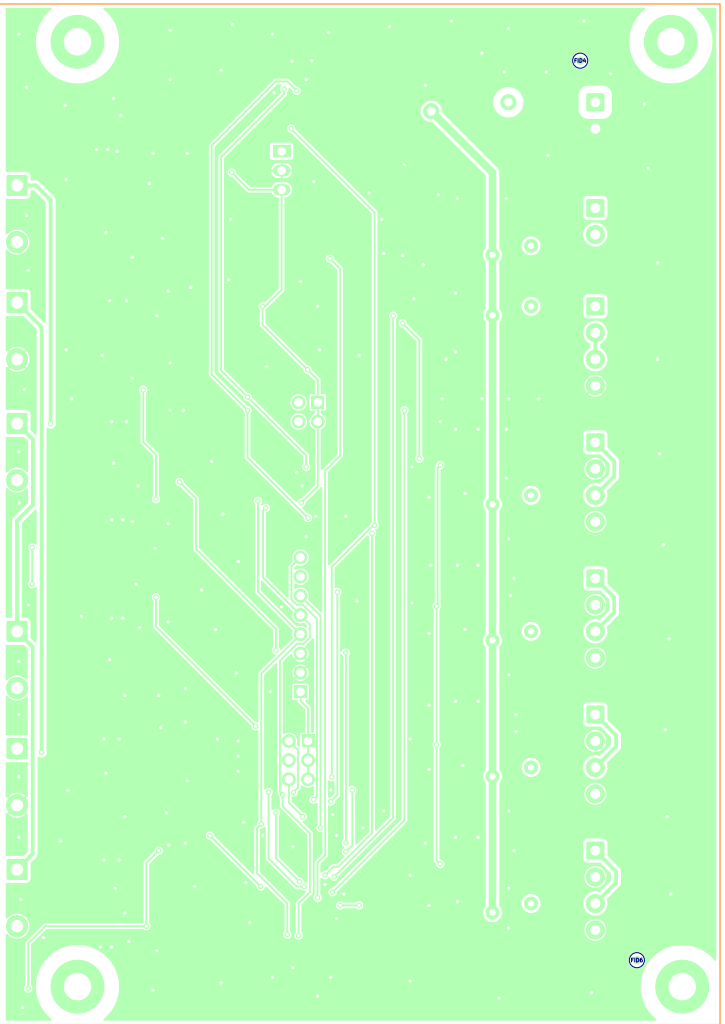


Board2Pdf: Colored BOT – Page 2/6

FarmHQ

Sheet: Colored BOT
File: FarmHqRelay_R1.kicad_pcb

Title: Relay Control Board

Size: USLetter	Date: 2026-10-27	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: /1

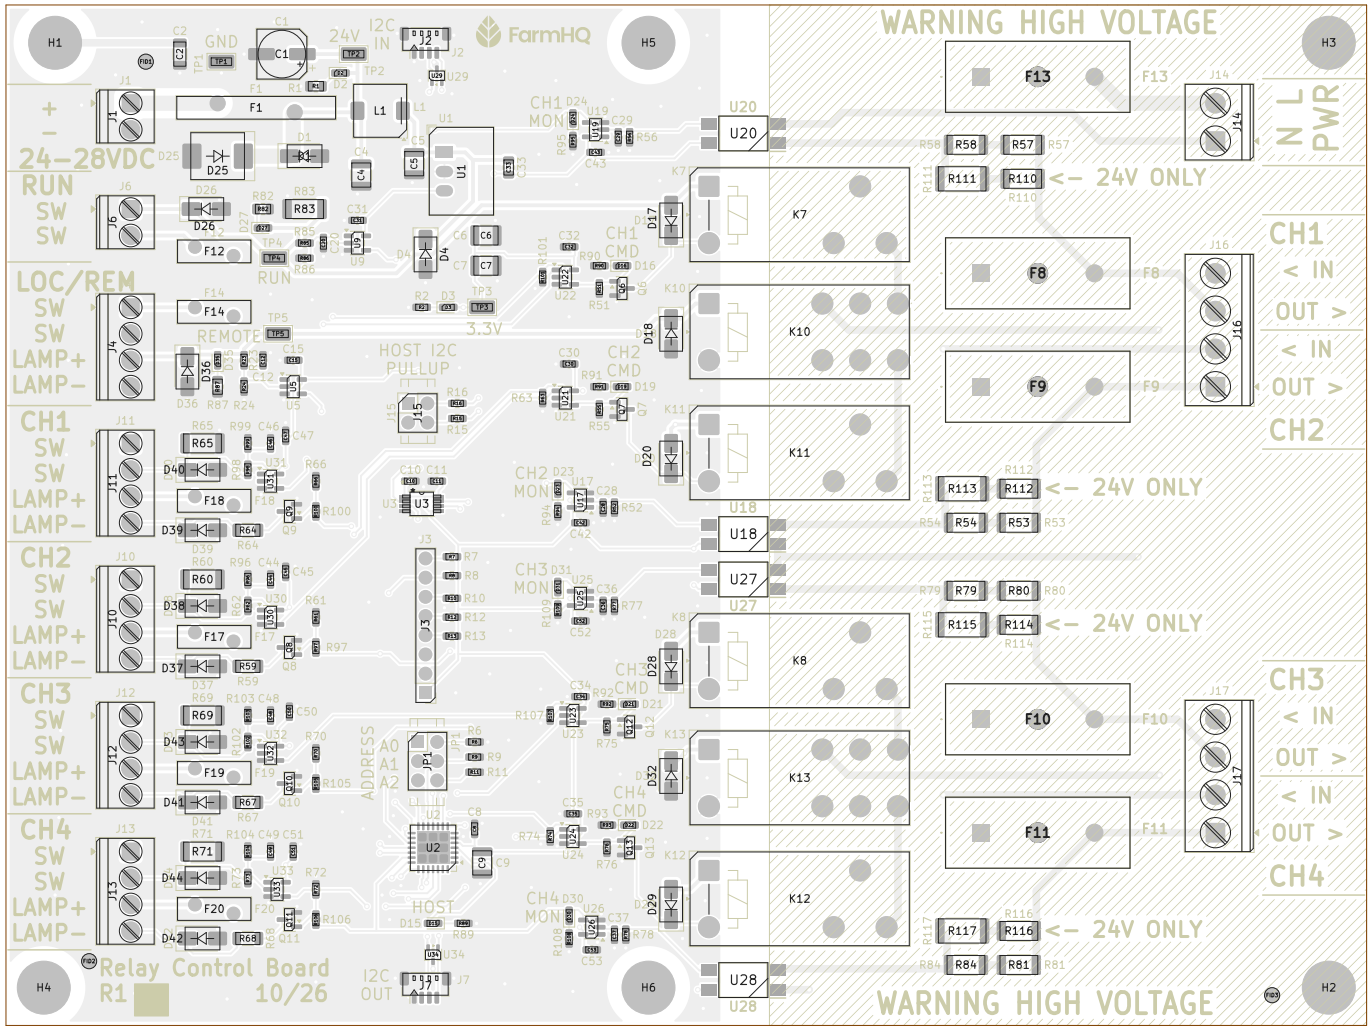

NOTES

1. FABRICATE PER IPC–6012 CLASS 2. ACCEPTABILITY PER IPC–A–600 CLASS 2 (CURRENT REVISION).
2. 2 COPPER LAYERS. FR4, Tg >= 150 C, UL 94V–0. FINISHED THICKNESS 1.6 mm +/–10%.
3. COPPER: 1 oz (35 um) FINISHED, BOTH LAYERS.
4. SURFACE FINISH: ENIG.
5. SOLDER MASK: GREEN LPI, BOTH SIDES. VIAS TENTED BOTH SIDES.
6. SILKSCREEN: WHITE, BOTH SIDES.
7. HOLE SIZES ARE FINISHED SIZES.
8. 100% ELECTRICAL TEST TO IPC–D–356 NETLIST.
9. RoHS COMPLIANT.
10. FAB DATE CODE / UL MARK PERMITTED ON BOTTOM SIDE, CLEAR OF HV WARNING TEXT.

BOARD CHARACTERISTICS

Copper layer count:	2	Board thickness:	1.6000 mm
Board overall dimensions:	180.0000 mm x 135.0000 mm		
Min track/spacing:	0.2500 mm / 0.2000 mm	Min hole diameter:	0.3000 mm
Copper finish:	ENIG	Impedance control:	No
Castellated pads:	No	Press–fit pads:	No
Plated board edge:	No	Edge card connectors:	No


Board2Pdf: Light Colors Placement TOP – Page 3/6

FarmHQ

Sheet: Light Colors Placement TOP
File: FarmHqRelay_R1.kicad_pcb

Title: Relay Control Board

Size: USLetter	Date: 2026–10–27	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: /1

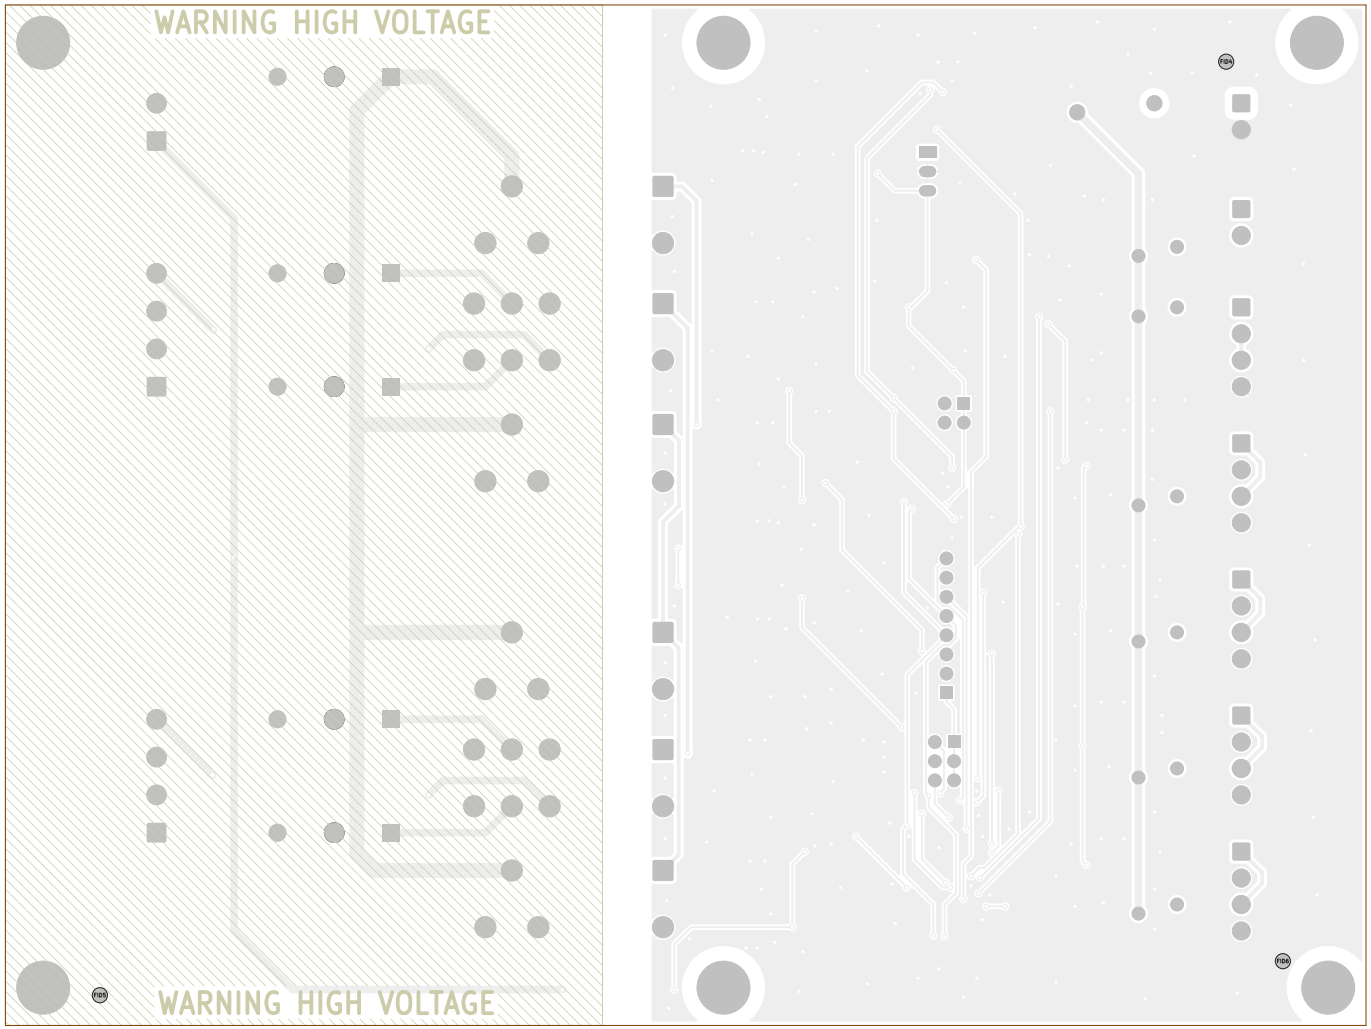


Board2Pdf: Light Colors Placement BOT – Page 4/6

FarmHQ

Sheet: Light Colors Placement BOT
File: FarmHqRelay_R1.kicad_pcb

Title: Relay Control Board

Size: USLetter	Date: 2026-10-27	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: /1

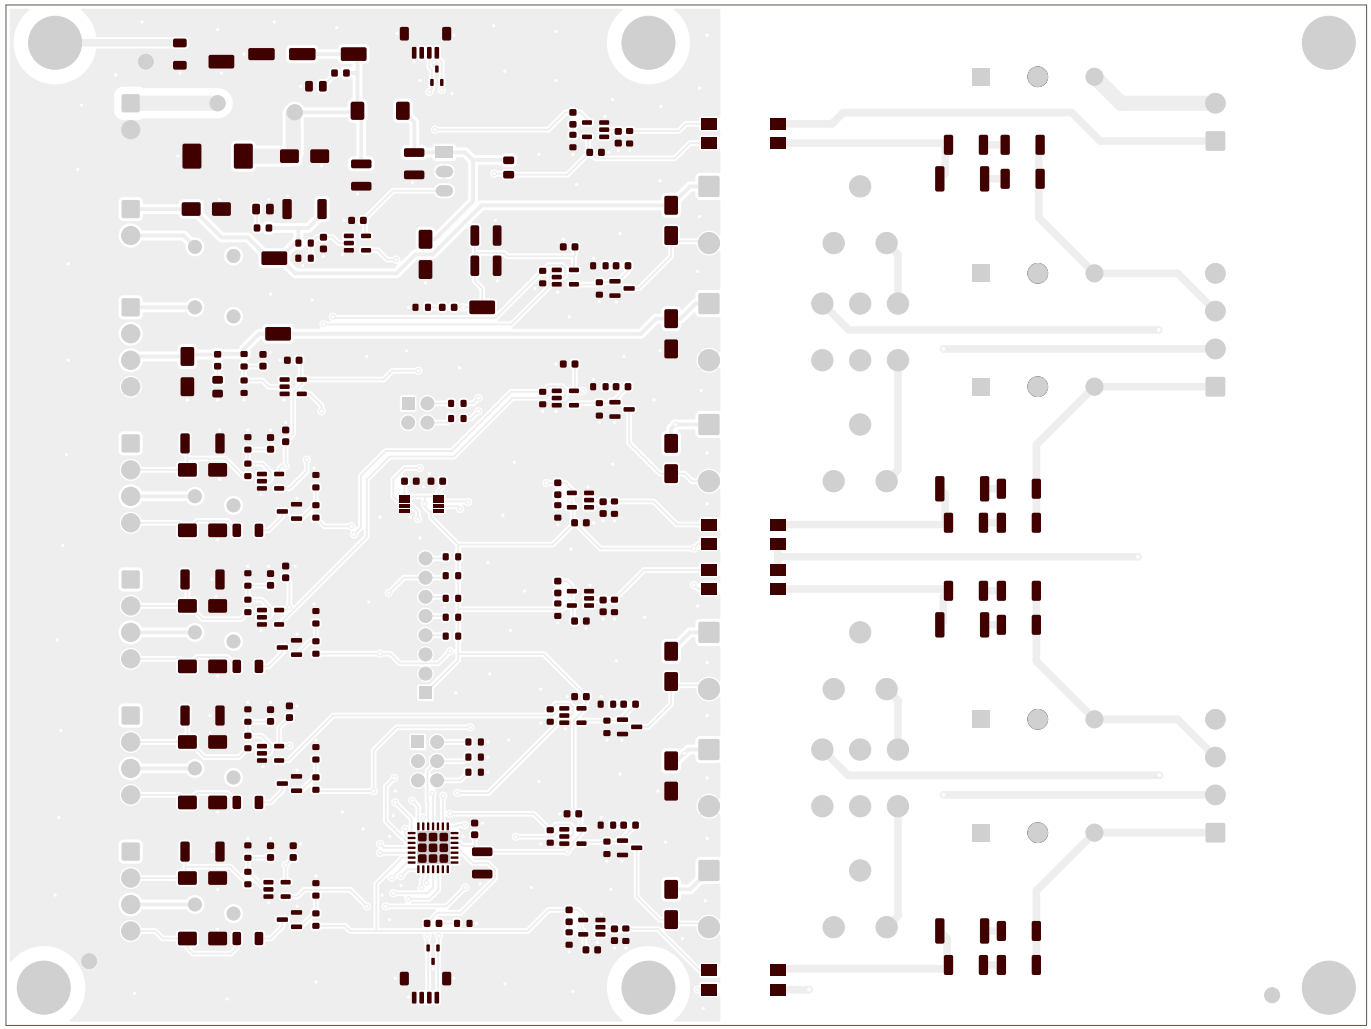


Board2Pdf: Light Colors PCB Paste TOP – Page 5/6

FarmHQ

Sheet: Light Colors PCB Paste TOP
File: FarmHqRelay_R1.kicad_pcb

Title: Relay Control Board

Size: USLetter	Date: 2026-10-27	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: /1

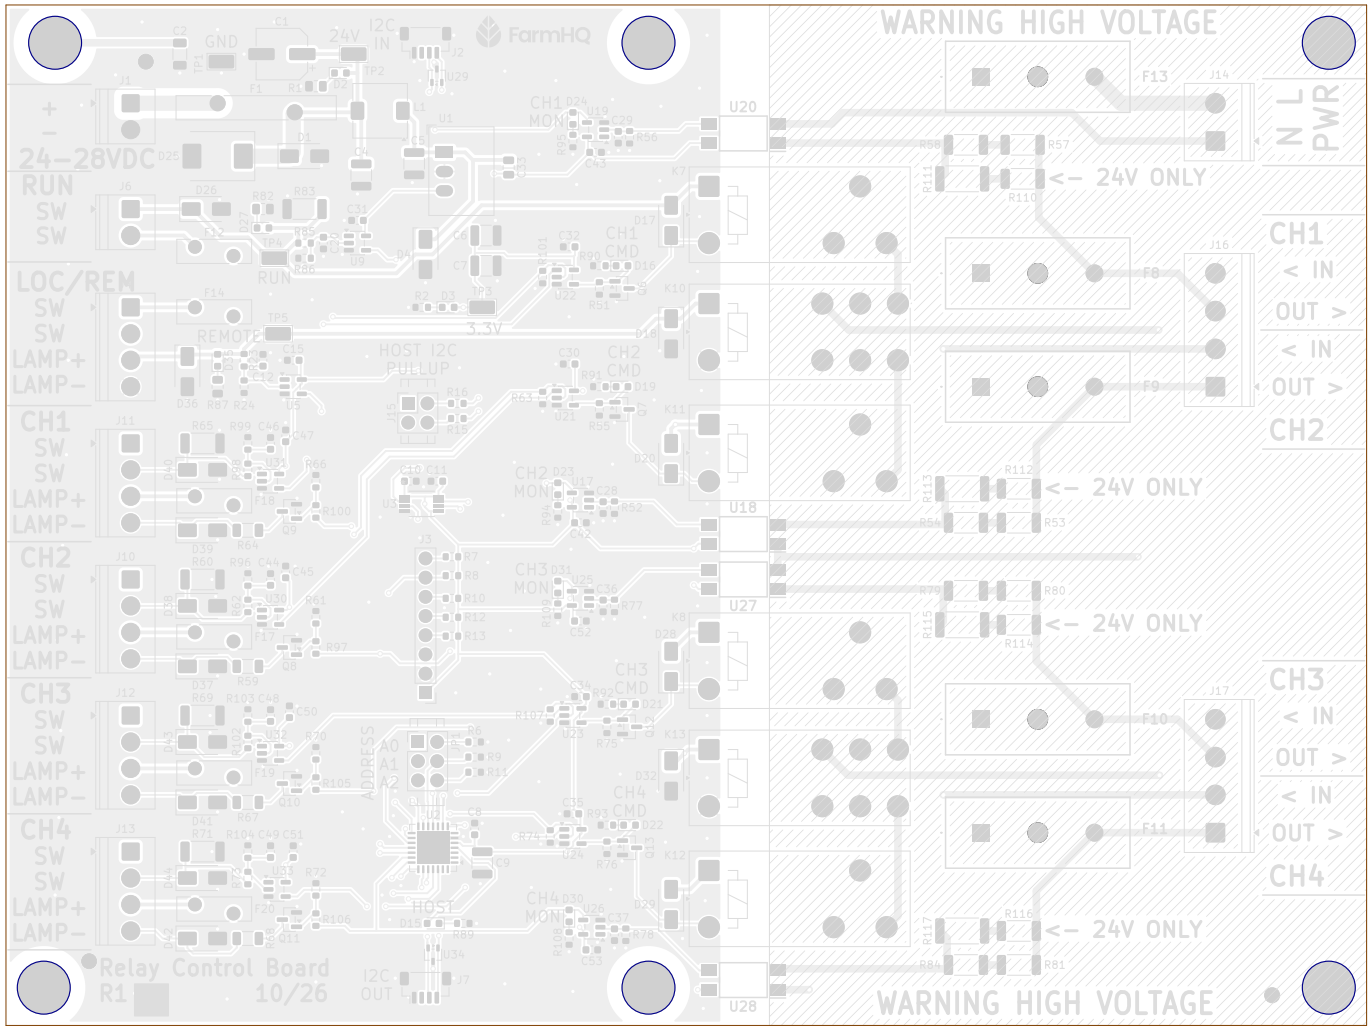

Board2Pdf: Light Colors PCB Fabrication TOP – Page 6/6

FarmHQ

Sheet: Light Colors PCB Fabrication TOP
File: FarmHqRelay_R1.kicad_pcb

Title: Relay Control Board

Size: USLetter	Date: 2026-10-27	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: /1