



Software Safety Requirements and Architecture

Lane Assistance

Document Version: [Version]

Template Version 1.0, Released on 2017-06-21



Document history

Date	Version	Editor	Description
02.09.17	1.0	Klemens Esterle	Initial Version

Table of Contents

Document history

Table of Contents

Purpose

Inputs to the Software Requirements and Architecture Document

 Technical safety requirements

 Refined Architecture Diagram from the Technical Safety Concept

Software Requirements

Refined Architecture Diagram

Purpose

The purpose of this document is to derive software requirements from technical requirements and allocate architecture and asil level to them.

Inputs to the Software Requirements and Architecture Document

[Instructions:

REQUIRED:

You are only required to develop this document for the LDW (lane departure warning) amplitude malfunction. So here, provide the technical safety requirements for the LDW amplitude malfunction as well as the refined system architecture diagram from the technical safety concept.

OPTIONAL:

Expand this document to include software safety requirements for the LDW frequency malfunction as well. Go even further and document software safety requirements for the Lane Keeping Assistance (LKA) function as well.

]


Technical safety requirements

Technical Safety Requirements related to Functional Safety Requirement 01-01 are:

ID	Technical Safety Requirement	ASIL	Fault Tolerant Time Interval	Architecture Allocation	Safe State
Technical Safety Requirement 01	The LDW safety component shall ensure that the amplitude of the 'LDW_Torque_Request' sent to the 'Final electronic power steering Torque' component is below 'Max_Torque_Amplitude'	C	50ms	LDW safety element	LDW torque request amplitude shall be set to zero
Technical Safety Requirement 02	The validity and integrity of the data transmission for 'LDW_Torque_Request' signal shall be ensured	C	50ms	Data transmission integrity check item	N/A
Technical Safety Requirement 03	As soon as a failure is detected by the LDW function, it shall deactivate the LDW feature and the	C	50ms	LDW safety element	LDW torque output is set to zero

	'LDW_Torque_Request' shall be set to zero				
Technical Safety Requirement 04	As soon as the LDW function deactivates the LDW feature, the 'LDW Safety' software block shall send a signal to the car display ECU to turn on a warning light	C	50ms	LDW safety element	LDW torque output is set to zero
Technical Safety Requirement 05	Memory test shall be conducted at start of the EPS ECU to check for any faults in memory	A	Length of vehicle ignition cycle	Memory test item	N/A

Refined Architecture Diagram from the Technical Safety Concept

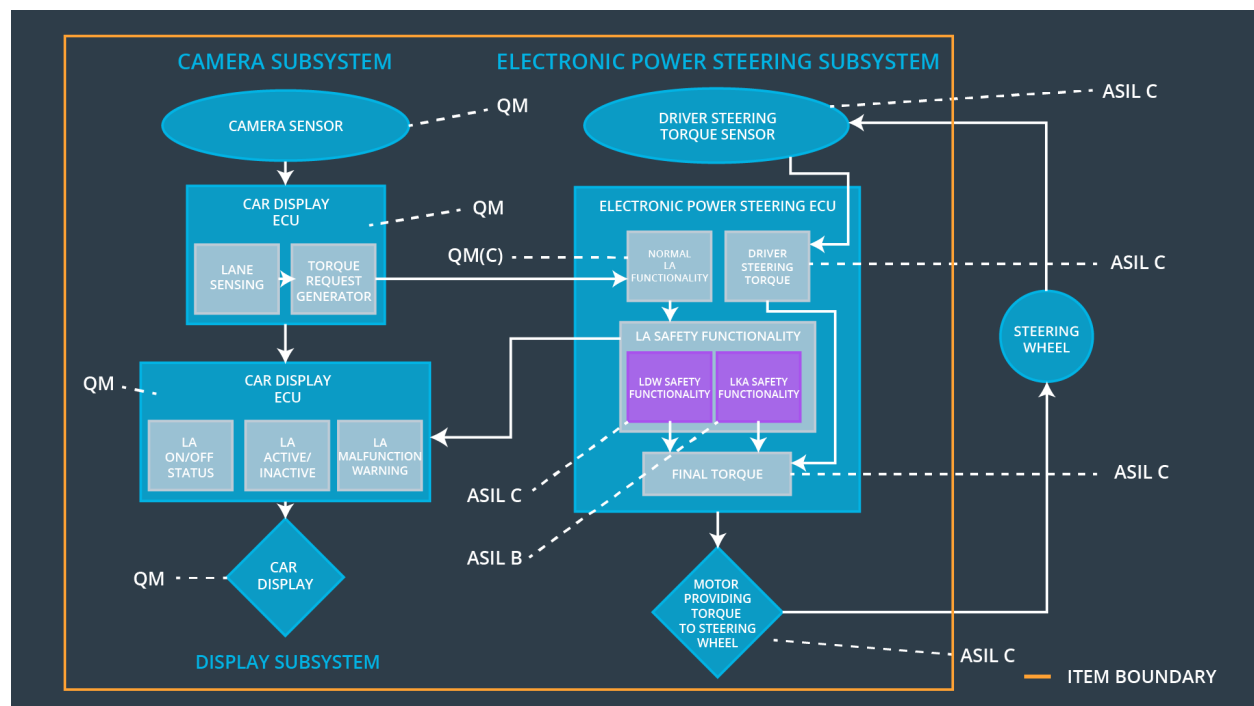

Software Requirements

Lane Departure Warning (LDW) Amplitude Malfunction Software Requirements:

OPTIONAL:

CHALLENGE ONE

Develop software safety requirements for the Lane Departure Warning (LDW) frequency function and modify the system architecture as needed.

CHALLENGE TWO

Develop software safety requirements for the Lane Keeping Assistance (LKA) function and modify the system architecture as needed.

]

ID	Technical Safety Requirement	A S I L	Fault Tolerant Time Interval	Allocation to Architecture	Safe State
Technical Safety Requirement 01	The LDW safety component shall ensure that the amplitude of the 'LDW_Torque_Request' sent to the 'Final electronic power steering Torque' component is below 'Max_Torque_Amplitude'	C	50ms	LDW safety element	LDW torque request amplitude shall be set to zero

ID	Software Safety Requirement	A S I L	Allocation Software Elements	Safe State
Software Safety Requirement 01-01	The input signal 'Primary_LDW_Torq_Req' shall be read and pre-processed to determine the torque request coming from the 'Basic/Main LAFunctionality' SW Component. Signal "processed_LDW_Torq_Req" shall be generated at the end of the processing.	C	LDW_SAFETY_INPUT_P ROCESSING	N/A
Software Safety Requirement 01-02	In case the "processed_LDW_Torq_Req" signal has a value greater than "Max_Torque_Amplitude_LDW"(maximum allowed safe torque),	C	TORQUE_LIMITER	"limited_LDW_T orq_Req" = 0(Nm)

	the torque signal “limited_LDW_Torq_Req” shall be set to 0, else “limited_LDW_Torq_Req” shall take the value of “processed_LDW_Torq_Req”.			
Software Safety Requirement 01-03	The “limited_LDW_Torq_Req” shall be transformed into a signal “LDW_Torq_Req” which is suitable to be transmitted outside of the LDW Safetycomponent (“LDW Safety”) to the “Final EPS Torque” component. Also see SofSafReq02-01 andSofSafReq02-02	C	LDW_SAFETY_OUTPUT_ GENERATOR	LDW_Torq_Req = 0 (Nm)

ID	Technical Safety Requirement	A S I L	Fault Tolerant Time Interval	Allocation to Architecture	Safe State
Technical Safety Requirement 02	The validity and integrity of the data transmission for LDW_Torque_Request signal shall be ensured	C	50ms	Data Transmission Integrity Check	N/A

ID	Software Safety Requirement	A S I L	Allocation Software Elements	Safe State
Software Safety Requirement 02-01	Any data to be transmitted outside of the LDW Safetycomponent ("LDW Safety") including "LDW_Torque_Req" and "activation_status" (see SofSafReq03-02) shall beprotected by an End2End (E2E) protection mechanism	C	E2ECalc	LDW_Torq_Re q= 0 (Nm)
Software Safety Requirement 02-02	The E2E protection protocol shall contain and attach the control data: alive counter (SQC) and CRC to the data to be transmitted.	C	E2ECalc	LDW_Torq_Re q= 0 (Nm)

ID	Technical Safety Requirement	ASIL	Fault Tolerant Time Interval	Allocation to Architecture	Safe State
Technical Safety Requirement 03	As soon as a failure is detected by the LDW function, it shall deactivate the LDW feature and the LDW_Torque_Request shall be set to zero	C	50ms	LDW Safety	LDW torque output is set to zero

ID	Software Safety Requirement	ASIL	Allocation Software Elements	Safe State
Software Safety Requirement 03-01	Each of the SW elements shall output a signal to indicate any error which is detected by the element. Error signal = error_status_input(LDW_SAFETY_INPUT_PROCESSING), error_status_torque_limiter(TORQUE_LIMITER), error_status_output_gen(LDW_SAFETY_OUTPUT_GENERATOR)	C	All	N/A
Software Safety Requirement 03-02	A software element shall evaluate the error status of all the other software elements and in case any 1 of them indicates an error, it shall deactivate the LDW feature ("activation_status"=0)	C	LDW_SAFETY_ACTIVATION	Activation_status = 0 (LDW function deactivated)
Software Safety Requirement 03-03	In case of no errors from the software elements, the status of the LDW feature shall be set to activated ("activation_status"=1)	C	LDW_SAFETY_ACTIVATION	N/A
Software Safety Requirement 03-04	In case an error is detected by any of the software elements, it shall set the value of its corresponding torque to 0 so that "LDW_Torq_Req" is set to 0	C	All	LDW_Torque_Req = 0
Software	Once the LDW functionality has	C	LDW_SAFETY_ACTIVATION	Activation_status = 0

Safety Requirement 03-05	been deactivated, it shall stay deactivated till the time the ignition is switched from off to on again.		CTIVATION	(LDW function deactivated)
--------------------------	--	--	-----------	----------------------------

ID	Technical Safety Requirement	A S I L	Fault Tolerant Time Interval	Allocation to Architecture	Safe State
Technical Safety Requirement 04	As soon as the LDW function deactivates the LDW feature, the LDW Safety software block shall send a signal to the car display ECU to turn on a warning light	C	50ms	LDW Safety	LDW torque output is set to zero

ID	Software Safety Requirement	A S I L	Allocation Software Elements	Safe State
Software Safety Requirement 04-01	When the LDW function is deactivated (activation_status set to 0), the activation_status shall be sent to the car display ECU.	C	LDW_SAFETY_ACTIVATION, CarDisplay ECU	N/A

ID	Technical Safety Requirement	A S I L	Fault Tolerant Time Interval	Allocation to Architecture	Safe State
Technical Safety Requirement 05	Memory test shall be conducted at start up of the EPS ECU to check for any faults in memory	A	50ms	Ignition Cycle	LDW torque output is set to zero

ID	Software Safety Requirement	A S I L	Allocation Software Elements	Safe State
Software Safety Requirement 05-01	A CRC verification check over the software code in the Flash memory shall be done every time the ignition is switched from off to on to check for any corruption of content.	A	MEMORYTEST	Activation_status = 0
Software Safety Requirement 05-02	Standard RAM tests to check the data bus, address bus and device integrity shall be done every time the ignition is switched from off to on (E.g.walking 1s test, RAM pattern test. Refer RAM and processor vendor recommendations)	A	MEMORYTEST	Activation_status = 0
Software Safety Requirement 05-03	The test result of the RAM or Flash memory shall be indicated to the LDW_Safety component via the "test_status" signal	A	MEMORYTEST	Activation_status = 0
Software Safety Requirement 05-04	In case any fault is indicated via the "test_status" signal the INPUT_LDW_PROCESSING shall set an error on error_status_input (=1) so that the LDW functionality is deactivated and the LDWTorque is set to 0	A	LDW_SAFETY_INPUT_PROCESSING	Activation_status = 0

Refined Architecture Diagram

