US 20220354004A1

(19) United States

(12) Patent Application Publication

(10) Pub. No.: US 2022/0354004 A1

(43) Pub. Date: Nov. 3, 2022

Wang et al.

(54) **DISPLAY APPARATUS AND METHOD OF FABRICATING DISPLAY APPARATUS**

(71) Applicants: **Chengdu BOE Optoelectronics Technology Co., Ltd.**, Chengdu, Sichuan (CN); **BOE Technology Group Co., Ltd.**, Beijing (CN)

(72) Inventors: **Chao Wang**, Beijing (CN); **Pan Zhao**, Beijing (CN); **Zhiliang Jiang**, Beijing (CN); **Fei Li**, Beijing (CN); **Dianjie Hou**, Beijing (CN); **Song Wang**, Beijing (CN); **Chang Liu**, Beijing (CN); **Qian Ma**, Beijing (CN)

(73) Assignees: **Chengdu BOE Optoelectronics Technology Co., Ltd.**, Chengdu, Sichuan (CN); **BOE Technology Group Co., Ltd.**, Beijing (CN)

(21) Appl. No.: **17/436,055**

(22) PCT Filed: **Dec. 2, 2020**

(86) PCT No.: **PCT/CN2020/133274**

§ 371 (c)(1),
(2) Date: **Sep. 2, 2021**

Publication Classification

(51) **Int. Cl.**

H05K 5/00	(2006.01)
B32B 1/00	(2006.01)
B32B 3/30	(2006.01)
B32B 7/12	(2006.01)
B32B 15/08	(2006.01)
B32B 15/04	(2006.01)
B32B 38/00	(2006.01)
B32B 37/18	(2006.01)
B32B 3/04	(2006.01)

(52) **U.S. Cl.**

CPC ***H05K 5/0018*** (2022.08); ***B32B 1/00*** (2013.01); ***B32B 3/30*** (2013.01); ***B32B 7/12*** (2013.01); ***B32B 15/08*** (2013.01); ***B32B 15/043*** (2013.01); ***B32B 38/0012*** (2013.01); ***B32B 37/182*** (2013.01); ***B32B 3/04*** (2013.01); *B32B 2457/20* (2013.01); *B32B 2311/00* (2013.01)

(57) **ABSTRACT**
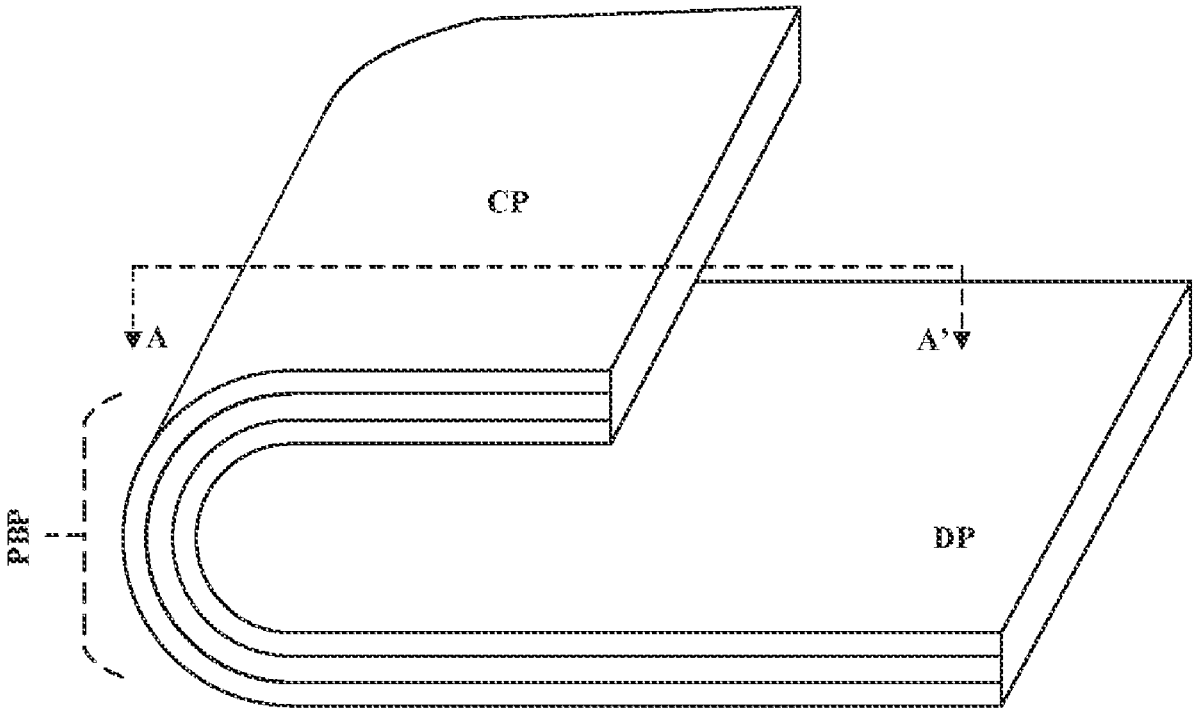
A display apparatus is provided. The display apparatus includes a display panel having a display portion, a connecting portion, and a bending portion; a main support layer; and an auxiliary support layer including a main portion and a folded-back portion connected to the main portion as a unitary structure. An edge portion of the display apparatus includes a stacked structure. The stacked structure includes the connecting portion; the folded-back portion on the connecting portion; at least a part of the main portion on a side of the folded-back portion away from the connecting portion; a part of the main support layer; and a part of the display portion on a side of the part of the main support layer away from the main portion. Layers of the stacked structure is curved toward a back side of the display apparatus.