

IMPHAL (VEIM)

INDIA


KKU 4B, POREG 4B,
LLP 4B
RWY22
(Cat A/B/C)

STANDARD DEPARTURE CHART
INSTRUMENT (SID)

TRANSITION ALT
11000

TWR 124.350/118.550

RADIALS AND DISTANCES ARE FROM VOR(115.9 IIM)
ELEV,ALT IN FEET
DIST IN NAUTICAL MILE
BRG IN MAGNETIC
VAR 0.58°W(2010)

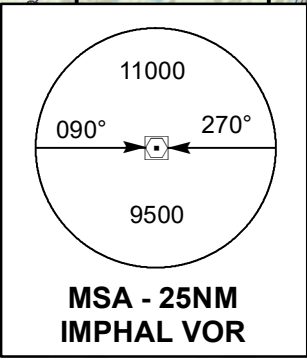

DME REQUIRED

NOTE - FOR CAT C AIRCRAFT SPEED RESTRICTED 210KIAS MAX

VED 61
35000'
GND

IMPHAL
VOR/DME 115.9
IIM
024° 44' 47.29"N
093° 53' 25.28"E

Description
LLP 4B
Climb straight ahead, passing 3000ft turn left to establish R-200, climb to 11000ft at 16 D turn right to intercept 18D arc, then establish R-233 to join W83 outbound. Cross R-200/16D at or above 9400 ft OR as instructed by ATC.
POREG 4B
-Climb straight ahead, passing 3000ft turn left to establish R-200, climb to 11000ft at 16D turn right to intercept 18D arc, then establish R-249 to join W54 outbound. Cross R-200/16D at or above 9400 ft OR as instructed by ATC.
KKU 4B
-Climb straight ahead, passing 3000ft turn left to establish R-200, climb to 11000ft at 16 D turn right to intercept 18D arc, then establish R-282 to join W55 outbound. Cross R-200/16D at or above 9400 ft OR as instructed by ATC.

1:660,000

