




# TRITUS

**Grinder Pump** 

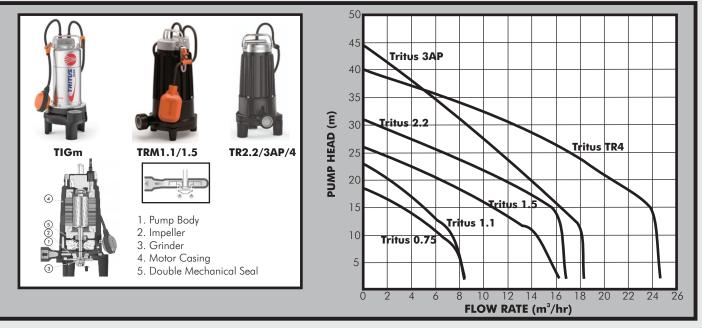

#### **PUMP**

Pedrollo Tritus Grinder pumps are of exceptionally robust, heavy duty specification specially designed for shredding solids and fibres found in wastewater and sewage allowing them to pass through small diameter pipes without blockage in domestic, agricultural, industrial and building site applications. The pump is provided with a superior and effective grinder made of hardened, highly resistant AISI 440F stainless steel and the pump body is made from heavy duty cast iron protected with an epoxy electrocoating (TGIm motor casing made of AISI 304 stainless steel). Other features include an open technopolymer impeller for 0.75kW to 1.1kW and AISI 304 stainless steel for the 1.5kW to 3kW pumps, double mechanical seals, a low level float switch with a patented fitting system (single phase pumps) and 10m cable.

### **MOTOR**

The pump is fitted with an integral TEFC motor and powered with a hermetically sealed induction motor with thermal overload protector incorporated into the winding. Single phase pump are supplied complete with an external floatswitch and control box with a manual reset motor protection with a starting and operating condenser while three phase pumps require a remote DOL starter.

Enclosure Class: IPX8 Insulation Class: F Speed: 2900rpm

## **OPERATING CONDITIONS**

**Pumped Liquid:** Thin, chemically non-aggressive liquids containing suspended particles

**Max. Liquid Temperature:**  $+40^{\circ}$ C

Min. Immersion Depth: 300mm (Tritus TIGm/TRM1.1), 350mm (Tritus TRm1.5, TR2.2/3AP/4)

**Max. Immersion Depth:** 5m (Tritus TIGm), 10m (Tritus 1.1/1.5/2.2/3AP/4) **Max Particle Size:** 85mm (Tritus TIGm,1.1), 95mm (Tritus 1.5/2.2/3AP/4)

## **PUMP DATA**

Model	Motor		Voltage	Current	DN	Dimensions(mm)					Weight
	kW	НР	(V)	(A)	(")	Α	В	н	Р	N	(kg)
Tritus TIGm 0.75	0.75	1	1x240	5.5	1½	115	85	398	500	500	16
Tritus TRm1.1	1.1	1.5		7.4	11/4	140	104	406			25.7
Tritus TRm1.5	1.5	2		10	1½	172	105	489	800	800	45
Tritus TR 2.2	2.2	3	3x415	5.5							44
Tritus TR 3 AP	3	4		6.3		203	126	480			53
Tritus TR 4	4	5.5		7.5							54

