


図面／規格
【Grooved nut (low type (2 types))】

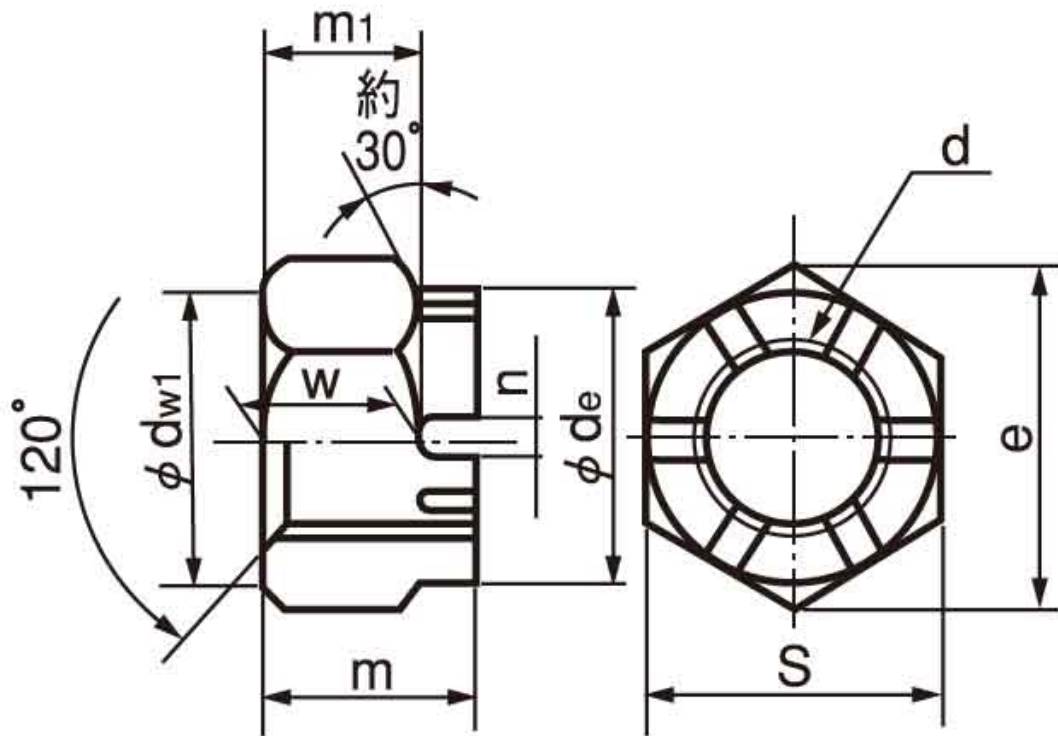

ねじの 呼び(d)	低 形				m1 約	S		dw1 約	de 約	n		溝の 数	(参考) 割ピンの 寸法
	基準 寸法	許容差 中	基準 寸法	許容差 中		基準 寸法	許容差 中			基準 寸法	許容差 中		
M10	8	0 -0.58	4.5	0 -0.48	-	17	0 -0.7	16.5	-	2.8	+0.3 0	6	2.5×25
M12	10		6			19		18	17	3.5			3.2×25
(M14)	11		7		7	22	0 -0.8	21	19				3.2×28
M16						24		23	22	4.5			4×32
(M18)	13		8	0 -0.58	8	27		26	25		+0.4 0		4×36
M20		0 -0.70				30		29	28				4×40
(M22)						32		31	30			8	5×40
M24	14		9		9	36	0 -1	34	34	5.5			5×45
(M27)	16		10		10	41		39	38				5×50
M30	18		11		11	46		44	42				6.3×56
(M33)	20		13		13	50		48	46	7			6.3×63
M36	21		14	0 -0.7	14	55		53	50				6.3×71
(M39)	23	0 -0.84	15		15	60		57	55			9	6.3×71
M42	25		16		16	65	0 -1.2	62	58				8×71
(M45)	27		18		18	70		67	62	9			8×80
M48	29		20		20	75		72	65		+0.5 0		8×80
(M52)	31		21		21	80		77	70				8×90
M56	34		23	0 -0.84	23	85		82	75			10	10×100
(M60)	36					90		87	80				10×100
M64	38	0 -1.0	25		25	95	0 -1.4	92	85	11			10×112
(M68)	40		27		27	100		97	90				10×125
M72	42		28		28	105		102	95				10×140
(M76)	46		32	0 -1.0	32	110		107	100				
M80	48		34		34	115		112	105				