


図面／規格  
【(+)-Pan P = 2】

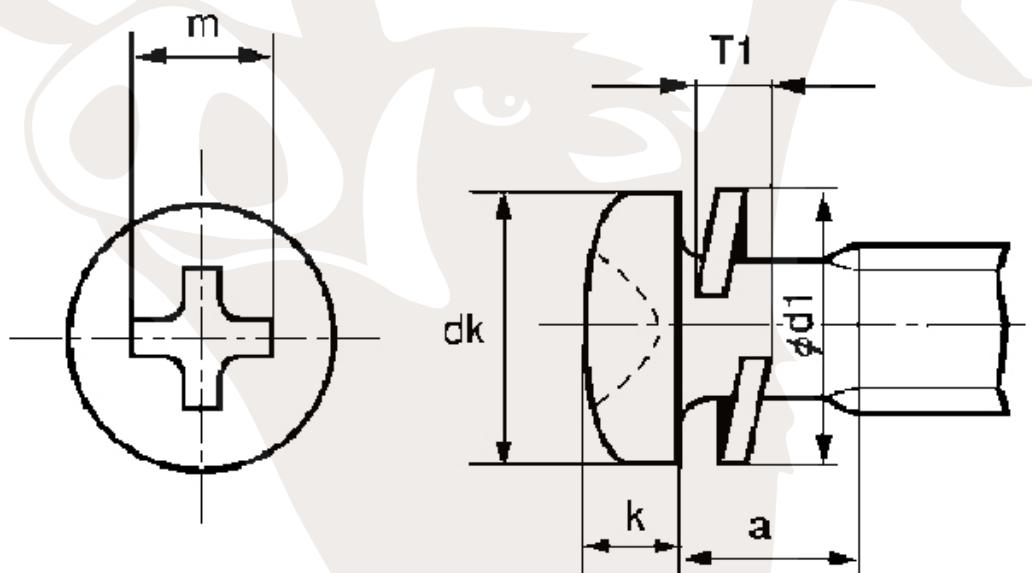

| ねじの呼び | dk   |           | k    |       | 十字穴 |       | ばね座金<br>D1(最大) | a<br>(最大値) |
|-------|------|-----------|------|-------|-----|-------|----------------|------------|
|       | 基準寸法 | 許容差       | 基準寸法 | 許容差   | 番号  | m(参考) |                |            |
| M2    | 3.5  | 0<br>-0.4 | 1.3  | ±0.1  | 1   | 2.2   | 4              | 1.8        |
| M2.3  | 4    | 0<br>-0.4 | 1.5  | ±0.1  | 1   | 2.4   | 4.6            | 2.0        |
| M2.5  | 4.5  | 0<br>-0.4 | 1.7  | ±0.1  | 1   | 2.6   | 4.8            | 2.1        |
| M2.6  | 4.5  | 0<br>-0.4 | 1.7  | ±0.1  | 1   | 2.6   | 4.8            | 2.1        |
| M3    | 5.5  | 0<br>-0.5 | 2    | ±0.15 | 2   | 3.6   | 5.5            | 2.4        |
| M3.5  | 6    | 0<br>-0.5 | 2.3  | ±0.15 | 2   | 3.9   | 6.2            | 2.8        |
| M4    | 7    | 0<br>-0.5 | 2.6  | ±0.15 | 2   | 4.2   | 7              | 3.5        |
| M5    | 9    | 0<br>-0.6 | 3.3  | ±0.15 | 2   | 4.9   | 8.5            | 4.3        |
| M6    | 10.5 | 0<br>-0.7 | 3.9  | ±0.2  | 3   | 6.3   | 11.5           | 5.1        |
| M8    | 14   | 0<br>-0.8 | 5.2  | ±0.2  | 3   | 7.8   | 14.5           | 6.7        |
| M10   | 19   | 0<br>-1.5 | 6    | ±1    | 4   | 9.4   | 17.5           | 8.2        |