


Drawing / Standard
【Flange Head Cap Screw】

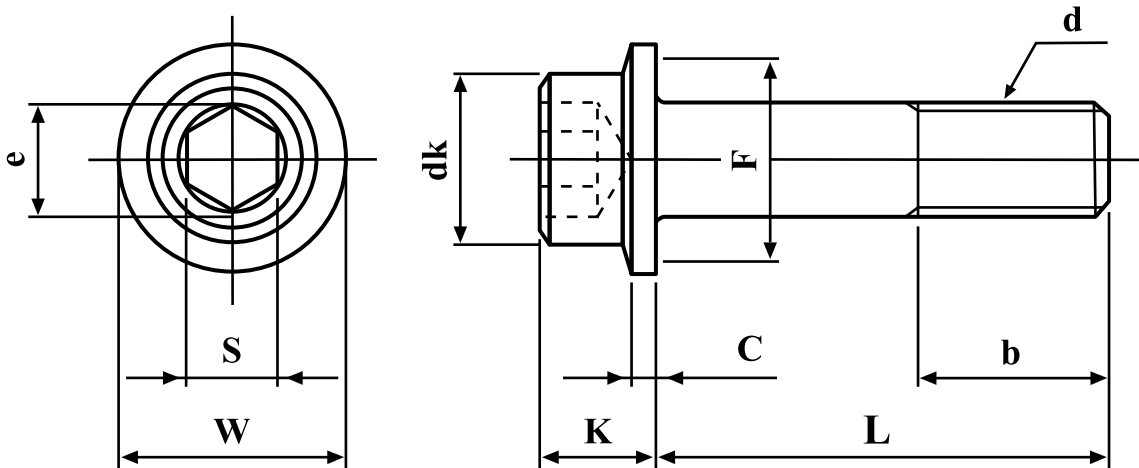

Nominal size (d)	Pitch	b	dk		K		s	e	W	F	C
		Reference	Dimension	Tolerance	Dimension	Tolerance	Nominal diameter	Min.	Max.	Min.	Min.
M3	0.5	12	5.5	$\begin{smallmatrix} 0 \\ -0.3 \end{smallmatrix}$	3	$\begin{smallmatrix} 0 \\ -0.25 \end{smallmatrix}$	2.5	2.873	7.5	6.3	0.6
M4	0.7	14	7.0	$\begin{smallmatrix} 0 \\ -0.36 \end{smallmatrix}$	4	$\begin{smallmatrix} 0 \\ -0.3 \end{smallmatrix}$	3	3.443	9	7.5	0.8
M5	0.8	16	8.5		5		4	4.583	11	9.3	1.0
M6	1.0	18	10		6		5	5.723	12.5	10.7	1.6
M8	1.25	22	13	$\begin{smallmatrix} 0 \\ -0.43 \end{smallmatrix}$	8	$\begin{smallmatrix} 0 \\ -0.36 \end{smallmatrix}$	6	6.863	17	14.6	1.6
M10	1.5	26	16		10		8	9.149	21	18.0	2.0
M12	1.75	30	18		12	$\begin{smallmatrix} 0 \\ -0.43 \end{smallmatrix}$	10	11.429	24	20.5	2.5