

KAMAYA ELECTRIC SLITLINE MEASUREMENT CONTROL & STANDARD

DATE : 26th AUG 2016

1. SAMPLE VERIFICATION

CONFIDENTIAL



DE-16			HG-12			MT-24		
Kamaya	Maruwa	Diff	Kamaya	Maruwa	Diff	Kamaya	Maruwa	Diff
276	242	34	292	265	27	204	260	-56
304	243	61	334	276	58	205	258	-53
296	249	47	307	262	45	219	266	-47
278	250	28	283	272	11	223	256	-33
294	252	42	298	268	30	202	261	-59
277	243	34	285	274	11	199	262	-63
271	240	31	287	274	13	215	263	-48
296	244	52	286	270	16	234	262	-28
285	245	40	277	271	6	221	264	-43
283	241	42	270	275	-5	223	261	-38
303	268	35	292	274	18	281	280	1
269	247	22	280	265	15	281	266	15
271	259	12	279	266	13	273	267	6
274	268	6	278	272	6	289	272	17
254	264	-10	272	269	3	282	268	14
260	263	-3	278	276	2	279	274	5
263	257	6	291	270	21	283	274	9
262	256	6	284	277	7	292	270	22
252	268	-16	289	269	20	272	271	1
267	253	14	282	262	20	269	275	-6
296	259	37	228	273	-45	274	258	16
338	258	80	213	266	-53	330	266	64
299	258	41	229	264	-35	292	261	31
304	250	54	217	276	-59	301	266	35
295	258	37	219	260	-41	283	269	14
284	247	37	217	273	-56	286	266	20
305	259	46	214	267	-53	277	264	13
280	246	34	214	272	-58	271	267	4
291	259	32	221	263	-42	271	264	7
308	262	46	216	265	-49	277	257	20
338	268		334	277		330	280	
252	240		213	260		199	256	
285	254	31	264	270	-5	260	266	-5
86	28		121	17		131	24	

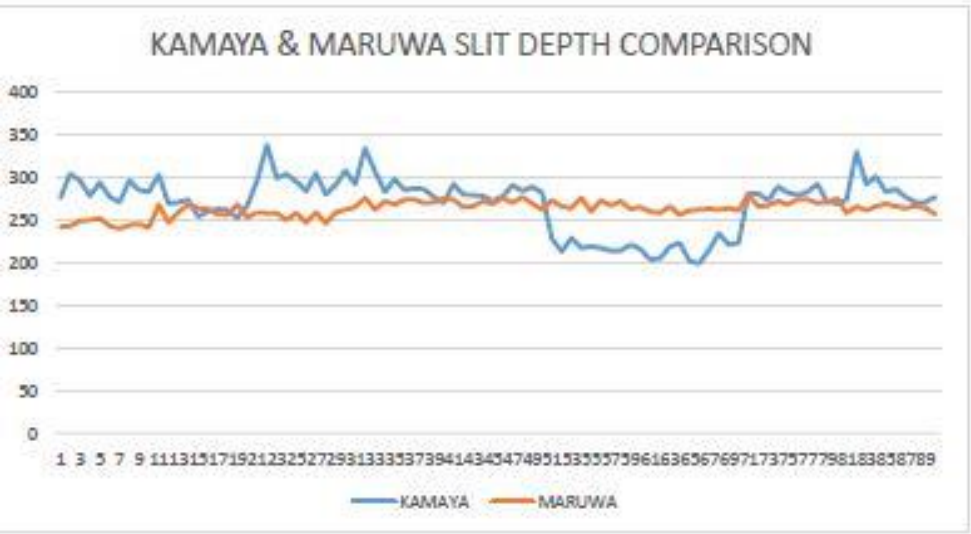

Analysis

- 1. Kamaya's slit line measurement inconsistent and is difficult to judge whether is deep or shallow
- 2. The product produced will impact on other customer (breakage issue – shallow – KAMAYA method))
- 3. Overall all NG sample are within the drawing spec (MARUWA method)

SLITLINE MEASUREMENT METHOD

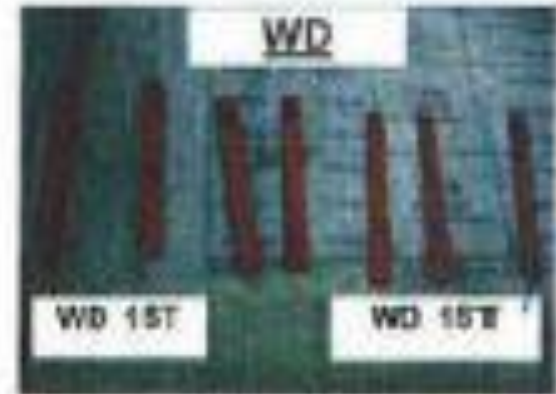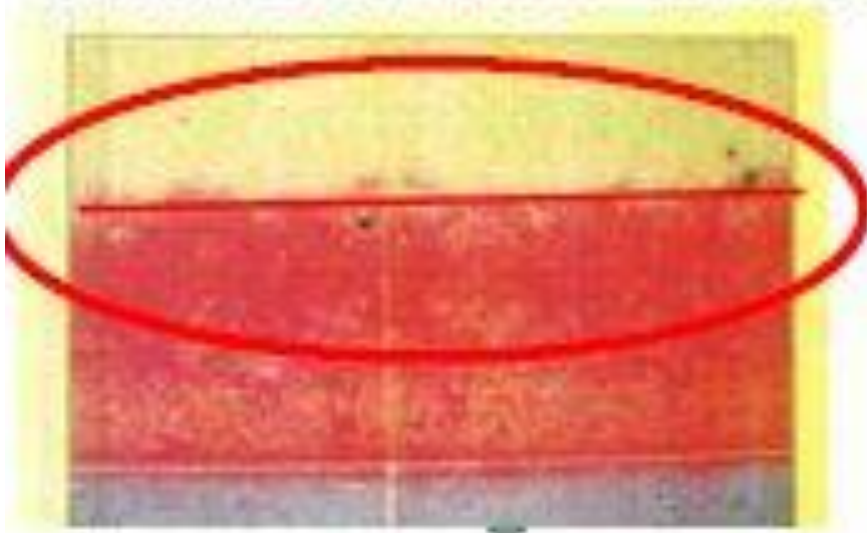


Measurement point is between highest peak & lowest peak. In other words, the cross line will be on the average point

SLITLINE DATA TREND



WD TREND : LOT NO: DE-16, HG-12 & MT-24

CONFIDENTIAL

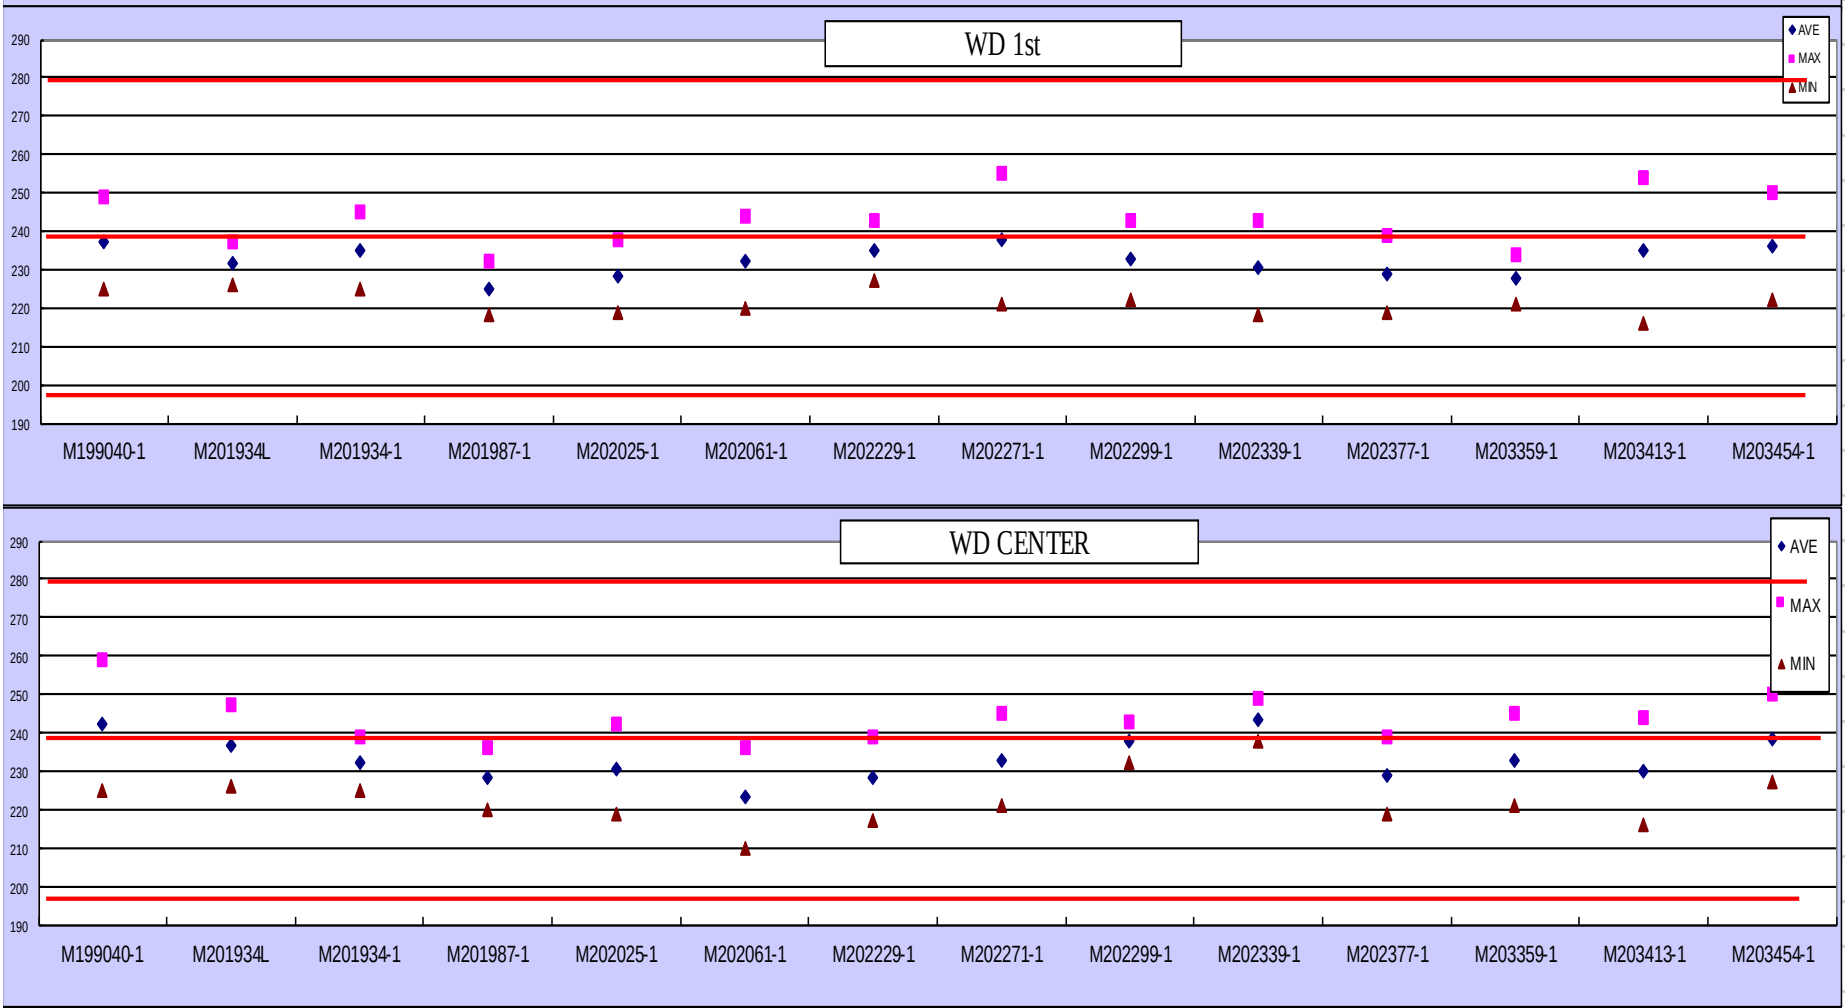


SLITLINE DATA TREND



LD TREND : LOT NO: DE-16, HG-12 & MT-24

CONFIDENTIAL

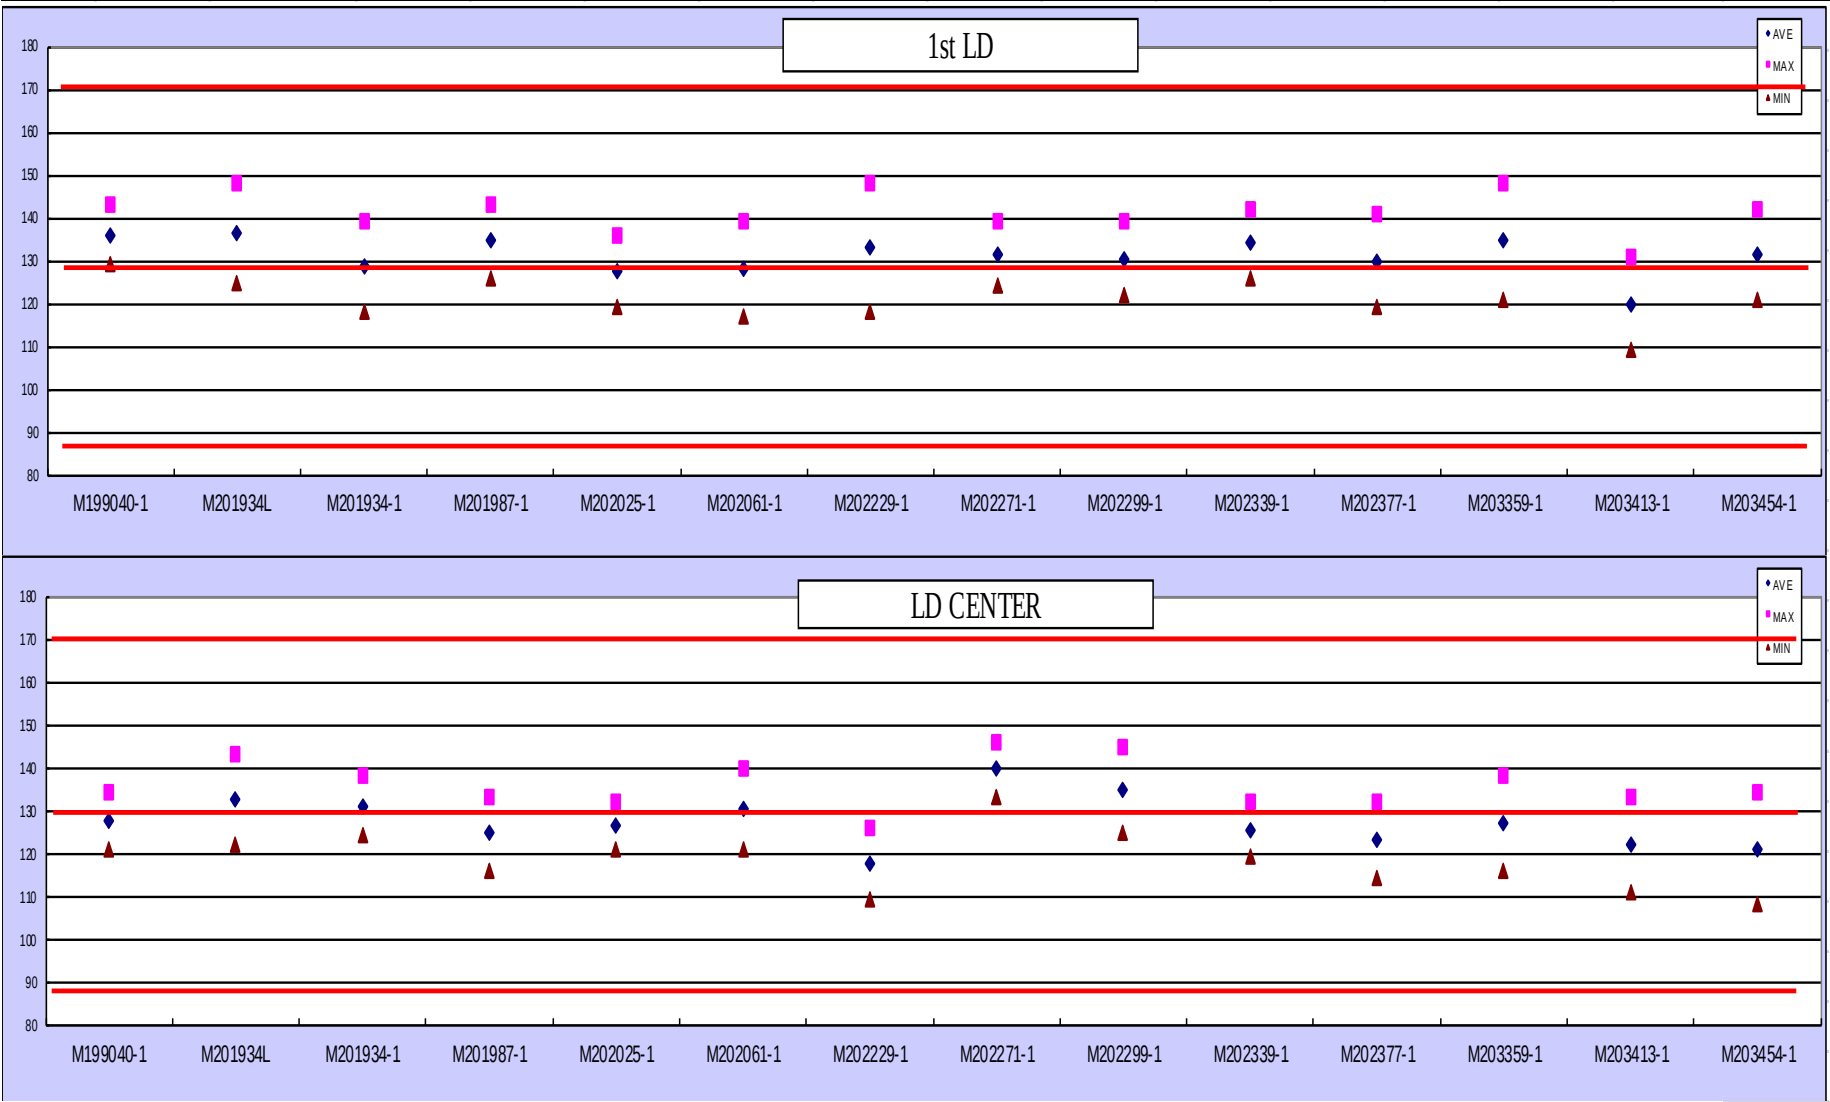

- 1. MARUWA propose to remain the current measurement method for slit line**
 - 2. Change of method will impact on other customers verification on slit line**
 - 3. The different method product not able to shipout to other customers (RISK of breakage issue)**
-

THANK
YOU
