



INSPECTION STANDARD (HT LAB)

Page 01 of 01



125

☐ Prototype	☐ Pre-Launch	☒ Production	Date (Original)	17-08-2015
Part Name:- Planet Gear Z-28		Part No.:- 10069172AA	Inspection Standard Number	SIP/4140/120
Customer :- ITL		Change Level.:-00	Part Stage	HT Lab.


Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness	*	58-62 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
2.	ECD Measured On PCD To HV530 At 1 Kg Load	*	0.65-0.95 mm	Micro Vicker, Vicker Hardness Tester	1Pc/Lot	FMT-HT-39	A
3.	Core Hardness At PCD	*	42 HRC Max	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
4.	Core Hardness At RCD	*	30 HRC Min	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
5.	Micro Case	*	Tempered Martensite+ RA<15% No Carbide Network Required	Microscope	1Pc/Lot	FMT-HT-39	A
6.	Core Micro	*	Bainite/Sorbite Free Ferrite<10%	Microscope	1Pc/Lot	FMT-HT-39	A

Space For Sketch:-

Material-SAE 8620

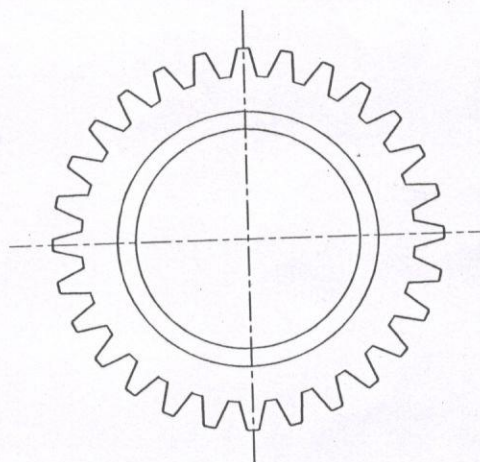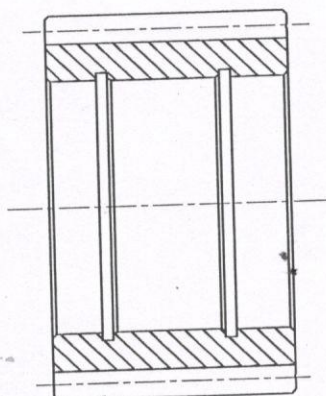

CONTROLLED COPY
SR NO. 01
ISSUED TO Unit-7 (HT Lab)
DATE 25/08/22

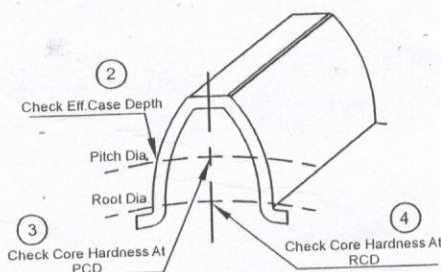

Reaction Plan: A-यदि Inspection करते समय कम्पानेंट खराब मिले तो खराब कम्पानेंट का Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें।

Legends: ☒ Special Characteristics as Per Drawing ☒ * Special Characteristics For Process ☒ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change

Checked By:

Approved By: