



INSPECTION STANDARD (HT LAB)



202

☐ Prototype	☒ Pre-Launch	☐ Production	Date (Original)	28/01/19
Part Name:- Pinion PTO 3.312:1 Main Drive Shaft		Part No.:- 1677740M02	Inspection Standard Number SIP/4310/110	
Customer :- TAFE		Change Level.:- A	Part Stage HT Lab.	

Sr.No.	Parameter	Special Char. Class	Methods				React Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness On Spline Teeth	*	58~63 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
2.	Surface Hardness On Internal Bore	*	58 Min. HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
3.	Core Hardness	*	27~41 HRC	Rockwell Hardness Tester	1Pc/Lot	FMT-HT-39	A
4.	ECD Measured To 513HV (at 0.3 Kg Load)	*	0.76~1.14 mm	Vicker Hardness Tester	1Pc/Lot	FMT-HT-39	A
5.	Surface Carbon Content	*	0.80~1.10%	Microscope	1Pc/Lot	FMT-HT-39	A
6.	Case Depth at mid Point of tooth profile from end of tooth	*	6.4 mm	Vernier Caliper	1Pc/Lot	FMT-HT-39	A
7.	Core Hardness on tooth centerline at root diameter from end of tooth	*	6.4 mm	Vernier Caliper	1Pc/Lot	FMT-HT-39	A
8.	Micro Case	*	Tempered Martensite + RA<15%	Microscope	1Pc/Lot	FMT-HT-39	A
9.	Core Micro	*	LCM+Bainite	Microscope	1Pc/Lot	FMT-HT-39	A
10.	IGO	*	35 Micron Max.	Microscope	1Pc/Lot	FMT-HT-39	A

OPEN SKETCH

Material-16MnCr5

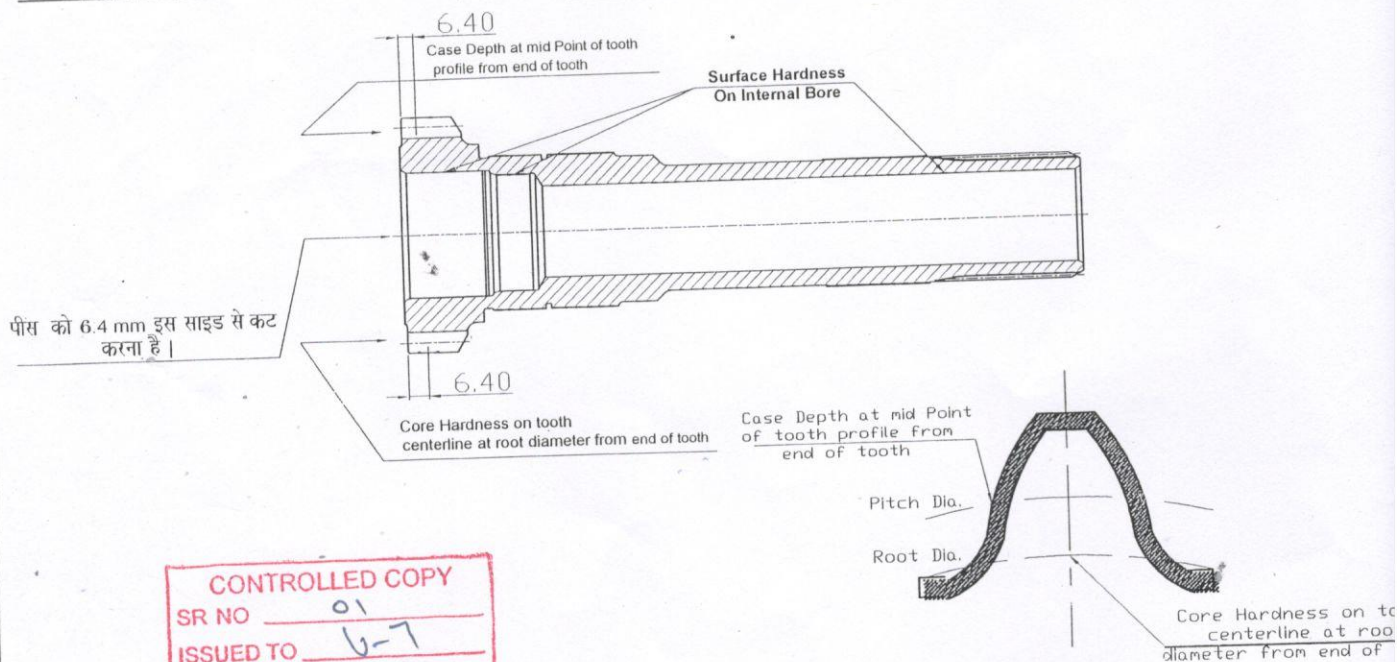

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में Department के Incharge को बतायें।

Legends: ☒ Special Characteristics as Per Drawing ☒ Special Characteristics For Process ☒ Special Characteristics For

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for C
19-04-23	A						

Prepared By:

Checked By:

Approved By: