





INSPECTION STANDARD (HT LAB)



☐ Prototype	☒ Pre-Launch	☐ Production	Date (Original)	25/03/2022			
Part Name:- SHAFT PTO INPUT 21-T		Part No.:- P80001296A		Inspection Standard Number		SIP/4482/170	
		Change Level.:-00		Part Stage		Hard	
Sr.No.	Parameter	Special Char. Class	Methods				Reaction Plan
			Product Specification	Inspection Method	Inspection Frequency	Control Method	
1.	Surface Hardness	*	58~63 HRC	Rockwell Hardness Tester	1Pc/lot	HT Lab Report	A
2.	ECD at PCD of Gear Tooth at (5131IV1)	*	0.5~0.8 mm	Micro Vicker / Vicker Hardness Tester	1Pc/lot	HT Lab Report	A
3.	Core Hardness at PCD	*	32~42 HRC	Rockwell Hardness Tester	1Pc/lot	HT Lab Report	A
4.	Core Hardness at RCD	*	32~42 HRC	Rockwell Hardness Tester	1Pc/lot	HT Lab Report	A
5.	Micro Case	*	Tempered Martensitec (min 90%)& RA<10%max without any carbide network	Microscope	1Pc/lot	HT Lab Report	A
6.	Micro Core	*	Bainite+Sorbide with not more than 5% Free Ferrite	Microscope	1Pc/lot	HT Lab Report	A

SKETCH:-

Material Grade:- 20MnCr5

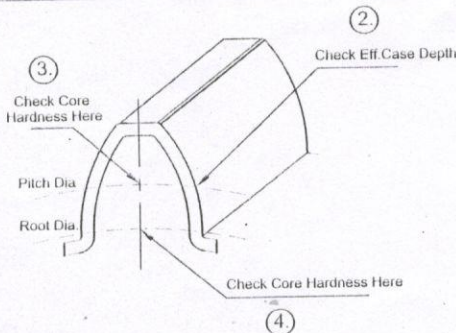

ECD Checking Pattern Details

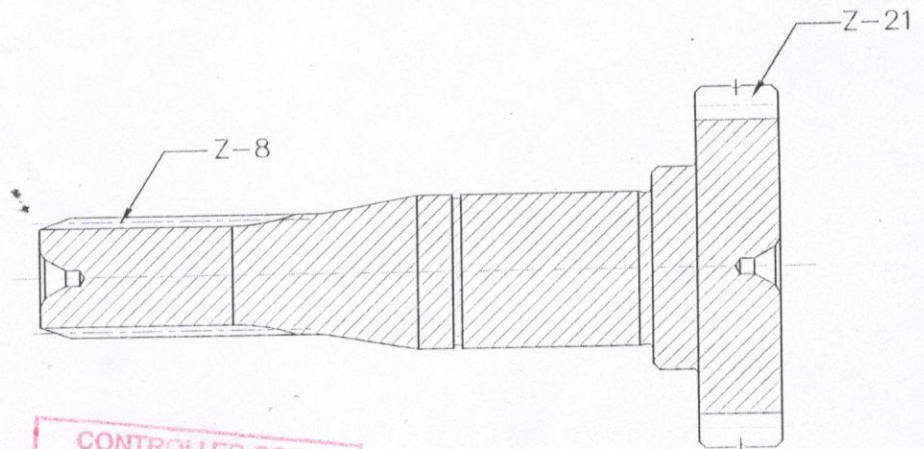

Reaction Plan: A-यदि Inspection करते समय कम्पोनेंट खराब मिले तो खराब कम्पोनेंट को Rejection का टैग लगाकर Rejection टेबल पर रखें और उसके बारे में

Department के Incharge को बतायें।

Legends:

Special Characteristics as Per Drawing

* Special Characteristics For-Process

△ Special Characteristics For Safety

Change Details

Date	Rev. No.	Change	Reason for Change	Date	Rev. No.	Change	Reason for Change